


STANDARD INSTRUMENT
DEPARTURE CHART (SID) -
ICAO

HGT and ALT in ft
BRG are MAG (True)
TA 5000 ft AMSL

HALMSTAD TOWER	130.105
	135.055

RNAV (GNSS) RWY 19

VAKTA 4L

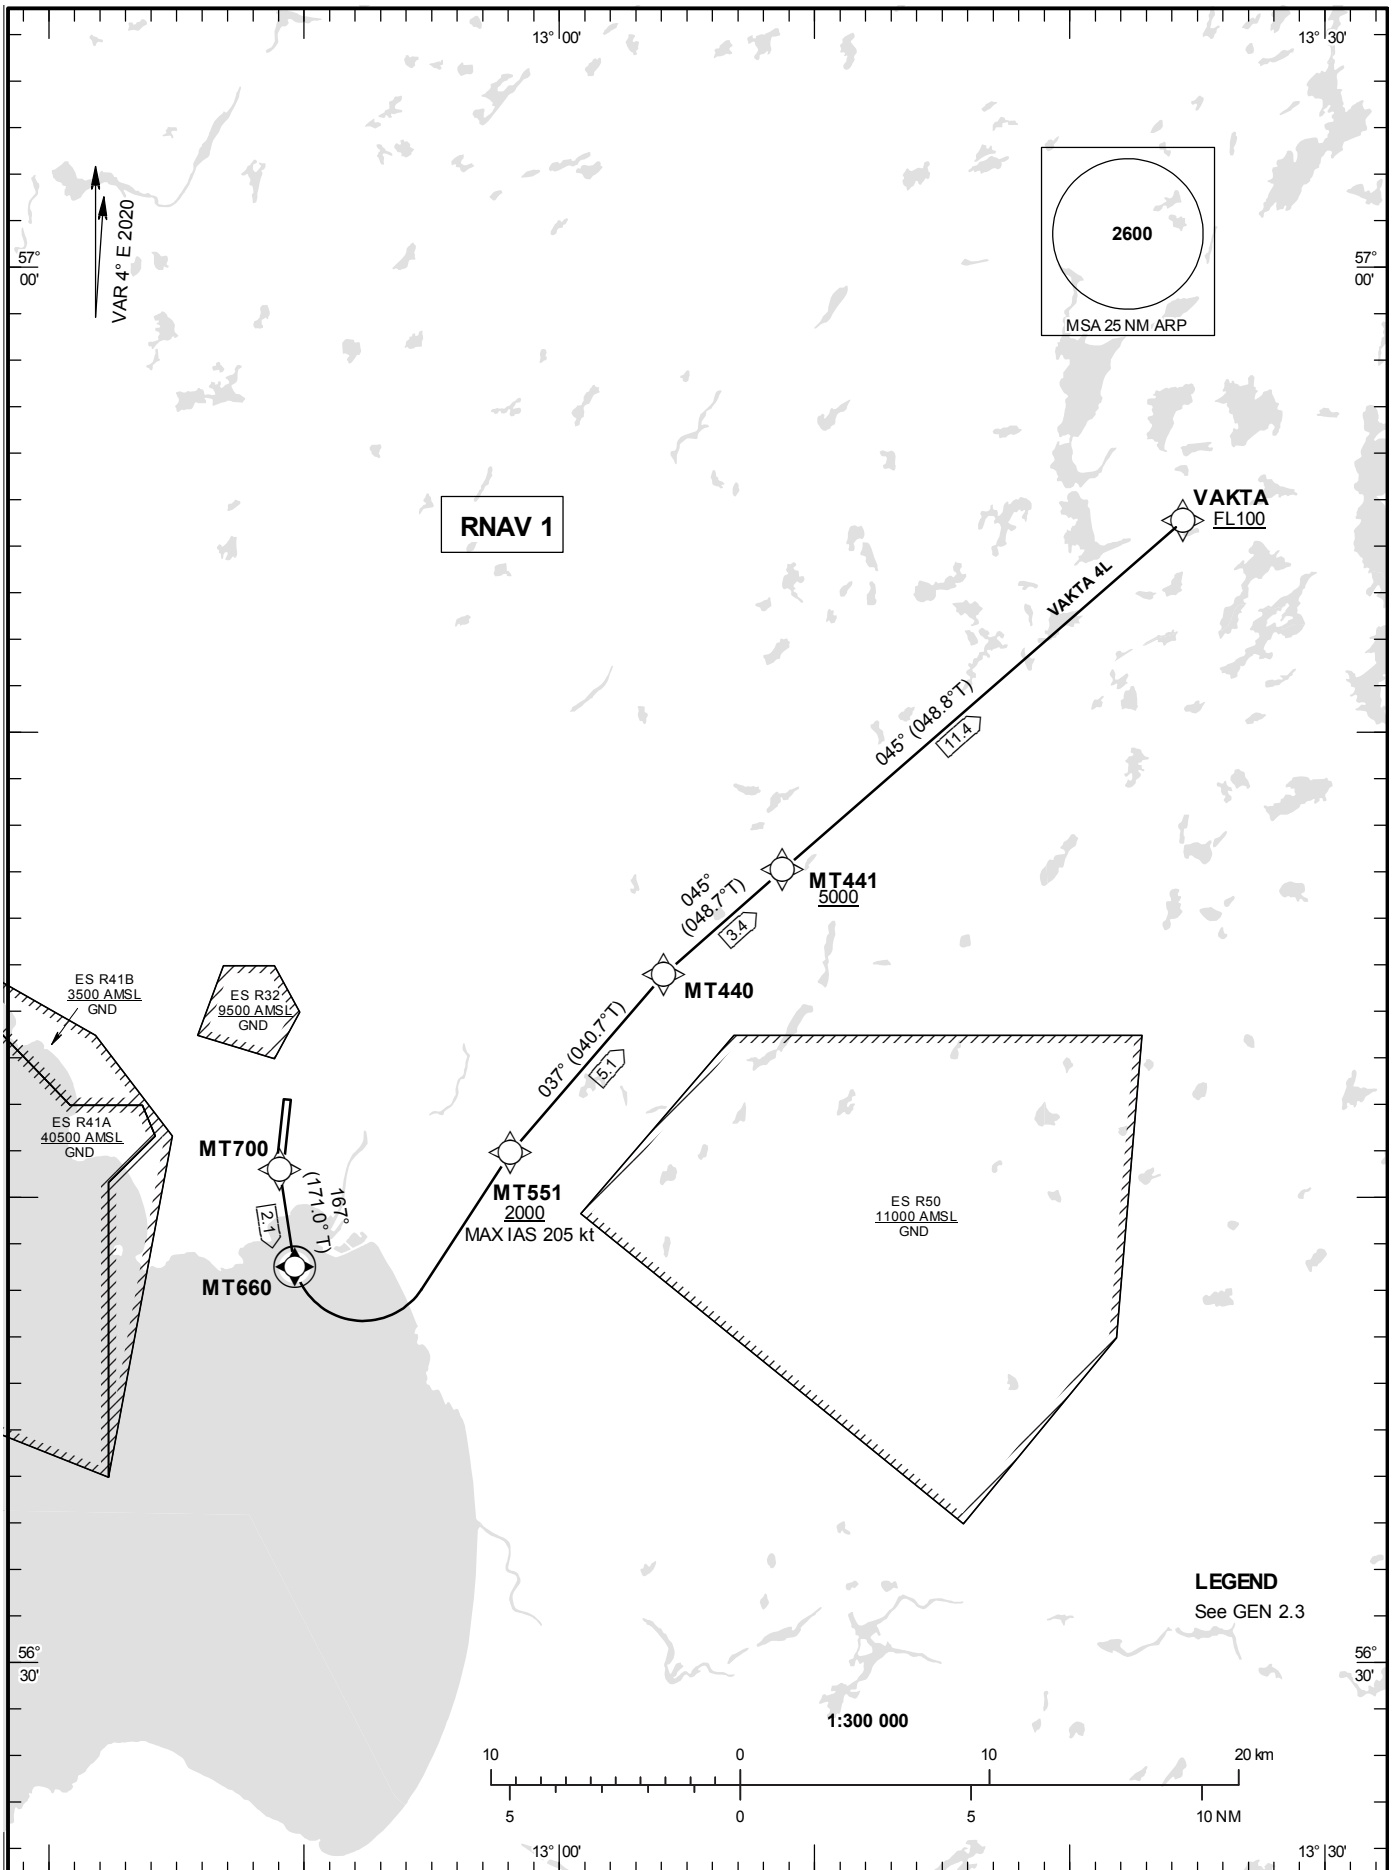

Prescribed Coding of RNAV SID for RWY 19

VAKTA 4L

Path Desc	Waypoint Identifier	Fly-over	Course °M(°T)	Dist (NM)	Turn Dir	Altitude	Speed	VPA/RDH	Rec Navaid	Navigation Specification
DF	MT700	-	-	-	-	-	-	-	-	RNAV 1
TF	MT660	Y	167°(171.0°)	2.1	-	-	-	-	-	RNAV 1
DF	MT551	-	-	-	L	+2000	-205	-	-	RNAV 1
TF	MT440	-	037°(040.7°)	5.1	-	-	-	-	-	RNAV 1
TF	MT441	-	045°(048.7°)	3.4	-	+5000	-	-	-	RNAV 1
TF	VAKTA	-	045°(048.8°)	11.4	-	+FL100	-	-	-	RNAV 1

SID instruction: MT700 – MT660 – MT 551 (max IAS 205 until MT551, min 2000 ft) – MT440 – MT441 (min 5000 ft) – VAKTA (min FL 100)