


STANDARD INSTRUMENT  
DEPARTURE CHART (SID) -  
ICAO

HGT and ALT in ft  
BRG are MAG  
TA 5000 ft AMSL

KARLSTAD TOWER 119.455

RNP RWY 03

TESDI 1G, SIPSI 1G

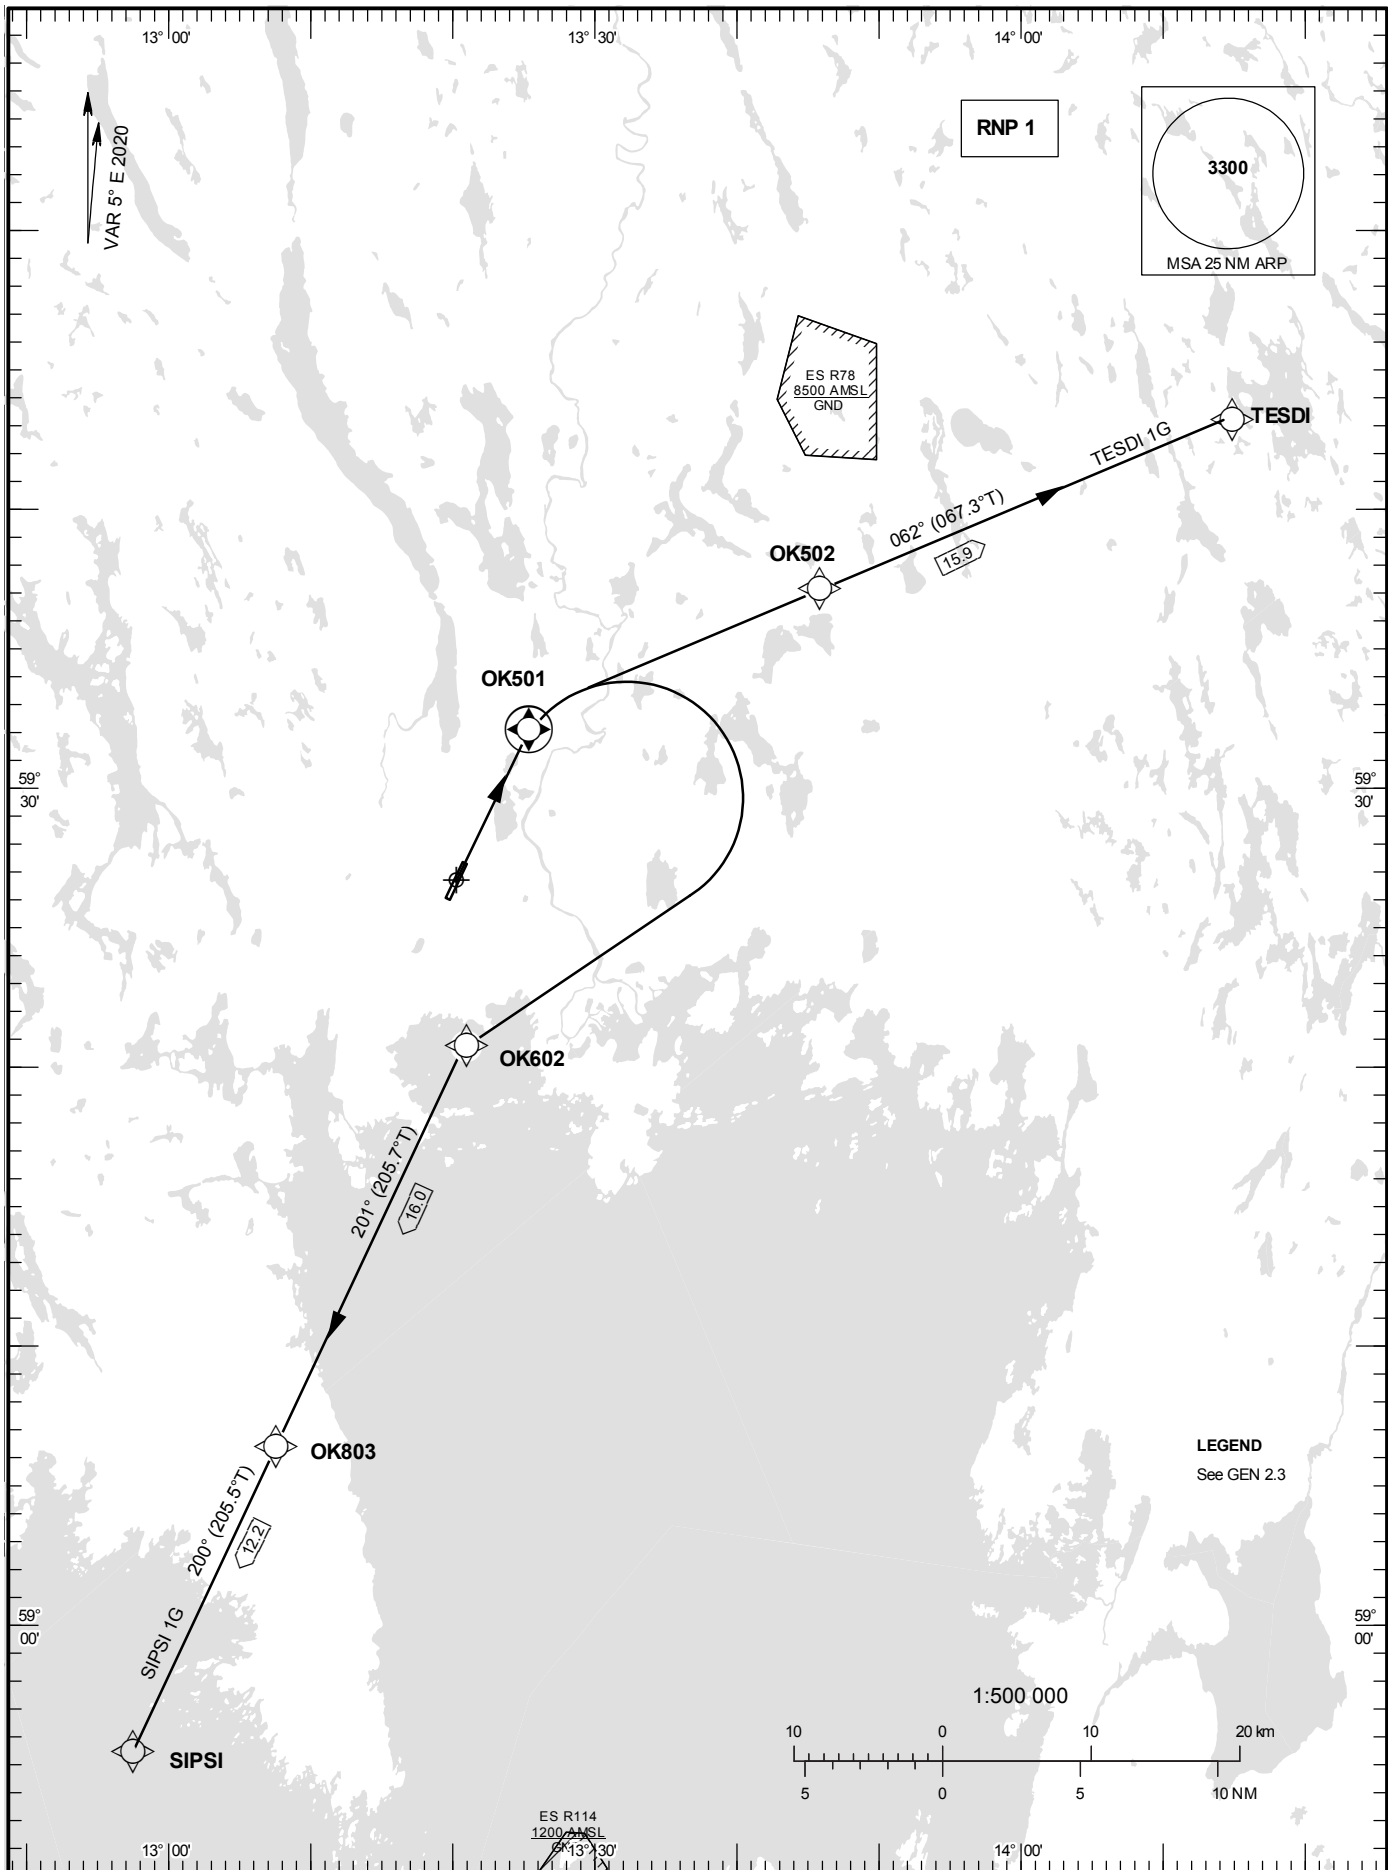

**Prescribed Coding of SID for RWY 03****NOTES:**

Operators unable to fly RNP 1 shall inform ATC "UNABLE RNP SID". Radar vectors will then be provided.

For ATC reasons, aircraft proceeding on SID shall use 6.6 % (400 ft/NM) as minimum climb gradient. Aircraft unable to meet with this procedure shall inform ATC.

**TESDI 1G**

| Path Term | Waypoint Identifier | Fly-over | Course °M(°T) | Dist (NM) | Turn Dir | Rest Alts (ft AMSL) | Speed Limits (kt) | VPA/RDH (°/ft) | Rec Navaid | Navigation Specification |
|-----------|---------------------|----------|---------------|-----------|----------|---------------------|-------------------|----------------|------------|--------------------------|
| DF        | OK501               | Y        | -             | -         | -        | -                   | -                 | -              | -          | RNP 1                    |
| DF        | OK502               | -        | -             | -         | R        | -                   | -                 | -              | -          | RNP 1                    |
| TF        | TESDI               | -        | 062°(067.3°)  | 15.9      | -        | -                   | -                 | -              | -          | RNP 1                    |

SID instruction: OK501 – OK502 – TESDI.

**SIPSI 1G**

| Path Term | Waypoint Identifier | Fly-over | Course °M(°T) | Dist (NM) | Turn Dir | Rest Alts (ft AMSL) | Speed Limits (kt) | VPA/RDH (°/ft) | Rec Navaid | Navigation Specification |
|-----------|---------------------|----------|---------------|-----------|----------|---------------------|-------------------|----------------|------------|--------------------------|
| DF        | OK501               | Y        | -             | -         | -        | -                   | -                 | -              | -          | RNP 1                    |
| DF        | OK602               | -        | -             | -         | R        | -                   | -                 | -              | -          | RNP 1                    |
| TF        | OK803               | -        | 201°(205.7°)  | 16.0      | L        | -                   | -                 | -              | -          | RNP 1                    |
| TF        | SIPSI               | -        | 200°(205.5°)  | 12.2      | -        | -                   | -                 | -              | -          | RNP 1                    |

SID instruction: OK501 – OK602 – OK803 – SIPSI.