


STANDARD INSTRUMENT
ARRIVAL CHART (STAR) -
ICAO

HGT and ALT in ft
BRG are MAG (True)
TA 5000 ft AMSL

STURUP TOWER	118.805
SWEDEN CONTROL	134.980
STURUP ATIS	129.280

RNAV (GNSS) STAR RWY 17

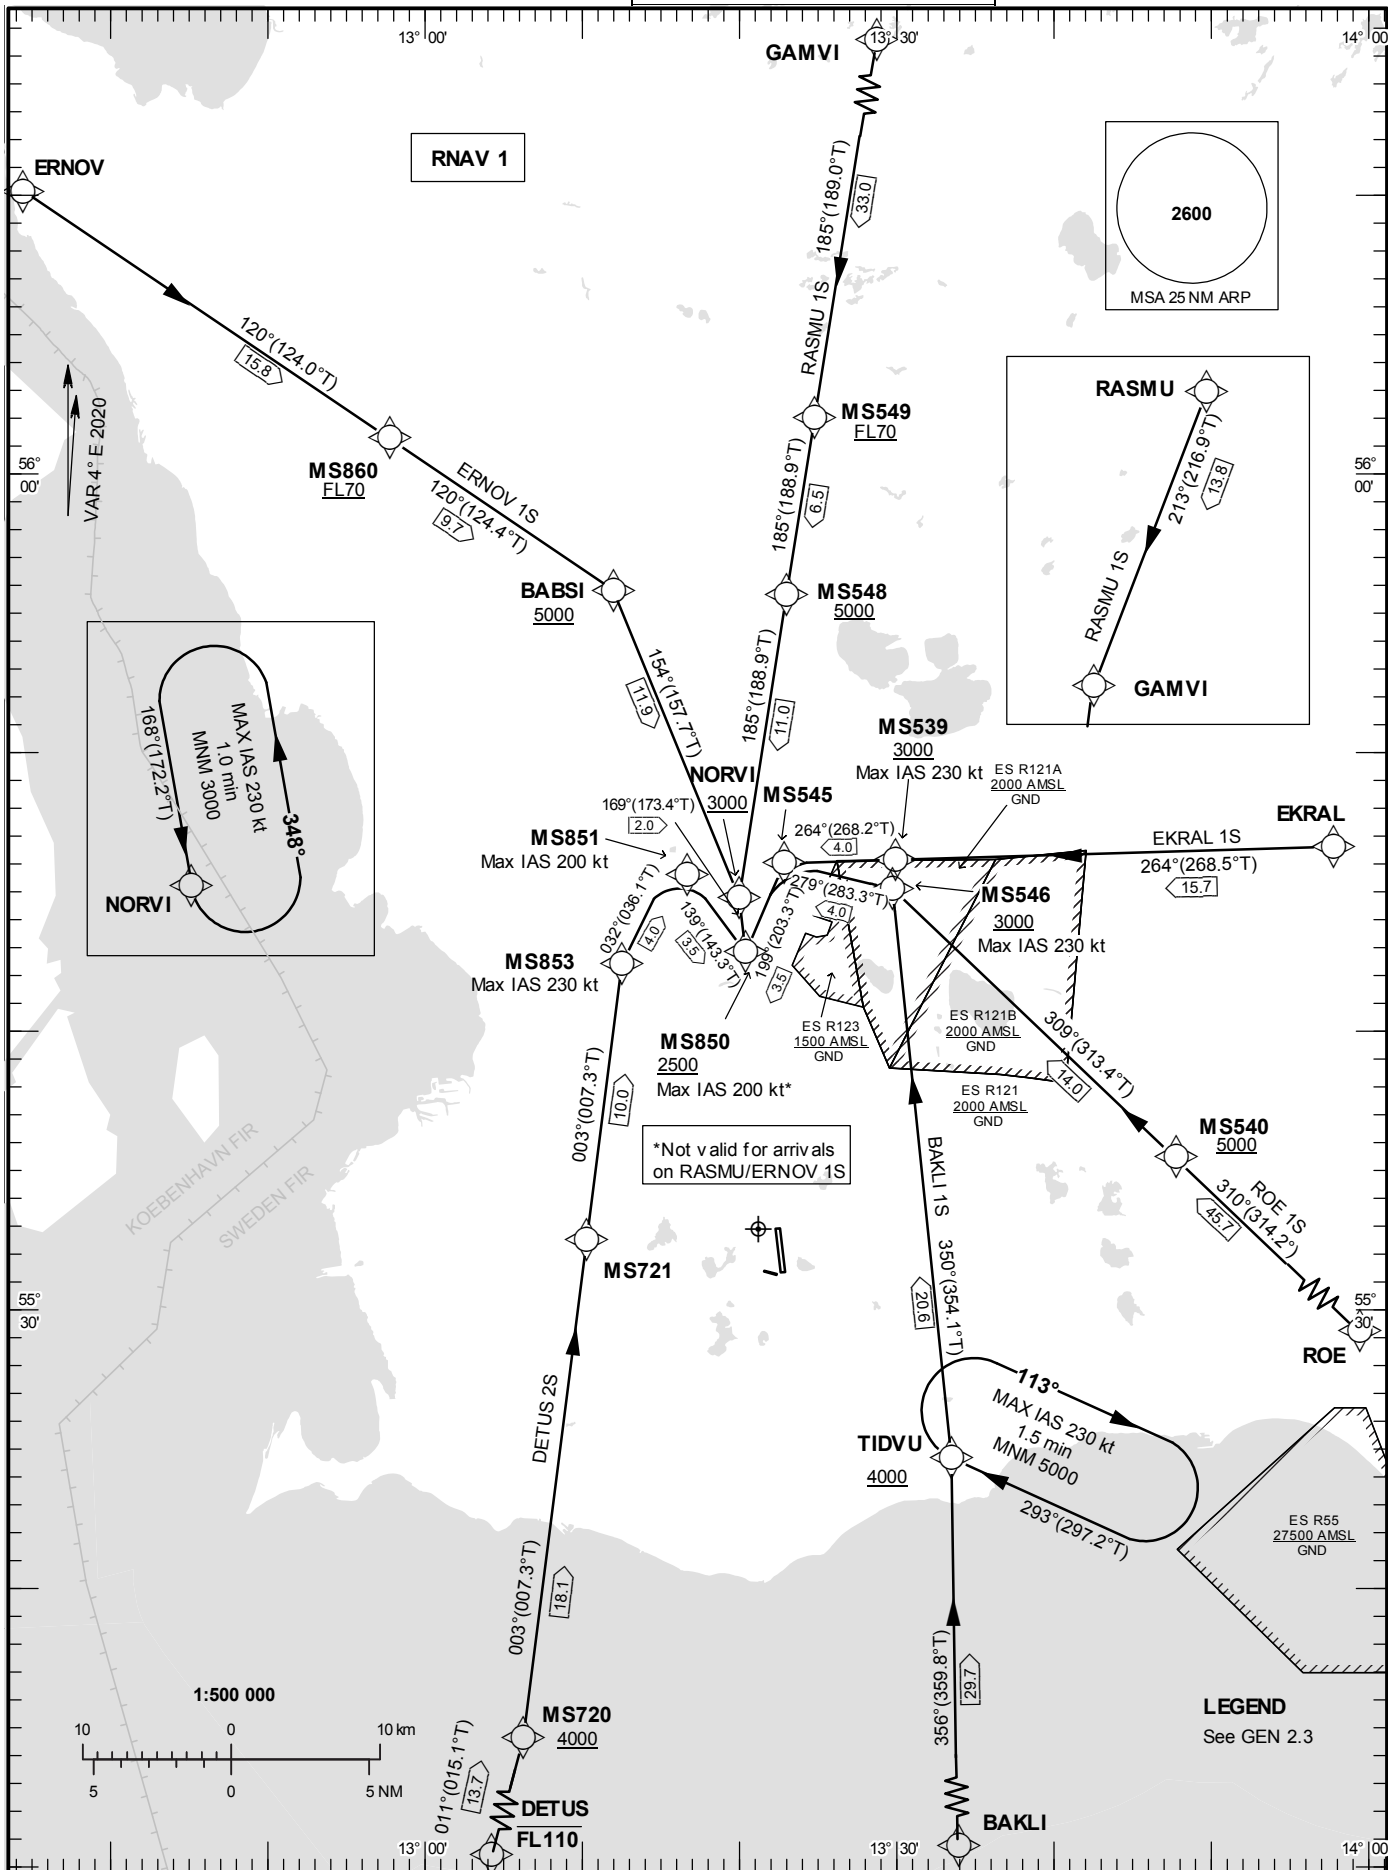

Prescribed Coding of RNAV STAR for RWY 17

RNAV 1 required, otherwise advise ATC.

RNAV STAR are based on GNSS only for position update.

At waypoints with a speed restriction only, an altitude has been added in the coding table in order to adapt to certain FMS equipments.

BAKLI 1S

Path Term	Waypoint Identifier	Fly-over	Course °M(°T)	Dist (NM)	Turn Dir	Rest Alts (ft AMSL)	Speed Limits (kt)	VPA/RDH (°/ft)	Rec Navaid	Navigation Specification
IF	BAKLI	-	-	-	-	-	-	-	-	RNAV 1
TF	TIDVU	-	356°(359.8°)	29.7	-	+4000	-	-	-	RNAV 1
TF	MS546	-	350°(354.1°)	20.6	-	+3000	-230	-	-	RNAV 1
TF	MS545	-	279°(283.3°)	4.0	-	-	-	-	-	RNAV 1
TF	MS850	-	199°(203.3°)	3.5	-	+2500	-200	-	-	RNAV 1

STAR instruction: BAKLI – TIDVU (4000 ft or above) – MS546 (max IAS 230 kt, 3000 ft or above) – MS545 – MS850 (max IAS 200 kt, 2500 ft or above)

DETUS 2S

Path Term	Waypoint Identifier	Fly-over	Course °M(°T)	Dist (NM)	Turn Dir	Rest Alts (ft AMSL)	Speed Limits (kt)	VPA/RDH (°/ft)	Rec Navaid	Navigation Specification
IF	DETUS	-	-	-	-	-FL110	-	-	-	RNAV 1
TF	MS720	-	011°(015.1°)	13.7	-	+4000	-	-	-	RNAV 1
TF	MS721	-	003°(007.3°)	18.1	-	-	-	-	-	RNAV 1
TF	MS853	-	003°(007.3°)	10.0	-	-	-230	-	-	RNAV 1
TF	MS851	-	032°(036.1°)	4.0	-	-	-200	-	-	RNAV 1
TF	MS850	-	139°(143.3°)	3.5	R	+2500	-200	-	-	RNAV 1

STAR instruction: DETUS (FL110 or below) – MS720 (4000 ft or above) – MS721 – MS853 (max IAS 230 kt) – MS851 (max IAS 200 kt) – MS850 (max IAS 200kt, 2500 ft or above)

EKRAL 1S

Path Term	Waypoint Identifier	Fly-over	Course °M(°T)	Dist (NM)	Turn Dir	Rest Alts (ft AMSL)	Speed Limits (kt)	VPA/RDH (°/ft)	Rec Navaid	Navigation Specification
IF	EKRAL	-	-	-	-	-	-	-	-	RNAV 1
TF	MS539	-	264°(268.5°)	15.7	-	+3000	-230	-	-	RNAV 1
TF	MS545	-	264°(268.2°)	4.0	-	-	-	-	-	RNAV 1
TF	MS850	-	199°(203.3°)	3.5	-	+2500	-200	-	-	RNAV 1

STAR instruction: EKRAL – MS539 (max IAS 230 kt, 3000 ft or above) – MS545 – MS850 (max IAS 200 kt, 2500 ft or above)

ERNOV 1S

Path Term	Waypoint Identifier	Fly-over	Course °M(°T)	Dist (NM)	Turn Dir	Rest Alts (ft AMSL)	Speed Limits (kt)	VPA/ RDH (°/ft)	Rec Navaid	Navigation Specification
IF	ERNOV	-	-	-	-	-	-	-	-	RNAV 1
TF	MS860	-	120°(124.0°)	15.8	-	+FL70	-	-	-	RNAV 1
TF	BABSI	-	120°(124.4°)	9.7	-	+5000	-	-	-	RNAV 1
TF	NORVI	-	154°(157.7°)	11.9	-	+3000	-	-	-	RNAV 1
TF	MS850	-	169°(173.4°)	2.0	-	+2500	-	-	-	RNAV 1

STAR instruction: ERNOV – MS860 (FL70 or above) – BABSI (5000 ft or above) – NORVI (3000 ft or above) – MS850 (2500 ft or above)

RASMU 1S

Path Term	Waypoint Identifier	Fly-over	Course °M(°T)	Dist (NM)	Turn Dir	Rest Alts (ft AMSL)	Speed Limits (kt)	VPA/ RDH (°/ft)	Rec Navaid	Navigation Specification
IF	RASMU	-	-	-	-	-	-	-	-	RNAV 1
TF	GAMVI	-	213°(216.9°)	13.8	-	-	-	-	-	RNAV 1
TF	MS549	-	185°(189.0°)	33.0	-	+FL70	-	-	-	RNAV 1
TF	MS548	-	185°(188.9°)	6.5	-	+5000	-	-	-	RNAV 1
TF	NORVI	-	185°(188.9°)	11.0	-	+3000	-	-	-	RNAV 1
TF	MS850	-	169°(173.4°)	2.0	-	+2500	-	-	-	RNAV 1

STAR instruction: RASMU – GAMVI – MS549 (FL70 or above) – MS548 (5000 ft or above) – NORVI (3000 ft or above) – MS850 (2500 ft or above)

ROE 1S

Path Term	Waypoint Identifier	Fly-over	Course °M(°T)	Dist (NM)	Turn Dir	Rest Alts (ft AMSL)	Speed Limits (kt)	VPA/ RDH (°/ft)	Rec Navaid	Navigation Specification
IF	ROE	-	-	-	-	-	-	-	-	RNAV 1
TF	MS540	-	310°(314.2°)	45.7	-	+5000	-	-	-	RNAV 1
TF	MS546	-	309°(313.4°)	14.0	-	+3000	-230	-	-	RNAV 1
TF	MS545	-	279°(283.3°)	4.0	-	-	-	-	-	RNAV 1
TF	MS850	-	199°(203.3°)	3.5	-	+2500	-200	-	-	RNAV 1

STAR instruction: ROE – MS540 (5000 ft or above) – MS546 (max IAS 230 kt, 3000 ft or above) – MS545 – MS850 (max IAS 200 kt, 2500 ft or above)