


ARP 553254N 0132112E

AD ELEV 237 FEET

LEGEND See GEN 2.3

Dimensions in m, ELEV in ft

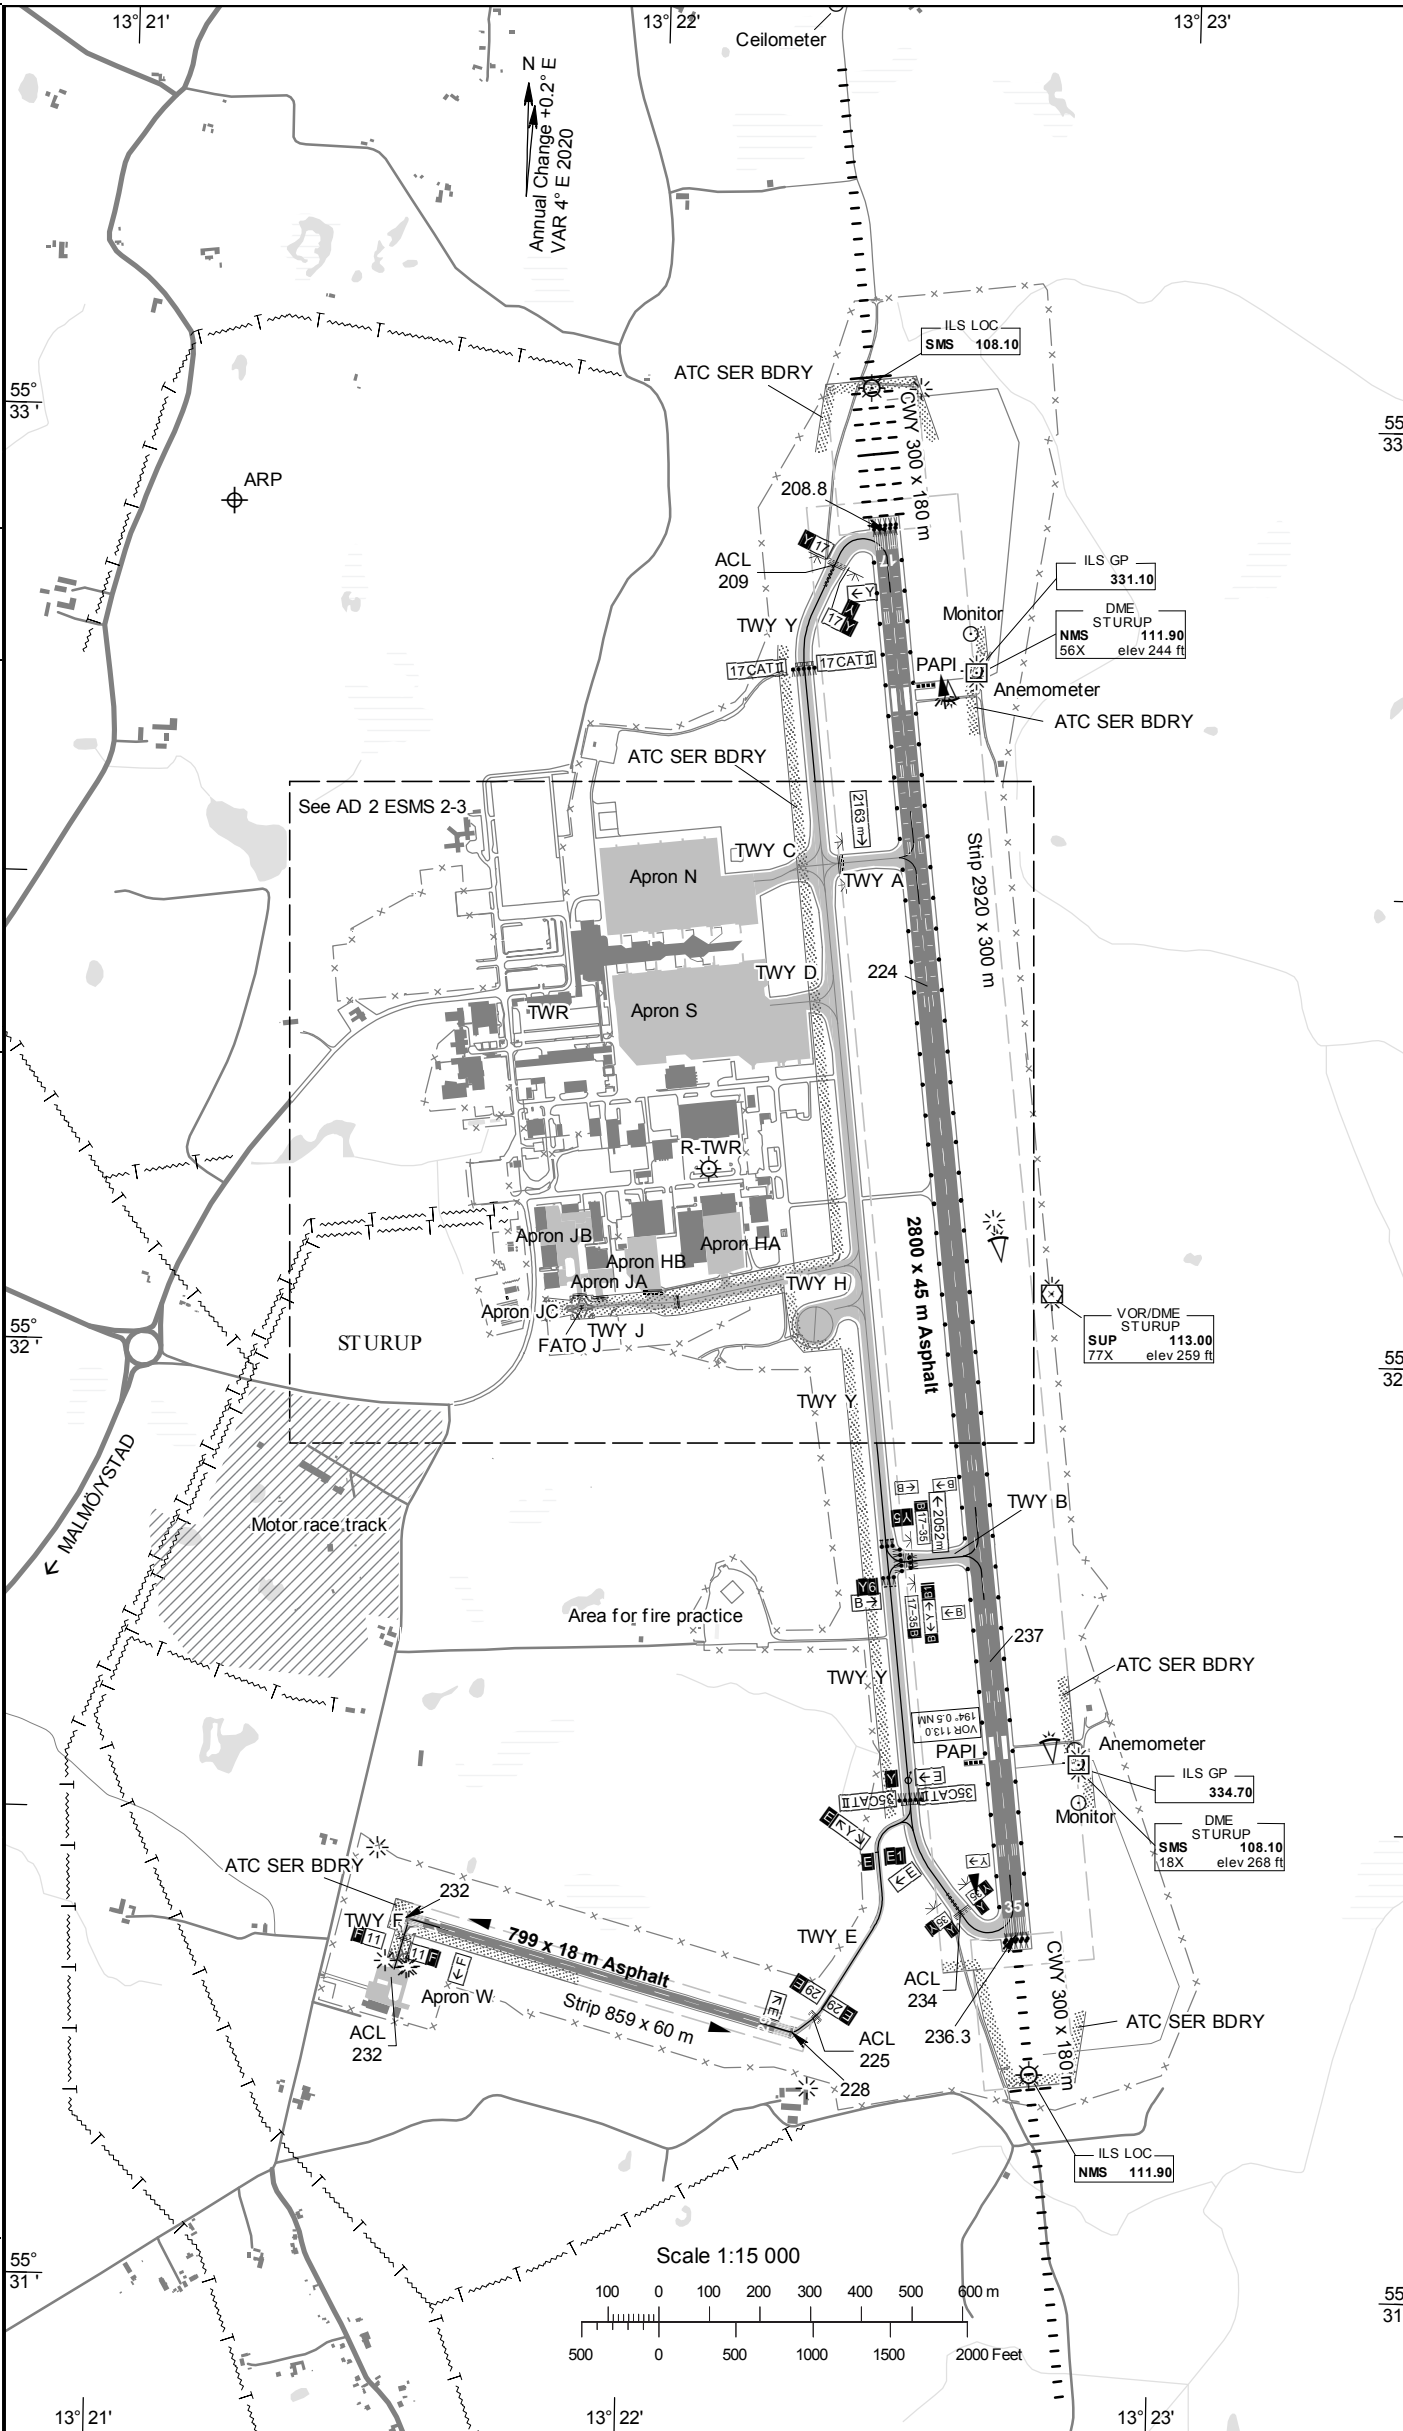

TWY NR	WIDTH	Surface Bearing strength	Day marking		Taxiway lighting	
			Centerline Holding	Edge Centerline	RGL Stopbar	RGL STOPBAR
A	23 m	ASPH PCN 70 F/B/X/T	CL HLDG ITHP	CL		RGL STOPBAR
B	23 m	ASPH PCN 80 F/B/X/T	CL HLDG ITHP	CL		RGL STOPBAR
C	23 m	ASPH PCN 80 F/B/X/T	CL ITHP	CL		
D	23 m	ASPH PCN 80 F/B/X/T	CL ITHP	CL		
E	10 m	ASPH PCN 11 F/B/X/T	CL HLDG			
F	9 m	ASPH PCN 10 F/B/X/T	CL HLDG			
H	23 m	ASPH PCN 40 F/B/X/T	CL ITHP	EDGE		
J	11 m	ASPH PCN 15 F/B/X/T	CL	EDGE		
Y	23 m	ASPH PCN 70 F/B/X/T	CL HLDG ITHP	CL		RGL STOPBAR

ACL/INS Coordinates for Aircraft Stands			
APRON Surface Bearing strength	NR	COORD	ELEV
W ASPH PCN 15			

For Apron N, S, HA, HB, JA, JB, JC and Compass Base see AD 2 ESMS 2-3

RWY NR	TRUE & MAG BRG	THR PSN Geoid undulation	Bearing Strength	THR ELEV and highest ELEV of TDZ of precision APCH RWY	Declared distances				Approach and runway lighting					
					TORA	TODA	ASDA	LDA	APCH	THR TRID TDZ	VASIS (MEHT)	RWY CL	Edge	End
17	173.35° GEO 169° MAG	553253.00N 0132225.59E GUND 116.6 ft	PCN 80 F/B/X/T	THR 208.8 ft TDZ 224 ft	2800	3100	2800	2800	Barrette CL Cat II 900 m LIH	THR Green TDZ White 900 m	PAPI Left/3.00° (59.0 ft)	2800/30 m 0-1900 m white 1900-2500 m white/red 2500-2800 m red LIH	2800/60 m White Caution zone 600 m yellow LIH	Red
35	353.35° GEO 349° MAG	553123.07N 0132244.09E GUND 116.4 ft	PCN 80 F/B/X/T	THR 236.3 ft TDZ 237 ft	2800	3100	2800	2800	Barrette CL Cat I 900 m LIH	THR Green	PAPI Left/3.00° (60.4 ft)	2800/30 m 0-1900 m white 1900-2500 m white/red 2500-2800 m red LIH	2800/60 m White Caution zone 600 m yellow LIH	Red
11	105.31° GEO 101° MAG	553123.34N 0132135.14E GUND 116 ft	PCN 10 F/B/X/T	THR 232 ft	799	799	799	799						
29	285.32° GEO 281° MAG	553116.51N 0132219.11E GUND 116 ft	PCN 10 F/B/X/T	THR 228 ft	799	799	799	799						