


STANDARD INSTRUMENT
DEPARTURE CHART (SID) -
ICAO

HGT and ALT in ft
BRG are MAG
TA 5000 ft AMSL

KALLAX TOWER	128.200
KALLAX APPROACH	125.450

RNAV (GNSS) SID RWY 14

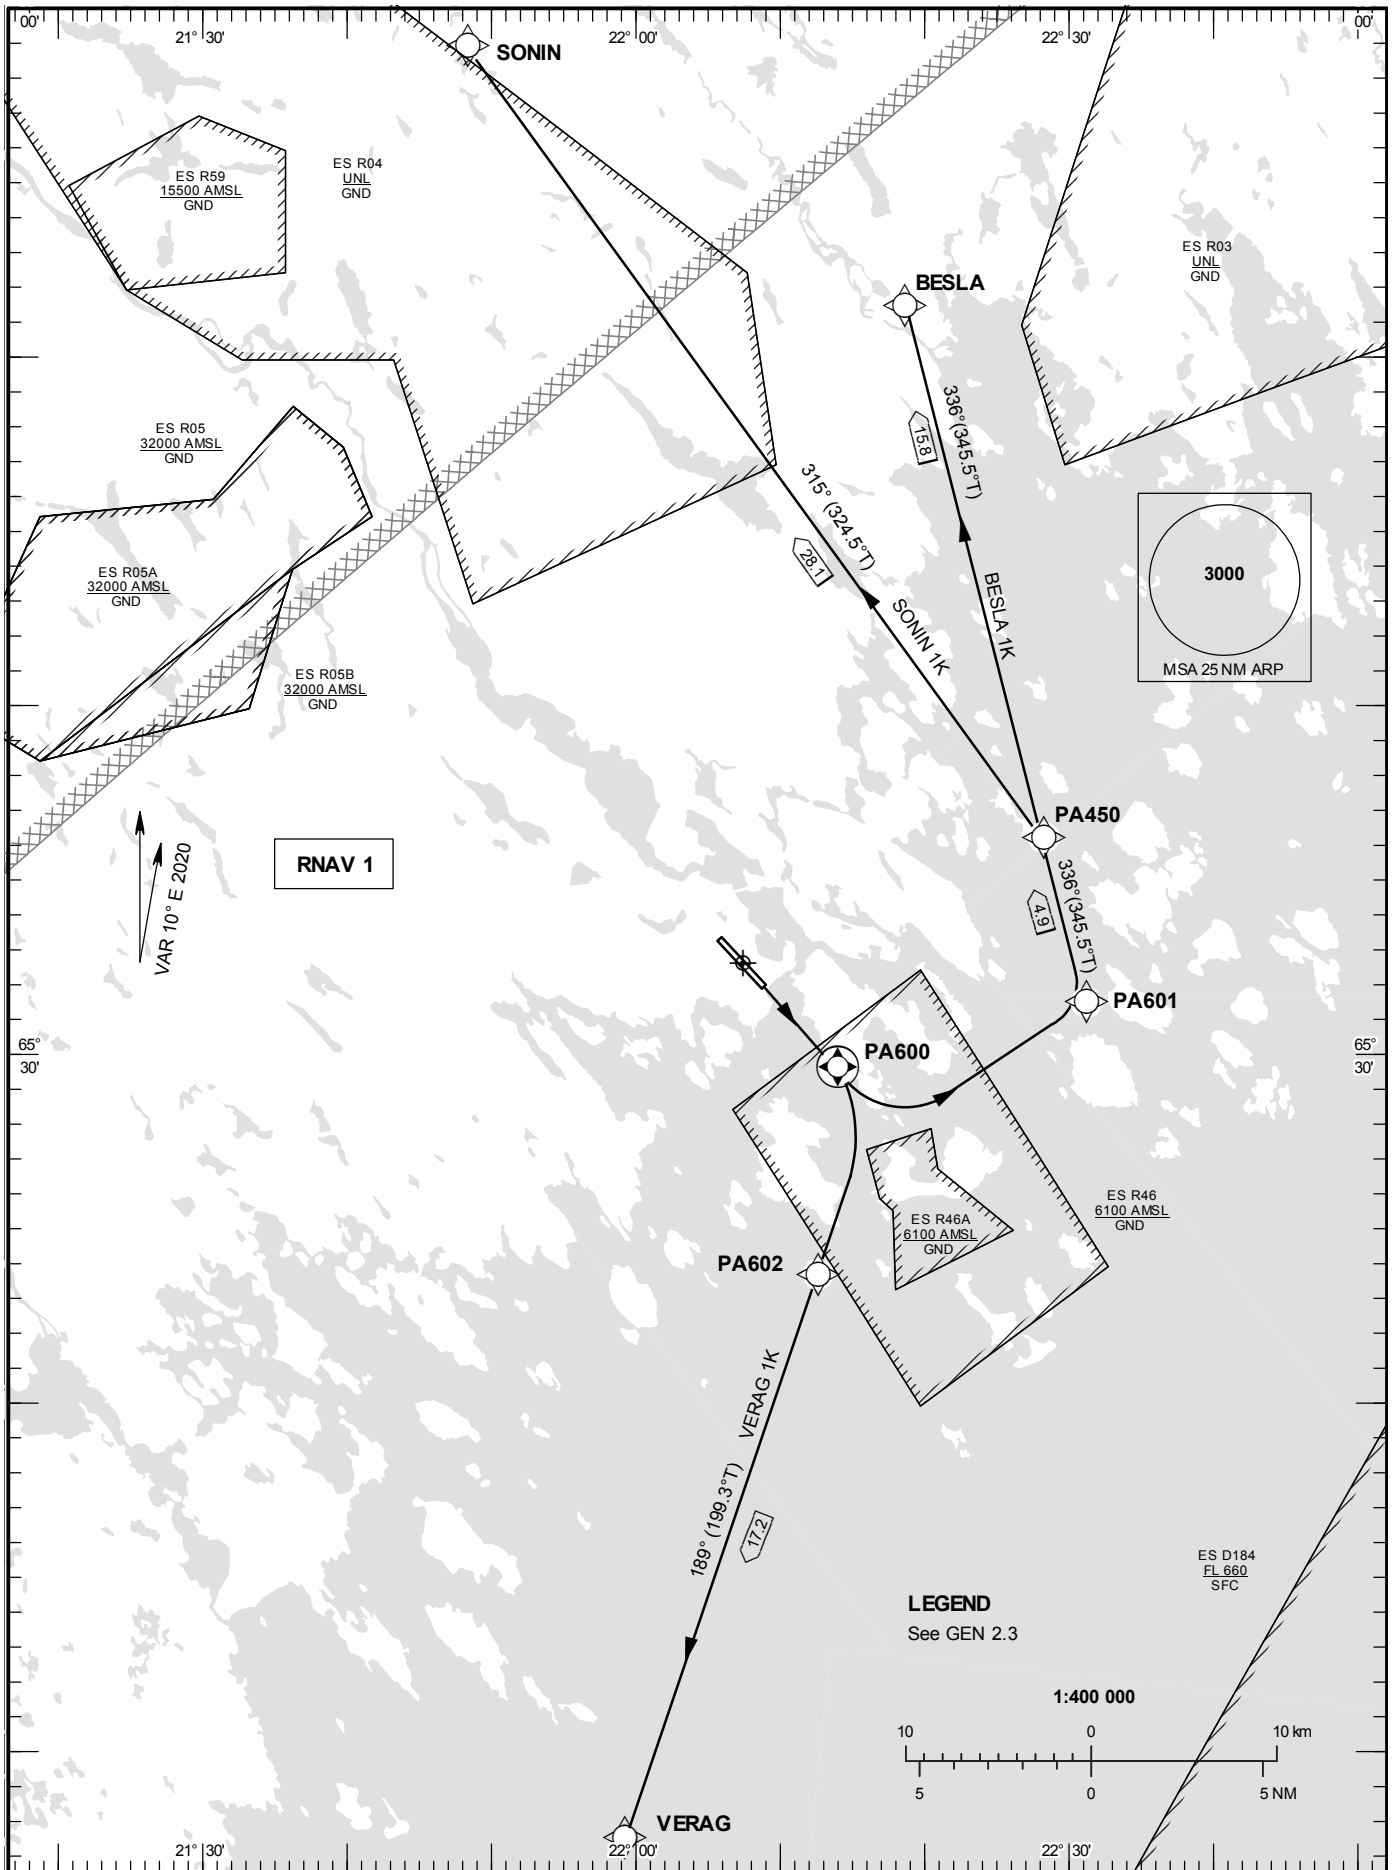

Prescribed Coding of RNAV SID for RWY 14

RNAV 1 for positioning update.

Operators unable to fly RNAV 1 shall inform ATC "UNABLE RNAV SID". Radar vectors will then be provided.

For ATC reasons, aircraft proceeding on SID shall use 6.6% (400 ft/NM) as minimum climb gradient. Aircraft unable to meet with this procedure shall inform ATC.

BESLA 1K

Path Term	Waypoint Identifier	Fly-over	Course °M(°T)	Dist (NM)	Turn Dir	Rest Alts (ft AMSL)	Speed Limits (kt)	VPA/RDH (°/ft)	Rec Navaid	Navigation Specification
DF	PA600	Y	-	-	-	-	-	-	-	RNAV 1
DF	PA601	-	-	-	L	-	-230	-	-	RNAV 1
TF	PA450	-	336°(345.5°)	4.9	-	-	-	-	-	RNAV 1
TF	BESLA	-	336°(345.5°)	15.8	-	-	-	-	-	RNAV 1

SID instruction: PA600 – PA601(max IAS 230kt until PA601) – PA450 – BESLA

SONIN 1K

Path Term	Waypoint Identifier	Fly-over	Course °M(°T)	Dist (NM)	Turn Dir	Rest Alts (ft AMSL)	Speed Limits (kt)	VPA/RDH (°/ft)	Rec Navaid	Navigation Specification
DF	PA600	Y	-	-	-	-	-	-	-	RNAV 1
DF	PA601	-	-	-	L	-	-230	-	-	RNAV 1
TF	PA450	-	336°(345.5°)	4.9	-	-	-	-	-	RNAV 1
TF	SONIN	-	315°(324.5°)	28.1	-	-	-	-	-	RNAV 1

SID instruction: PA600 – PA601(max IAS 230kt until PA601) – PA450 – SONIN

VERAG 1K

Path Term	Waypoint Identifier	Fly-over	Course °M(°T)	Dist (NM)	Turn Dir	Rest Alts (ft AMSL)	Speed Limits (kt)	VPA/RDH (°/ft)	Rec Navaid	Navigation Specification
DF	PA600	Y	-	-	-	-	-	-	-	RNAV 1
DF	PA602	-	-	-	R	-	-	-	-	RNAV 1
TF	VERAG	-	189°(199.3°)	17.2	-	-	-	-	-	RNAV 1

SID instruction: PA600 – PA602 – VERAG