


STANDARD INSTRUMENT
ARRIVAL CHART (STAR) -
ICAO

HGT and ALT in ft
BRG are MAG (True)
TA 5000 ft AMSL

BORLÄNGE TOWER 127.305

RNAV RWY 14

XOTBU 1E

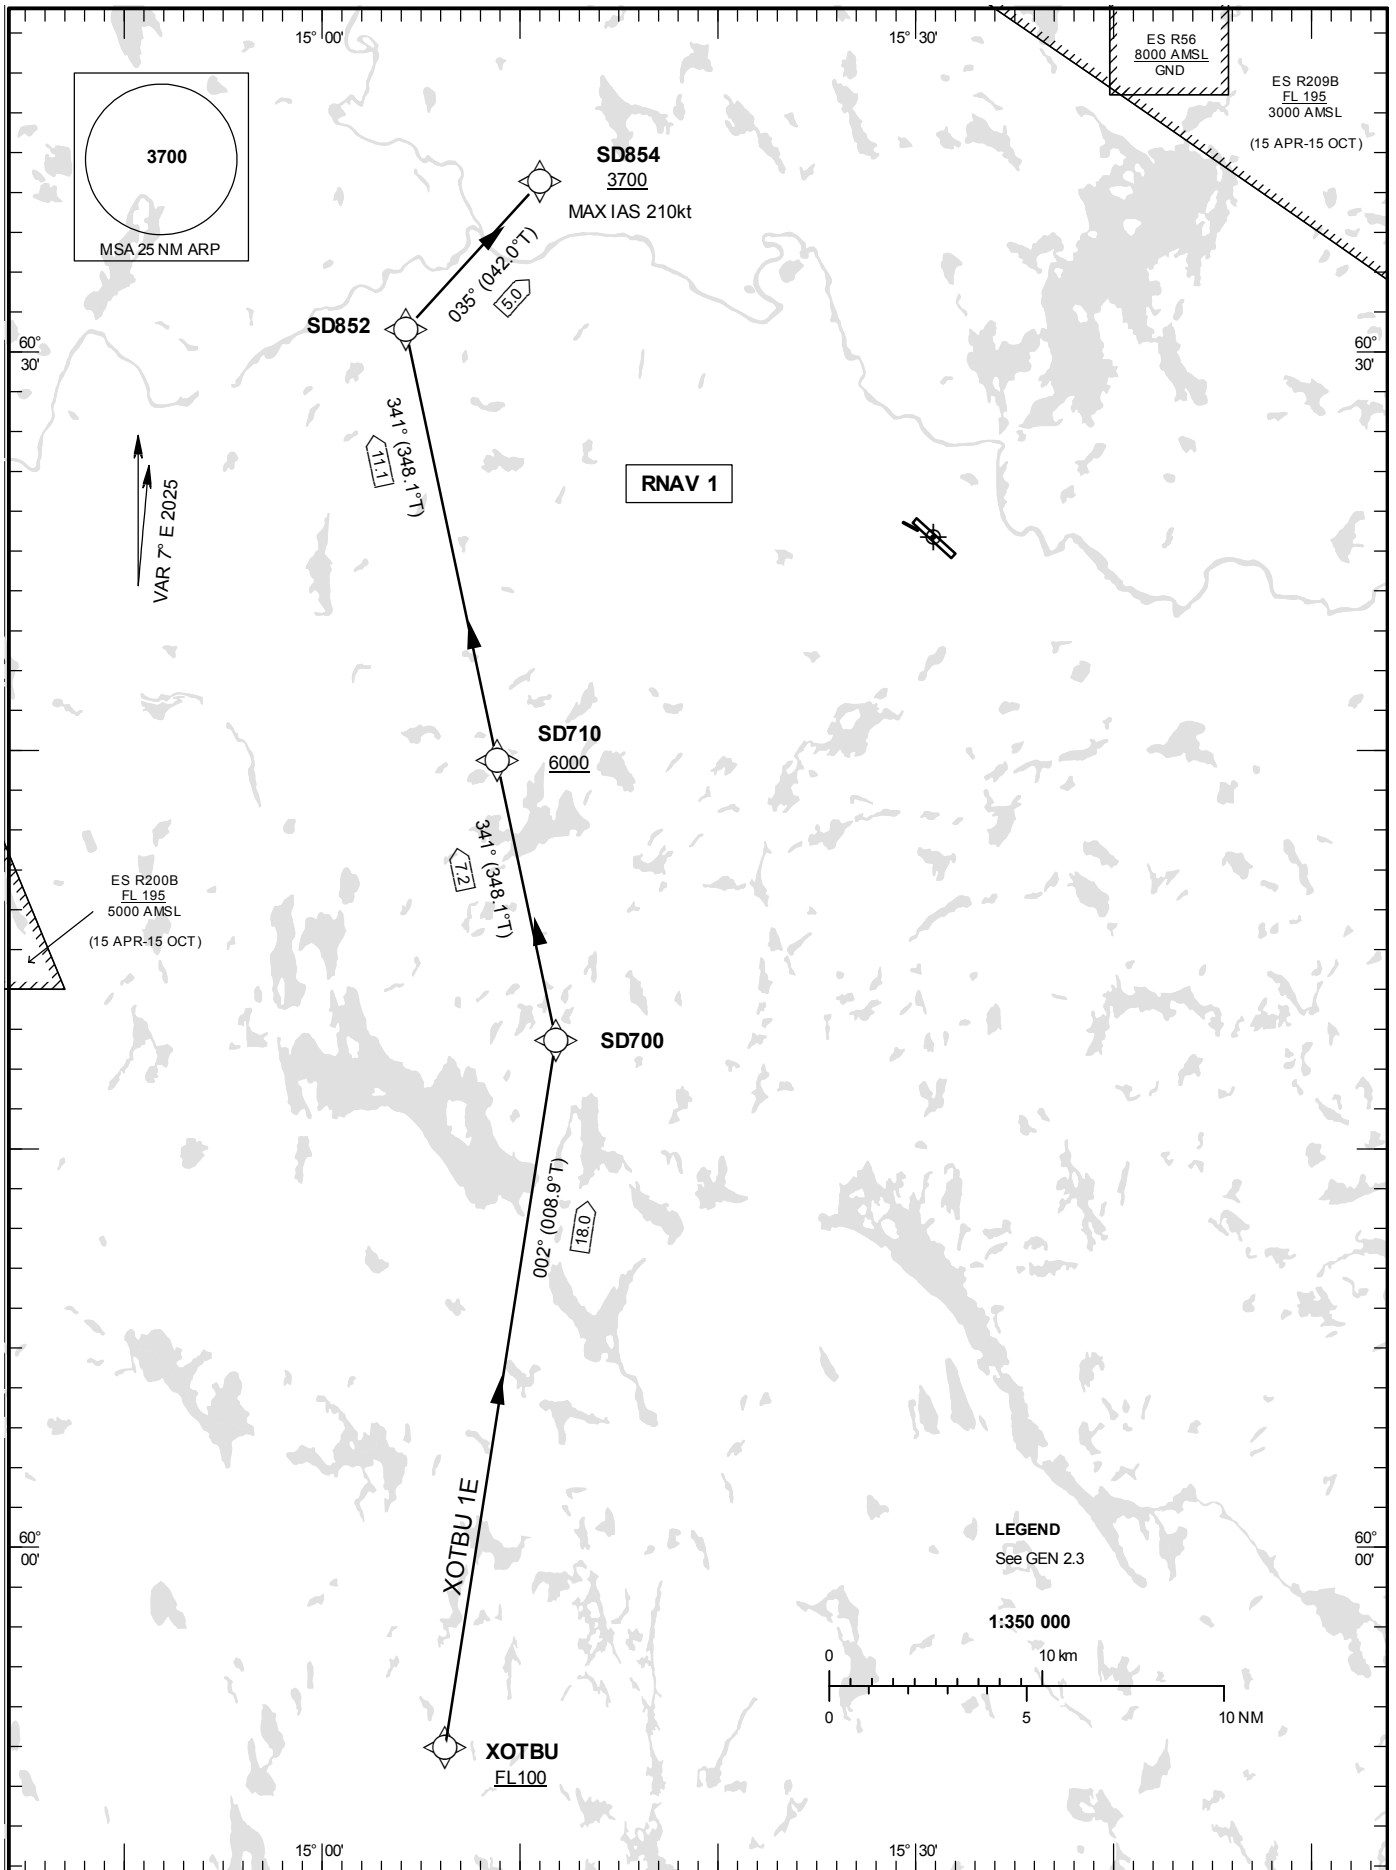

Prescribed Coding of RNAV STAR for RWY 14

XOTBU 1E

Path Term	Waypoint Identifier	Fly-over	Course °M(°T)	Dist (NM)	Turn Dir	Rest Alts (ft AMSL)	Speed Limits (kt)	VPA/RDH (°/ft)	Rec Navaid	Navigation Specification
IF	XOTBU	-	-	-	-	+FL100	-	-	-	RNAV 1
TF	SD700	-	002°(008.9°)	18.0	-	-	-	-	-	RNAV 1
TF	SD710	-	341°(348.1°)	7.2	-	+6000	-	-	-	RNAV 1
TF	SD852	-	341°(348.1°)	11.1	-	-	-	-	-	RNAV 1
TF	SD854	-	035°(042.0°)	5.0	-	+3700	-210	-	-	RNAV 1

STAR instruction: XOTBU – SD700 – SD710 (6000 ft or above) – SD852 – SD854 (max IAS 210 kt, 3700 ft or above)