


STANDARD INSTRUMENT
ARRIVAL CHART (STAR) -
ICAO

HGT and ALT in ft
BRG are MAG (True)
TA 5000 ft AMSL

JÖNKÖPING TOWER 118.255

RNAV (GNSS) RWY 01
DEVNI 4K, NEGAS 4K.

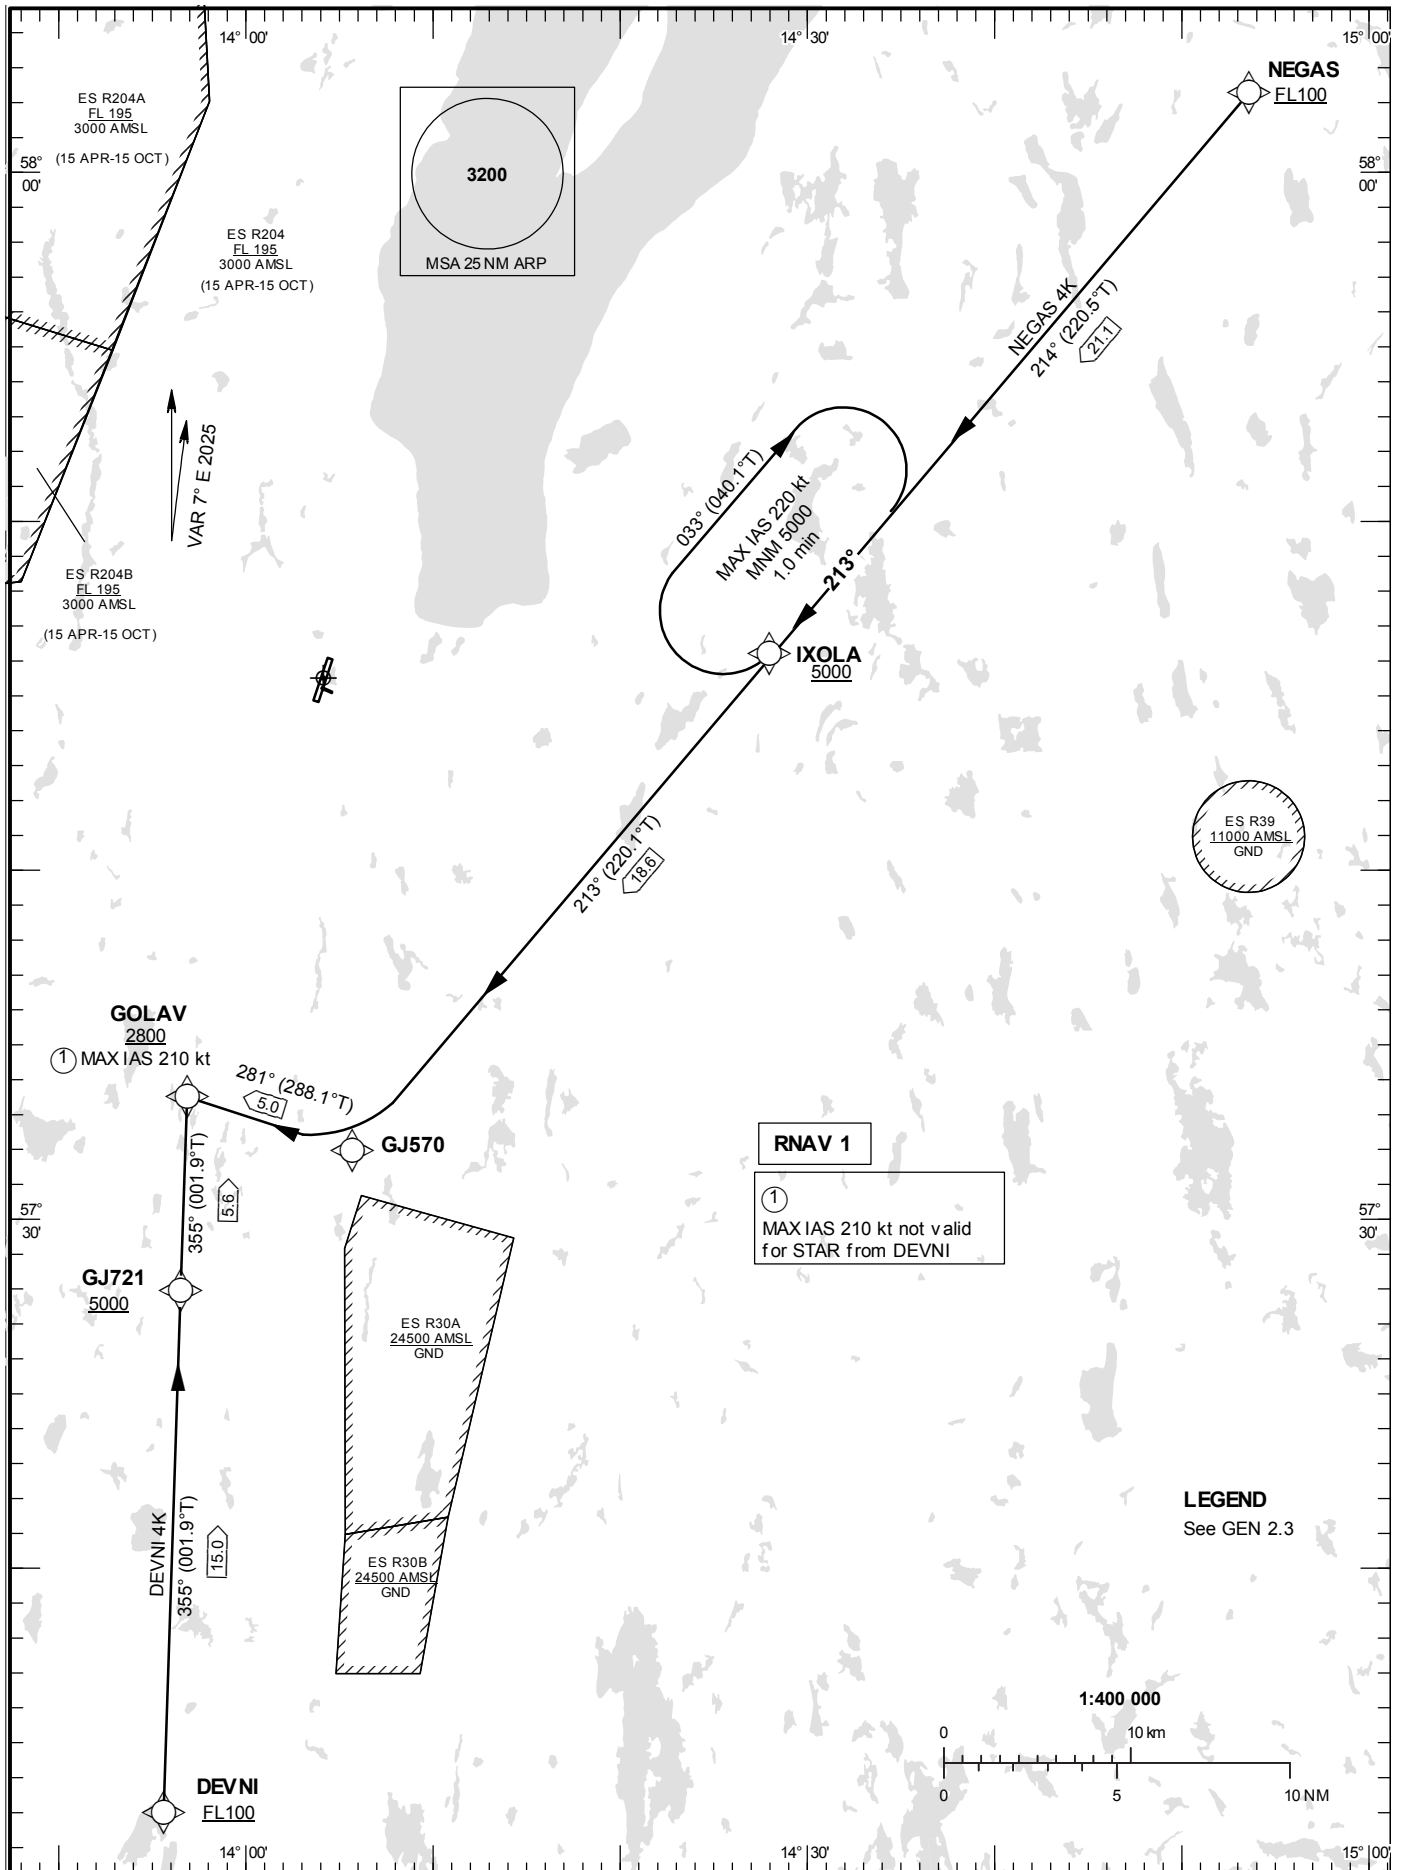

Prescribed Coding of RNAV STAR for RWY 01

DEVNI 4K

Path Term	Waypoint Identifier	Fly-over	Course °M(°T)	Dist (NM)	Turn Dir	Rest Alts (ft AMSL)	Speed Limits (kt)	VPA/RDH (°/ft)	Rec Navaid	Navigation Specification
IF	DEVNI	-	-	-	-	+FL100	-	-	-	RNAV 1
TF	GJ721	-	355°(001.9°)	15.0	-	+5000	-	-	-	RNAV 1
TF	GOLAV	-	355°(001.9°)	5.6	-	+2800	-	-	-	RNAV 1

STAR instruction: DEVNI (FL100 or above) – GJ721 (5000 ft or above) – GOLAV (2800 ft or above)

NEGAS 4K

Path Term	Waypoint Identifier	Fly-over	Course °M(°T)	Dist (NM)	Turn Dir	Rest Alts (ft AMSL)	Speed Limits (kt)	VPA/RDH (°/ft)	Rec Navaid	Navigation Specification
IF	NEGAS	-	-	-	-	+FL100	-	-	-	RNAV 1
TF	IXOLA	-	214°(220.5°)	21.1	-	+5000	-	-	-	RNAV 1
TF	GJ570	-	213°(220.1°)	18.6	-	-	-	-	-	RNAV 1
TF	GOLAV	-	281°(288.1°)	5.0	-	+2800	-210	-	-	RNAV 1

STAR instruction: NEGAS (FL100 or above) – IXOLA (5000 ft or above) – GJ570 – GOLAV (2800 ft or above, MAX IAS 210 kt)