


INSTRUMENT APPROACH CHART – ICAO

THR ELEV 478.3 ft, AD ELEV 507 ft
 OCH are related to THR.
 Circling OCH are related to AD ELEV.
 BRG are MAG
 ALT, HGT and ELEV in ft.


LANDVETTER TOWER	118.605
LANDVETTER ATIS	118.380
GÖTEBORG APPROACH	124.680

ILS or LOC RWY 03

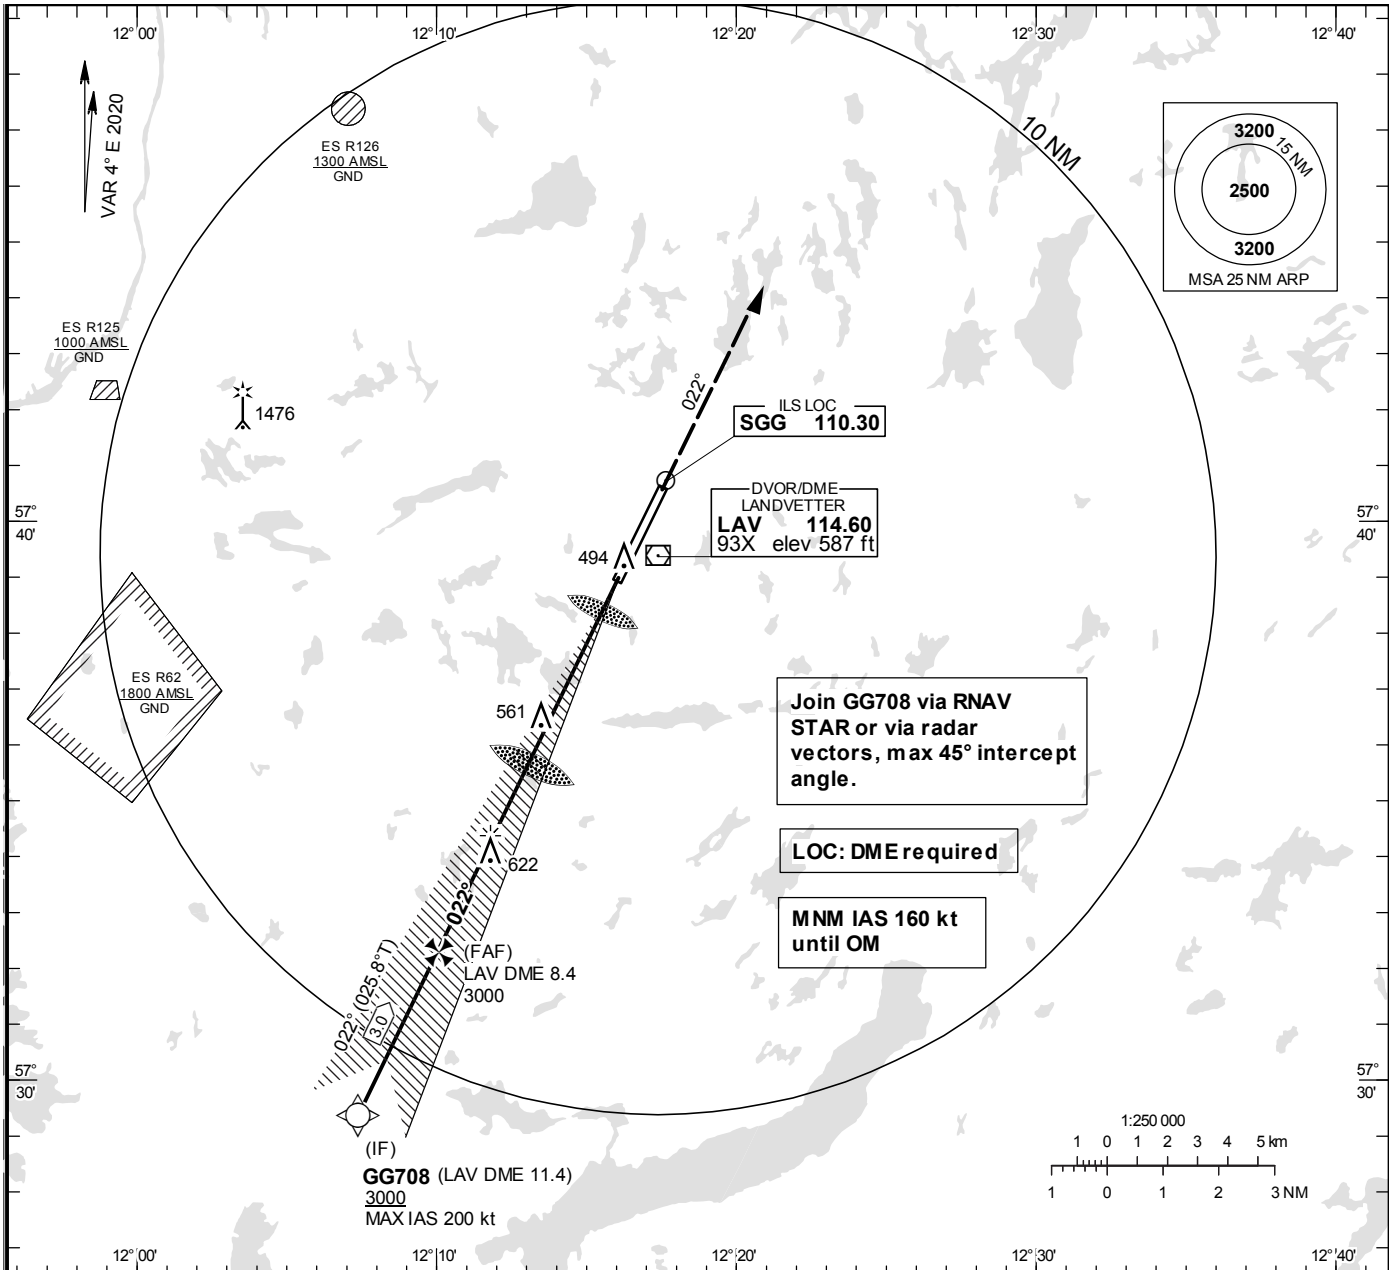

TA 5000 ft AMSL **RDH 55.5 ft** *Timing not authorized for defining the MAPt

Special COM Failure procedures see ESGG AD 2.22

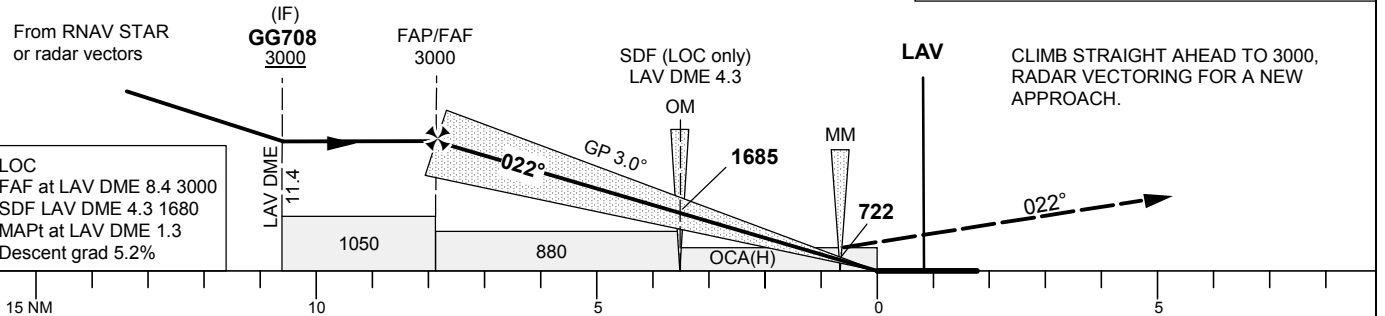

		OCA (H)					Final approach		LOC Distance FAF-MAPt 7.2 NM*						
Cat of ACFT		A	B	C	D	D _L	DME LAV	NM	8	7	6	5	4	3	2
Straight-in Approach	CAT I	620(142)	629(151)	640(162)	650(172)	652(174)	ALT	ft	2862	2543	2224	1905	1584	1263	939
	CAT II	529(51)	540(62)	553(75)	565(87)	568(90)	GS	kt	80	100	120	140	160	180	
	LOC	820(350)					Time	min:s	5:24	4:19	3:36	3:05	2:42	2:24	
CAT III B Approved							Rate of descent	ft/min	425	530	635	745	850	955	