


INSTRUMENT APPROACH CHART – ICAO

THR ELEV 506.4 ft, AD ELEV 507 ft
 OCH are related to THR.
 Circling OCH are related to AD ELEV.
 BRG are MAG
 ALT, HGT and ELEV in ft.


LANDVETTER TOWER	118.605
LANDVETTER ATIS	118.380
GÖTEBORG APPROACH	124.680

ILS or LOC RWY 21

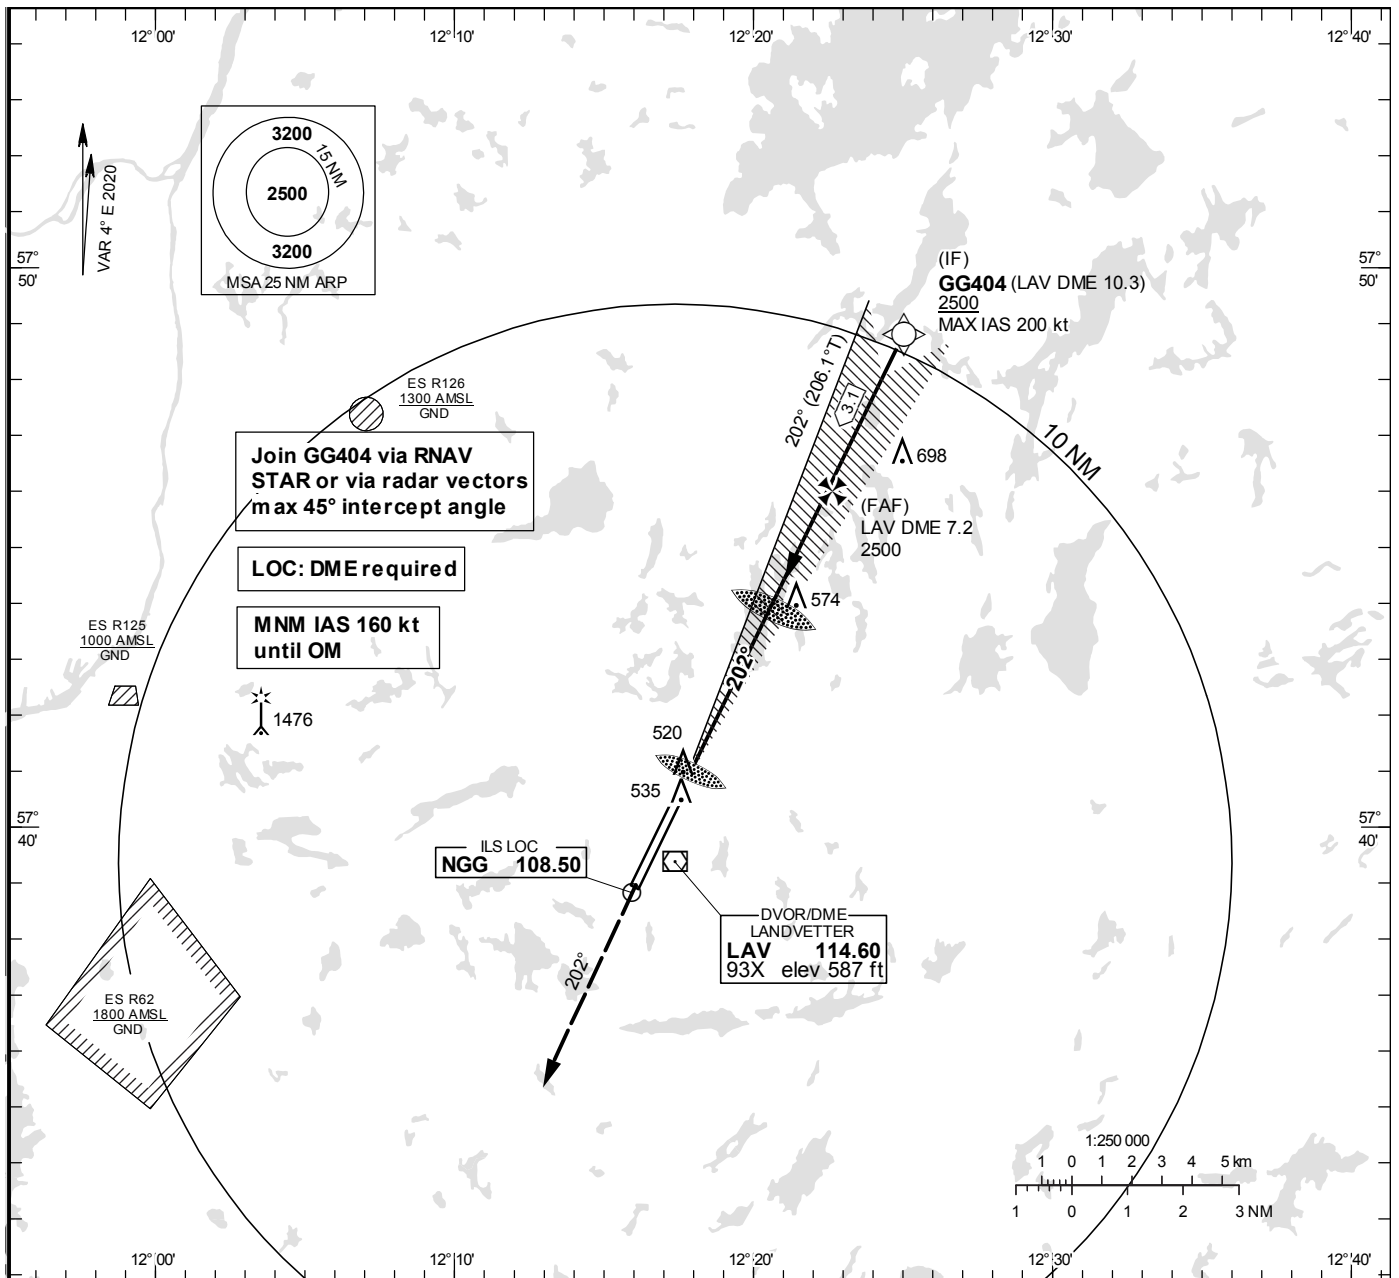

TA 5000 ft AMSL RDH 49.9 ft *Timing not authorized for defining the MAPt

Special COM Failure procedures see ESGG AD 2.22

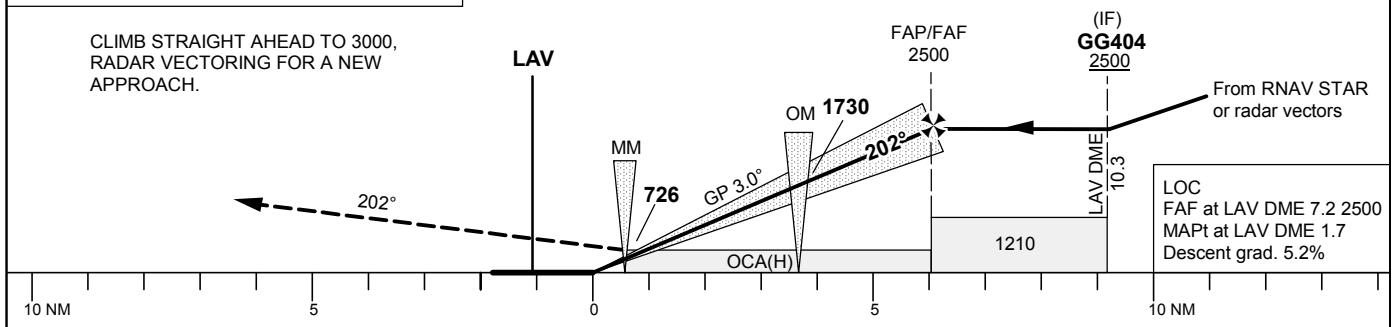

Cat of ACFT	OCA (H)					Final approach		LOC Distance FAF-MAPt 5.6 NM*						
	A	B	C	D	D _L	DME LAV	NM	7	6	5	4	3	2	
Straight-in Approach	CAT I	657(151)	665(159)	676(170)	685(179)	687(181)	ALT	ft	2426	2107	1787	1467	1146	821
	CAT II	563(57)	573(67)	586(80)	600(94)	603(97)	GS	kt	80	100	120	140	160	180
	LOC	830(330)					Time	min:s	4:11	3:21	2:47	2:23	2:06	1:52
	CAT III B Approved					Rate of descent	ft/min	425	530	635	745	850	955	