





ARP 591341N 0150224E
 AD ELEV 192 FEET
 LEGEND See GEN 2.3
 Dimensions in m, ELEV in ft



TWY NR	WIDTH	Surface Bearing strength	Day marking		Taxiway lighting	
			Centerline Holding	Edge Centerline	RGL Stopbar	RGL STOPBAR
A	24 m	ASPH PCN 35 F/B/X/T	CL HLDG	EDGE	RGL STOPBAR	RGL STOPBAR
C	25 m	ASPH PCN 46 F/B/X/T	CL HLDG	EDGE	RGL STOPBAR	RGL STOPBAR



APRON Surface Bearing strength	NR	COORD	ELEV
ASPH PCN 25 F/B/X/T			
Cargo Apron ASPH PCN 35 F/B/X/T			

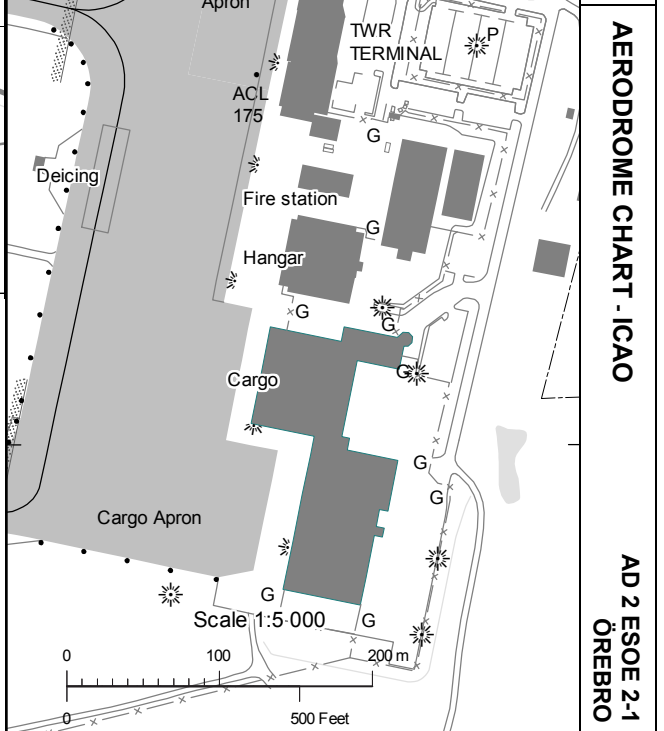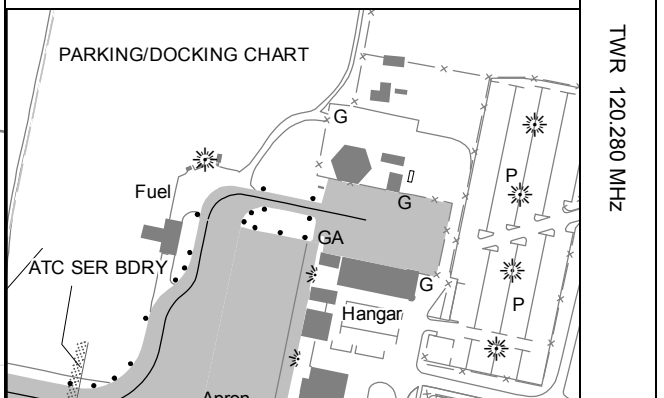

RWY NR	TRUE & MAG BRG	THR PSN Geoid undulation	Bearing Strength	THR ELEV and highest ELEV of TDZ of precision APCH RWY	Declared distances				Approach and runway lighting					
					TORA	TODA	ASDA	LDA	APCH	THR TRID TDZ	VASIS (MEHT)	RWY CL	Edge	End
01	011.67° GEO 008° MAG	591227.17N 0150153.15E GUND 94.2 ft	PCN 45 F/B/X/T	THR 161.3 ft TDZ 161.5 ft	3270	3570	3270	3270	Barrette CL Cat I 900 m LIH	THR Green	PAPI Left/3.00° (50.5 ft)	3270/30 m	3270/60 m White Caution zone 600 m yellow LIH	Red
19	191.67° GEO 188° MAG	591410.69N 0150234.89E GUND 94.0 ft	PCN 45 F/B/X/T	THR 192.3 ft TDZ 192.5 ft	3270	3570	3270	3270	Barrette CL Cat I 900 m LIH	THR Green	PAPI Left/3.00° (50.5 ft)	3270/30 m	3270/60 m White Caution zone 600 m yellow LIH	Red