


ILS RWY 19 Cat C/D/DL

ÖREBRO TOWER 120.280


THR ELEV 192.3 ft, AD ELEV 192 ft  
 OCH are related to THR.  
 Circling OCH are related to AD ELEV.  
 BRG are MAG  
 ALT. HGT and ELEV in ft.

INSTRUMENT  
 APPROACH  
 CHART – ICAO

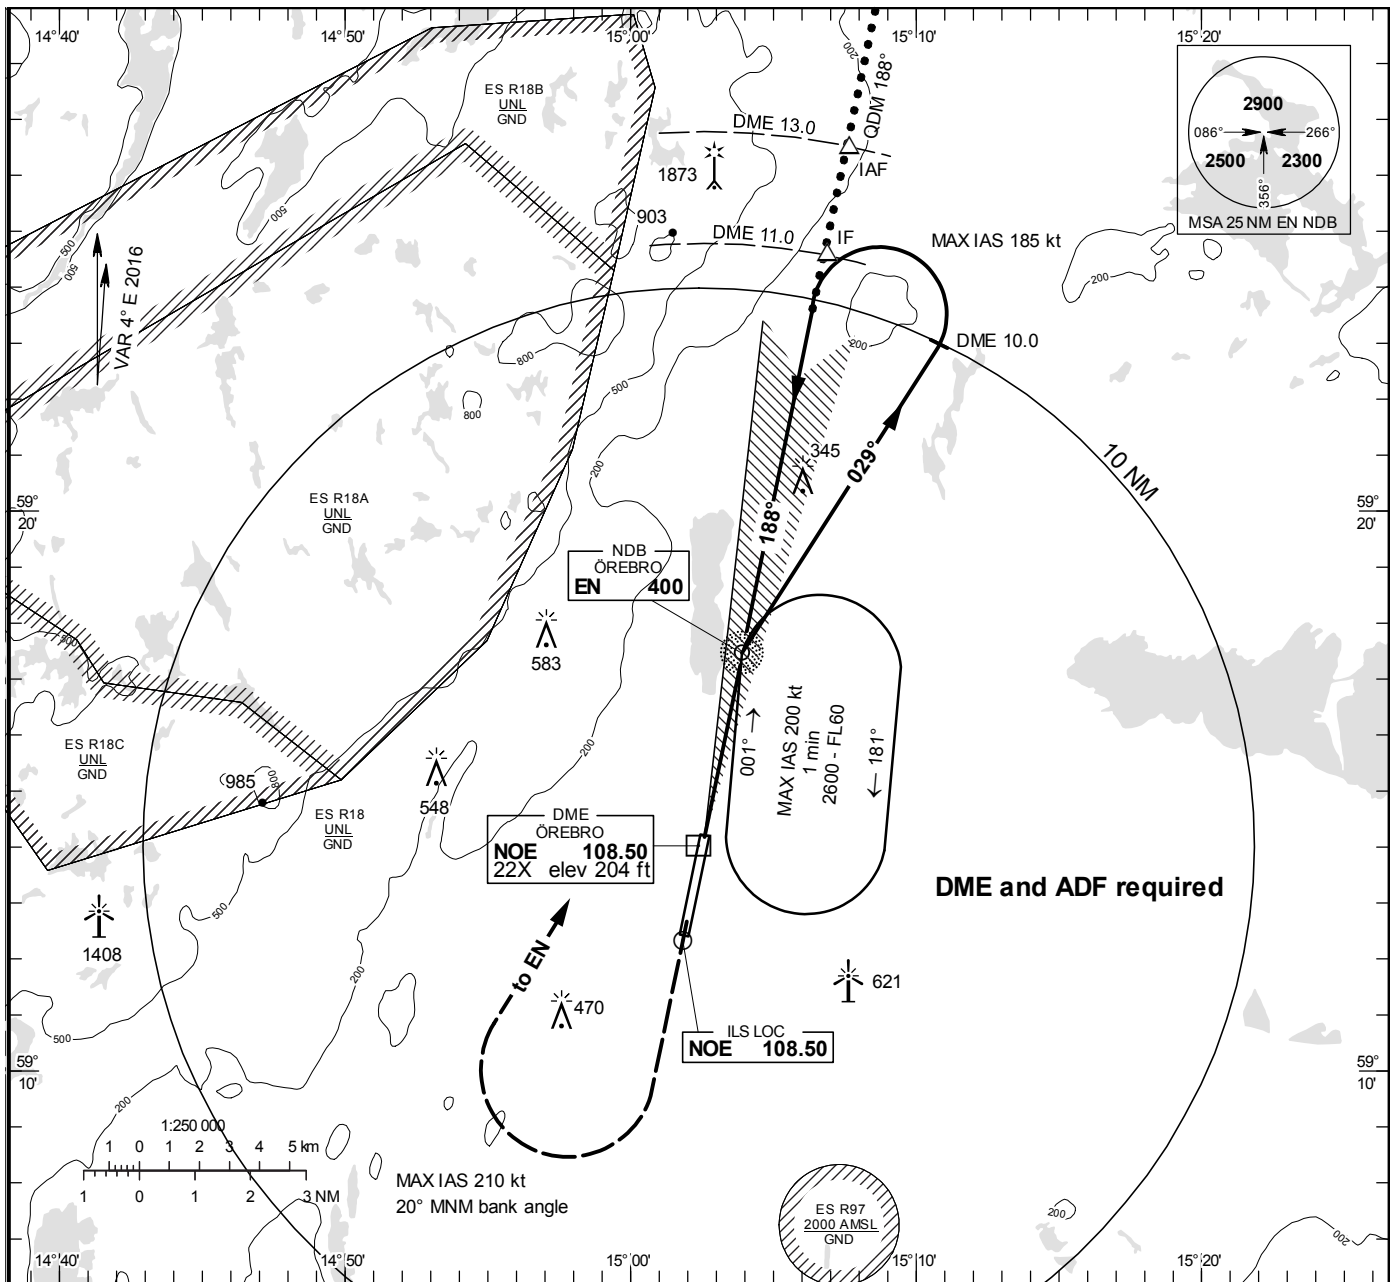

TA 5000 ft AMSL RDH 54.1 ft Circling MAX 195 kt IAS \*Timing not authorized for defining the MAPt

NO TURN BEFORE MAPt MAX SPEED within base turn 185 kt IAS MAX SPEED within missed approach turn 210 kt IAS, MNM bank angle 20°

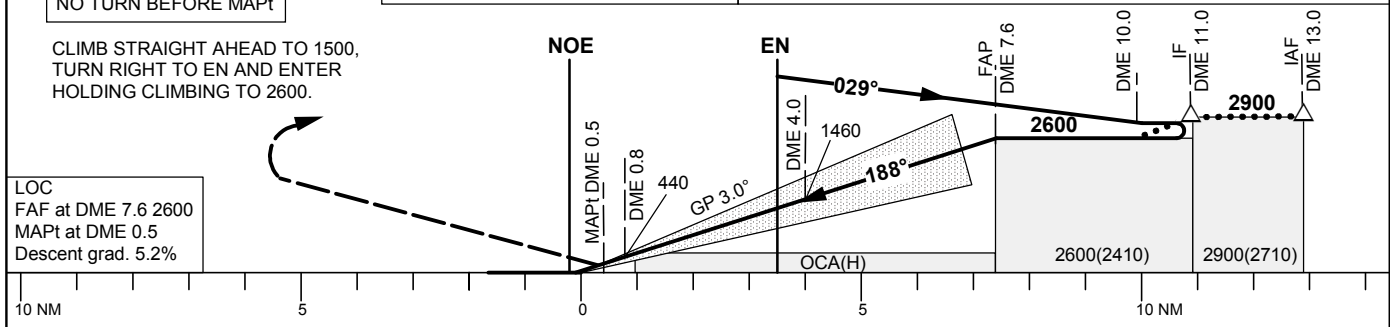

OCA (H)				Final approach	Distance FAF-MAPt 7.1 NM*							
Cat of ACFT	C	D	DL	DME NM	7	6	5	4	3	2	1	
Straight-in Approach	Cat I	365 (173)	375 (183)	375 (183)	ALT	2420	2100	1780	1460	1150	830	510
	LOC	540 (348)		GS	kt	110	120	130	150	160	180	
Circling (MAX 195 kt IAS)	1020 (828)			Rate of descent	ft/min	580	640	690	800	850	960	