


STANDARD INSTRUMENT
ARRIVAL CHART (STAR) -
ICAO

HGT and ALT in ft
BRG are MAG (True)
TA 5000 ft AMSL

BORLÄNGE TOWER 127.305

RNAV (GNSS) STAR RWY 32

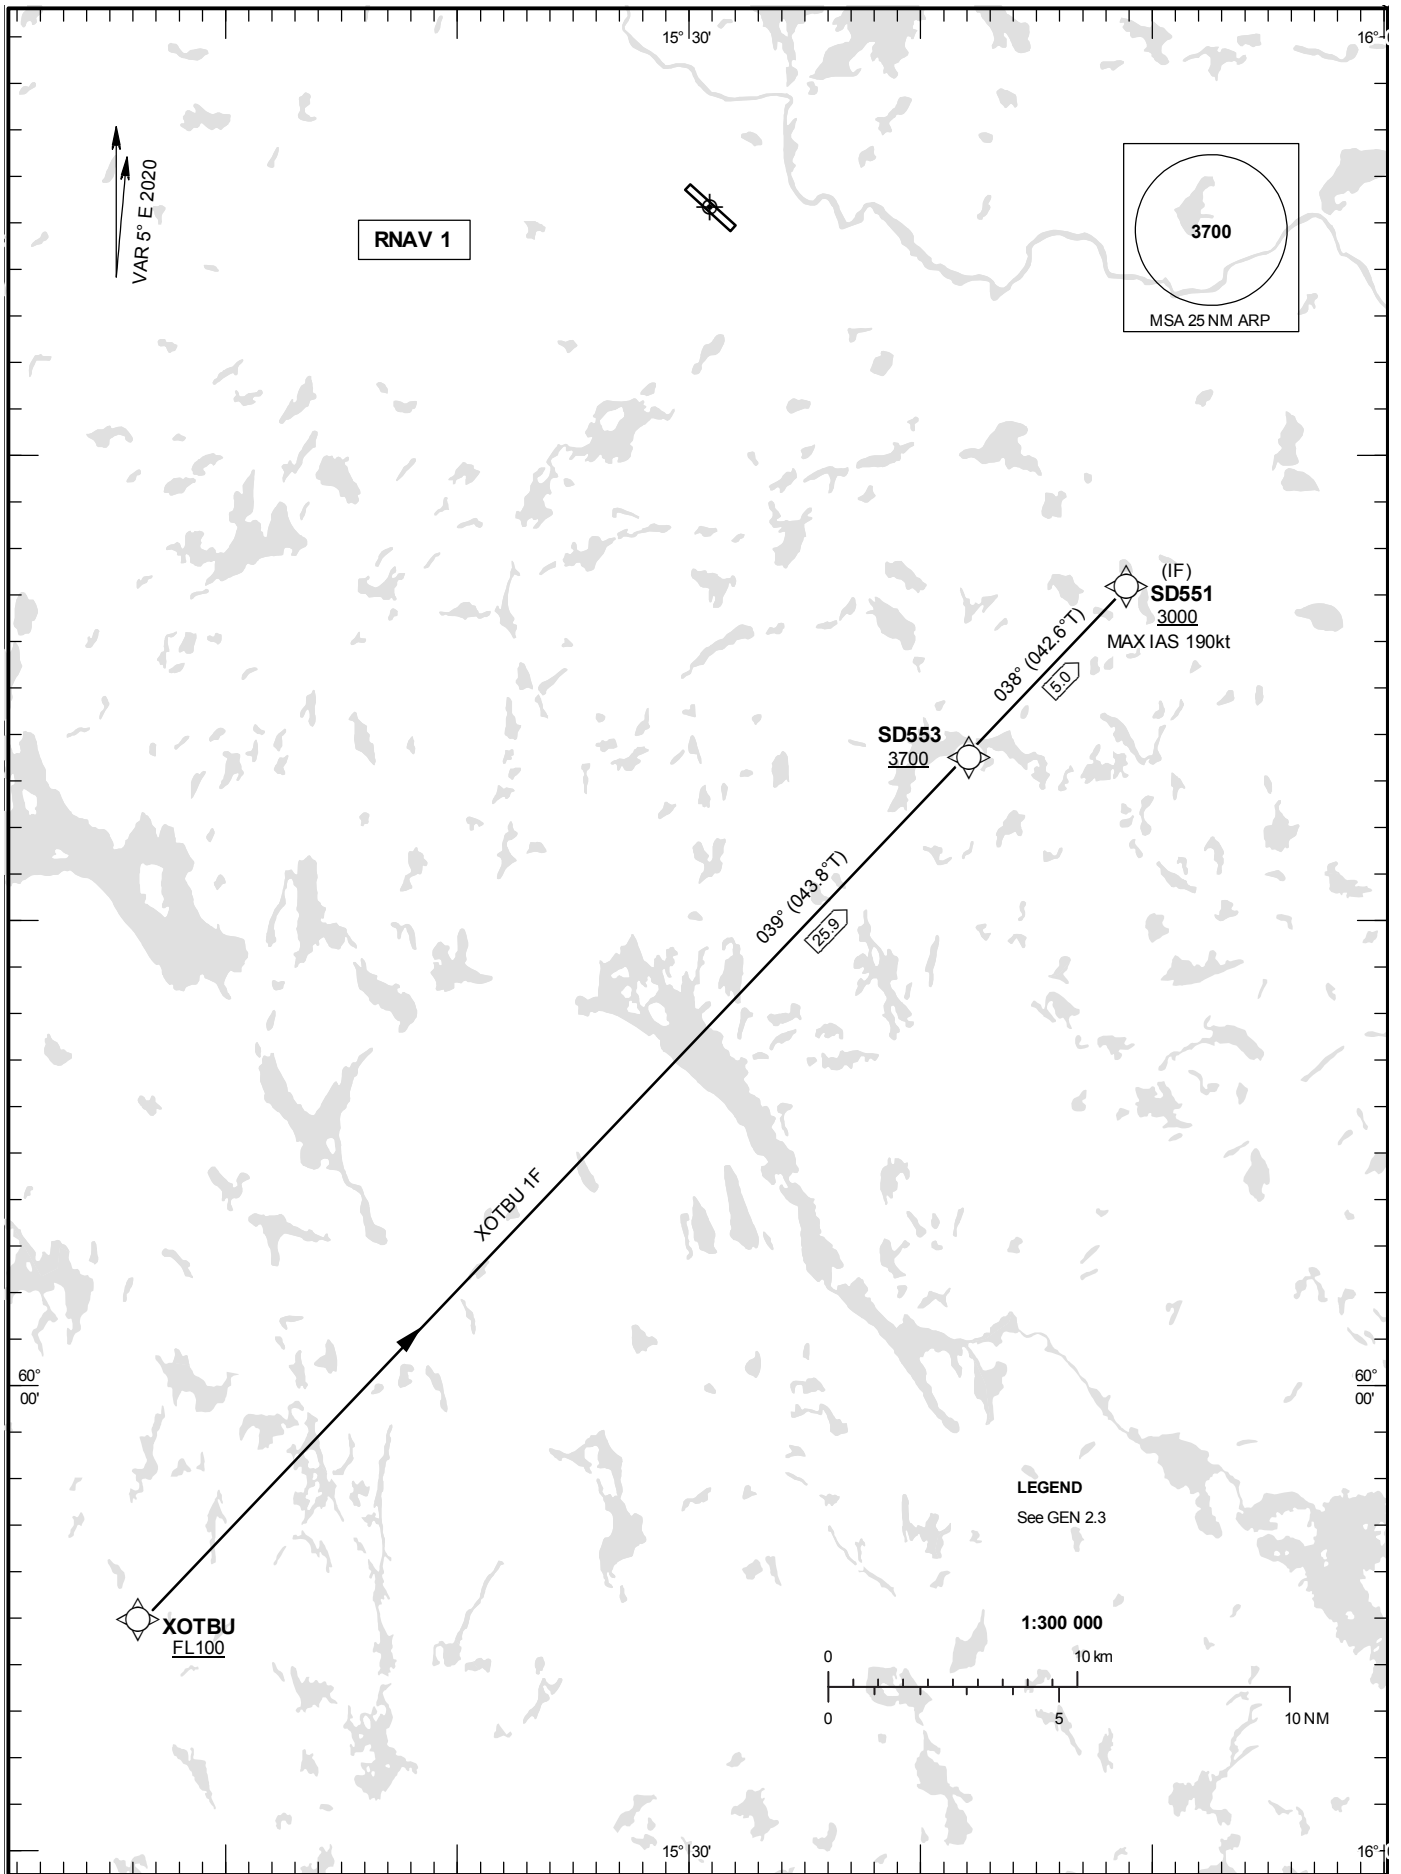

Prescribed Coding of RNAV STAR for RWY 32**XOTBU 1F**

Path Term	Waypoint Identifier	Fly-over	Course °M(°T)	Dist (NM)	Turn Dir	Rest Alts (ft AMSL)	Speed Limits (kt)	VPA/RDH (°/ft)	Rec Navaid	Navigation Specification
IF	XOTBU	-	-	-	-	+FL100	-	-	-	RNAV 1
TF	SD553	-	039°(043.8°)	25.9	-	+3700	-	-	-	RNAV 1
TF	SD551	-	038°(042.6°)	5.0	-	+3000	-190	-	-	RNAV 1

STAR instruction: XOTBU (FL100 or above) – SD553 (3700 ft or above) – SD551 (max IAS 190 kt, 3000 ft or above)