


STANDARD INSTRUMENT  
DEPARTURE CHART (SID) -  
ICAO


HGT and ALT in ft  
BRG are MAG (True)  
TA 5000 ft AMSL

HALMSTAD TOWER	130.105
	135.055

RNAV (GNSS) SID RWY 19

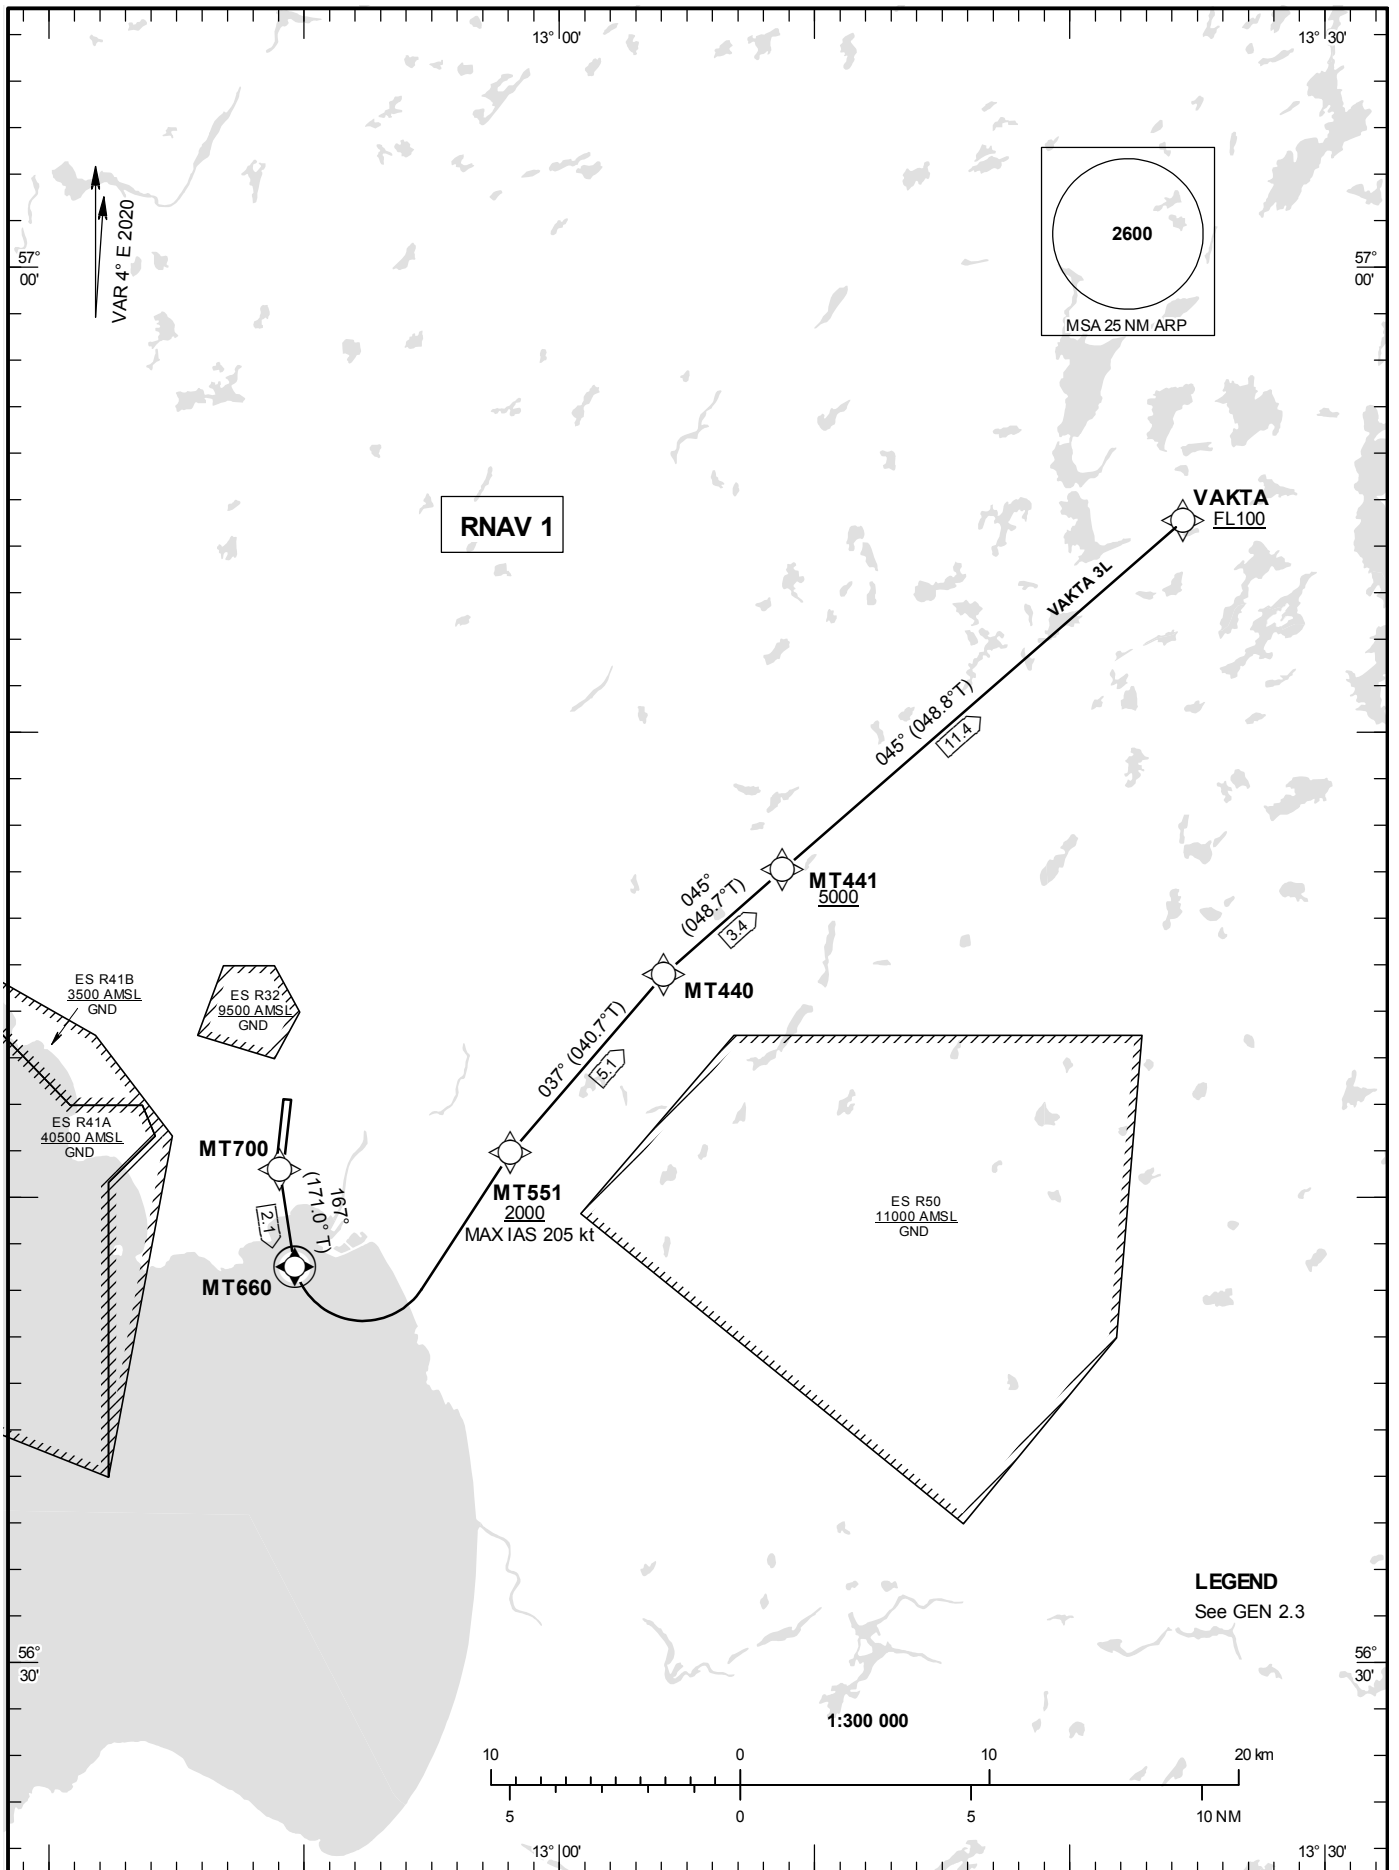

LEGEND  
See GEN 2.3



**Prescribed Coding of RNAV SID for RWY 19****VAKTA 3L**

Path Desc	Waypoint Identifier	Fly-over	Course °M(°T)	Dist (NM)	Turn Dir	Altitude	Speed	VPA/RDH	Rec Navaid	Navigation Specification
DF	MT700	-	-	-	-	-	-	-	-	RNAV 1
TF	MT660	Y	167°(171.0°)	2.1	-	-	-	-	-	RNAV 1
DF	MT551	-	-	-	L	+2000	-205	-	-	RNAV 1
TF	MT440	-	037°(040.7°)	5.1	-	-	-	-	-	RNAV 1
TF	MT441	-	045°(048.7°)	3.4	-	+5000	-	-	-	RNAV 1
TF	VAKTA	-	045°(048.8°)	11.4	-	+FL100	-	-	-	RNAV 1

SID instruction: MT700 – MT660 (min PDG 3.8 % (240 ft/NM) until MT660) – MT 551 (max IAS 205 until MT551, min 2000 ft) – MT440 – MT441 (min 5000 ft) – VAKTA (min FL 100)