


STANDARD INSTRUMENT
DEPARTURE CHART (SID) -
ICAO

HGT and ALT in ft
BRG are MAG (True)
TA 5000 ft AMSL

SKAVSTA TOWER	127.705
ÖSTGÖTA APPROACH	132.955

RNAV (GNSS) SID RWY 08

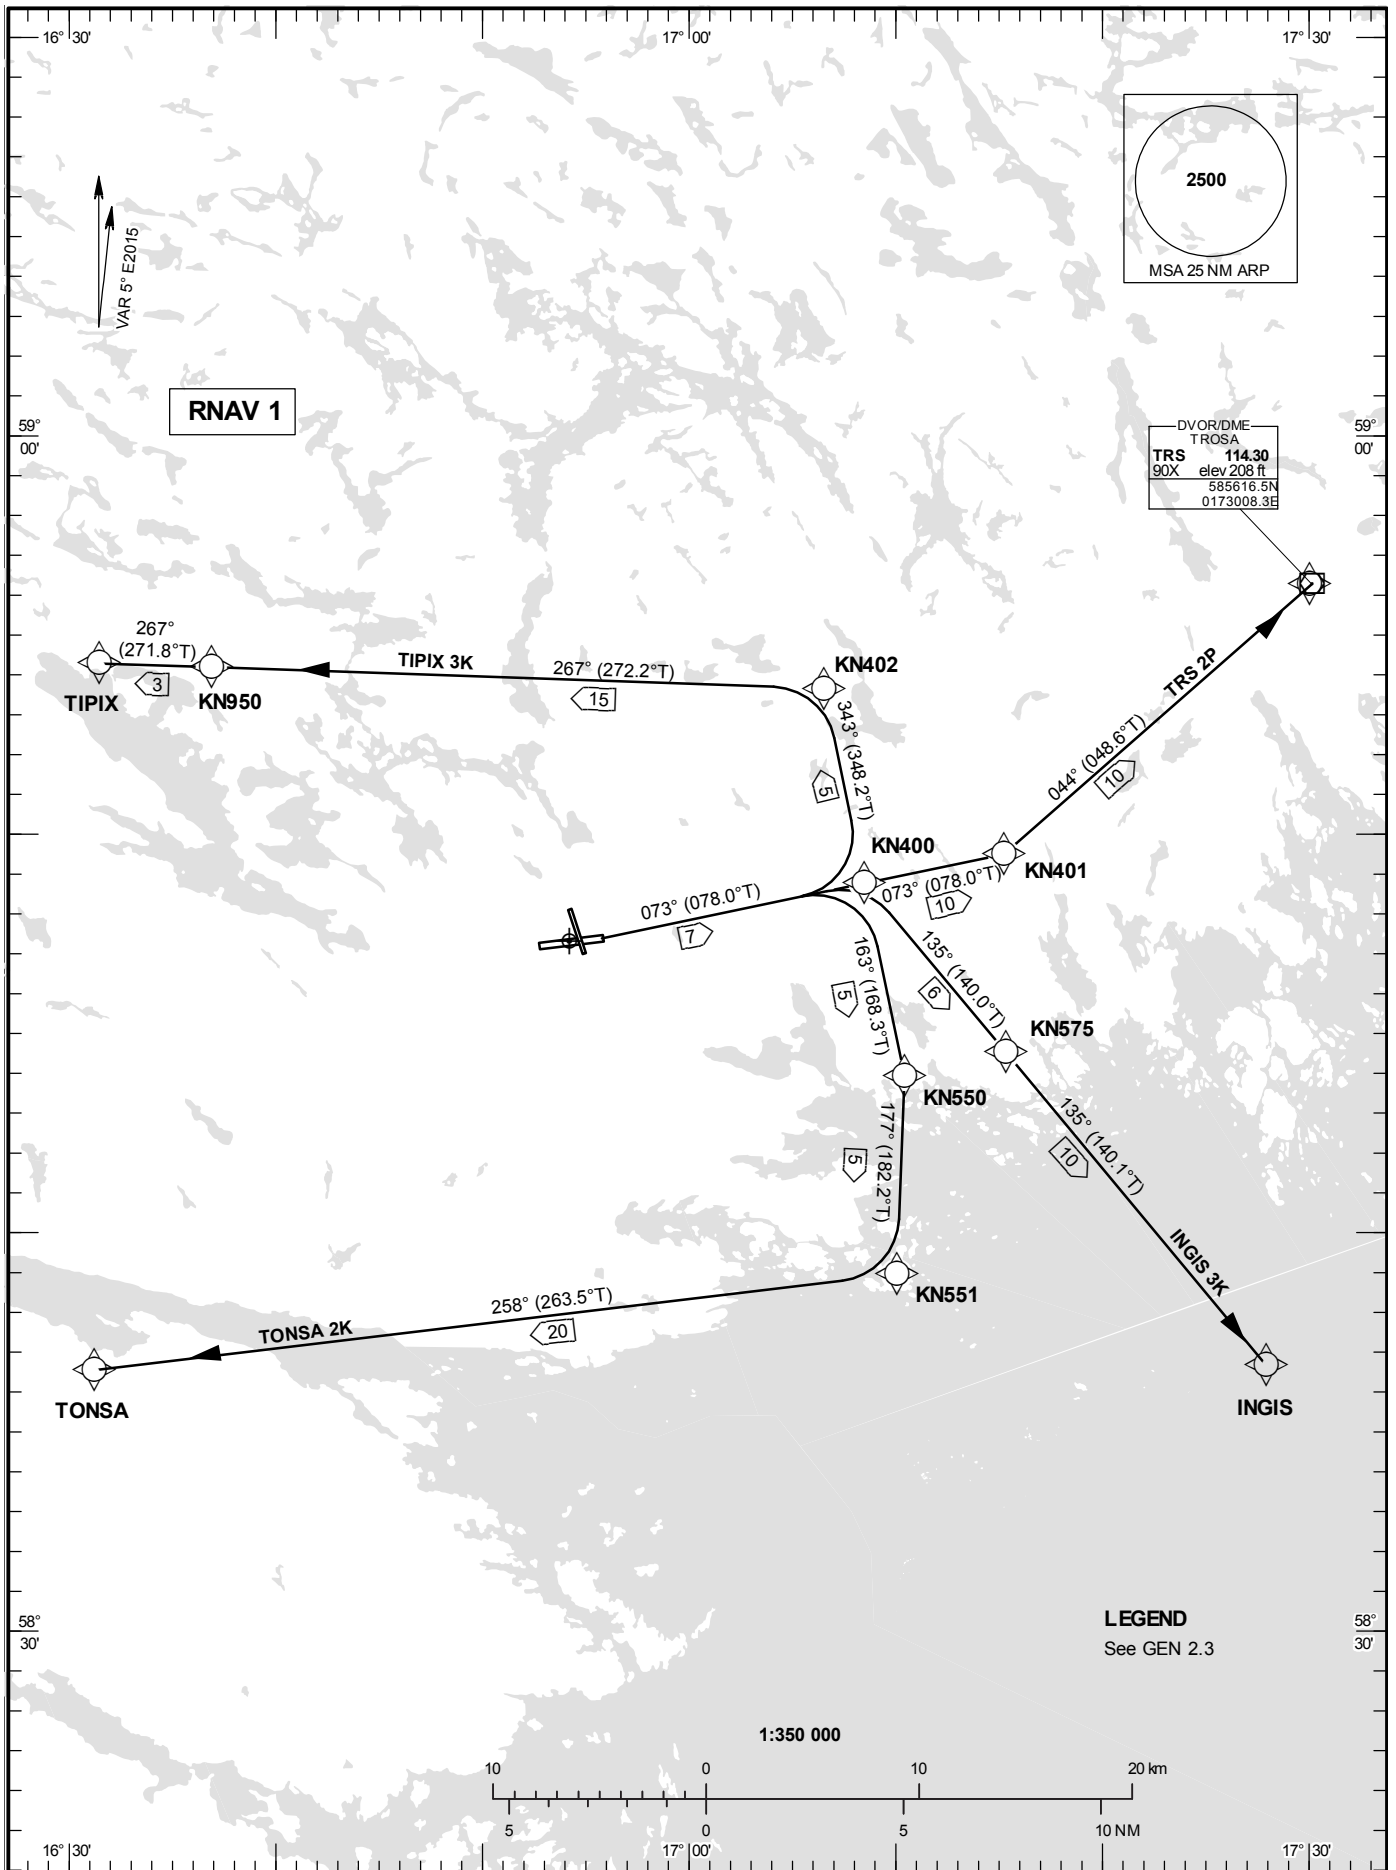

Prescribed Coding of RNAV SID for RWY 08

INGIS 3K

Path Desc	Waypoint Identifier	Fly-over	Course °M(°T)	Dist (NM)	Turn Dir	Altitude	Speed	VPA/RDH	Rec Navaid	Navigation Specification
CF	KN400	-	073°(078.0°)	6.7	R	-	-	-	TRS	RNAV 1
TF	KN575	-	135°(140.0°)	5.5	-	-	-	-	-	RNAV 1
TF	INGIS	-	135°(140.1°)	10.3	-	-	-	-	-	RNAV 1

MNM climb gradient 7.4% (450 ft/NM) is required to stay inside controlled airspace.

SID instruction: KN400 – KN575 – INGIS

TIPIX 3K

Path Desc	Waypoint Identifier	Fly-over	Course °M(°T)	Dist (NM)	Turn Dir	Altitude	Speed	VPA/RDH	Rec Navaid	Navigation Specification
CF	KN400	-	073°(078.0°)	6.7	L	-	-	-	TRS	RNAV 1
TF	KN402	-	343°(348.2°)	5.0	-	+2000	-220	-	-	RNAV 1
TF	KN950	-	267°(272.2°)	15.4	-	-	-	-	-	RNAV 1
TF	TIPIX	-	267°(271.8°)	2.8	-	-	-	-	-	RNAV 1

SID instruction: KN400 – KN402 (max IAS 220 kt until KN402) – KN950 – TIPIX

TONSA 2K

Path Desc	Waypoint Identifier	Fly-over	Course °M(°T)	Dist (NM)	Turn Dir	Altitude	Speed	VPA/RDH	Rec Navaid	Navigation Specification
CF	KN400	-	073°(078.0°)	6.7	R	-	-	-	TRS	RNAV 1
TF	KN550	-	163°(168.3°)	4.9	-	+2000	-220	-	-	RNAV 1
TF	KN551	-	177°(182.2°)	5.0	-	-	-	-	-	RNAV 1
TF	TONSA	-	258°(263.5°)	20.4	-	-	-	-	-	RNAV 1

SID instruction: KN400 – KN550 (max IAS 220 kt until KN550) – KN551 – TONSA

TRS 2P

Path Desc	Waypoint Identifier	Fly-over	Course °M(°T)	Dist (NM)	Turn Dir	Altitude	Speed	VPA/RDH	Rec Navaid	Navigation Specification
CF	KN401	-	073°(078.0°)	10.2	L	-	-	-	TRS	RNAV 1
TF	TRS	-	044°(048.6°)	10.3	-	-	-	-	-	RNAV 1

SID instruction: KN401 – TRS