


STANDARD INSTRUMENT
DEPARTURE CHART (SID) -
ICAO HGT and ALT in ft
BRG are MAG (True)
TA 5000 ft AMSL

VISBY TOWER	120.305
VISBY APPROACH	126.155

RNAV (GNSS) SID RWY 03

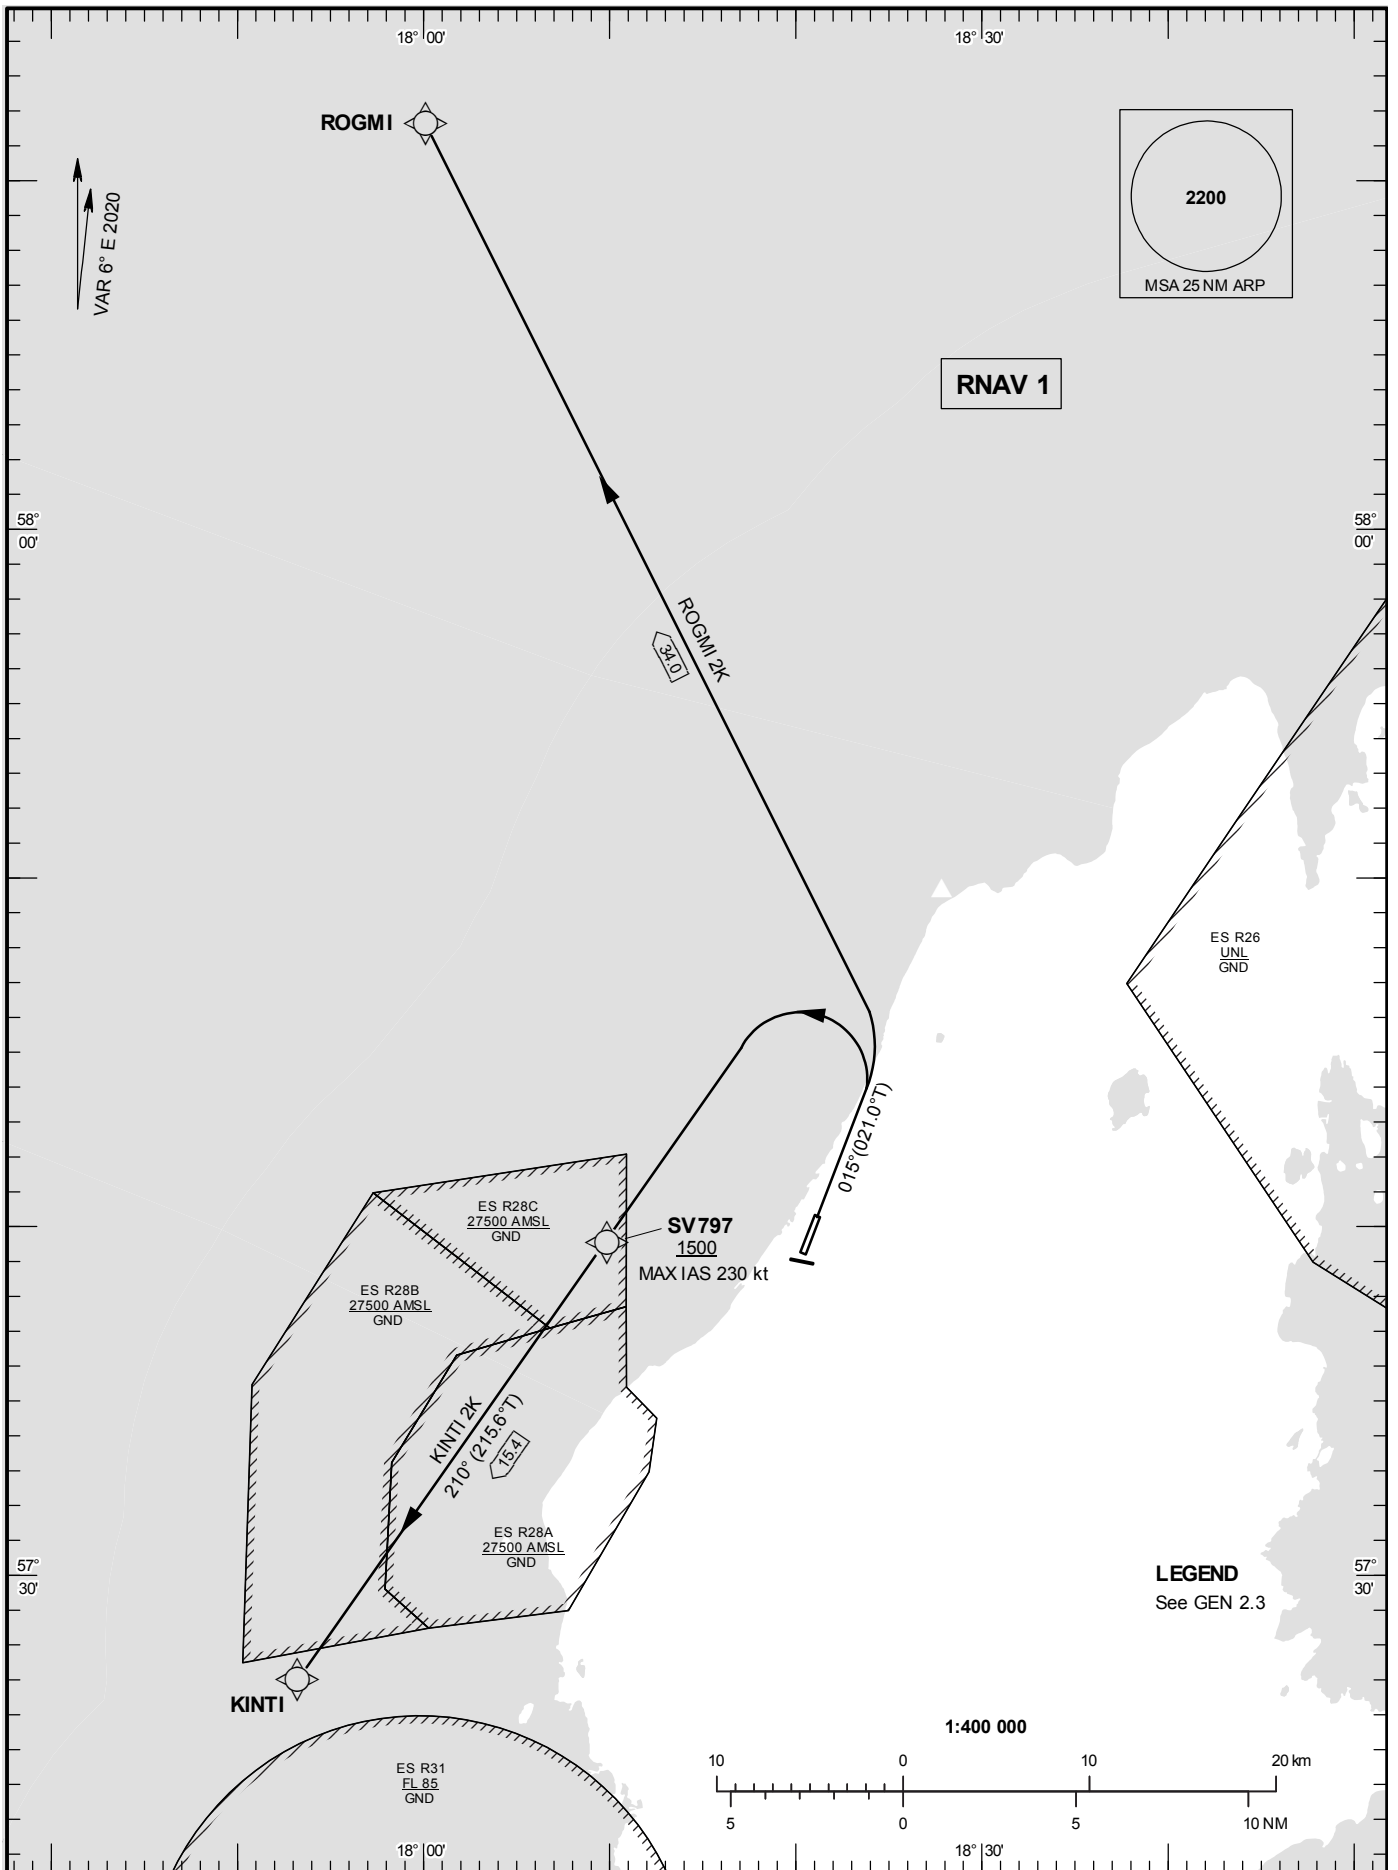

Prescribed Coding of RNAV (GNSS) SID for RWY 03**KINTI 2K**

Path Term	Waypoint Identifier	Fly-over	Course °M(°T)	Dist (NM)	Turn Dir	Rest Alts (ft AMSL)	Speed Limits (kt)	VPA/RDH (°/ft)	Rec Navaid	Navigation Specification
CA	-	-	015°(021.0°)	-	-	+700	-	-	-	RNAV 1
DF	SV797	-	-	-	L	+1500	-230	-	-	RNAV 1
TF	KINTI	-	210°(215.6°)	15.4	-	-	-	-	-	RNAV 1

SID instruction: 015° (700 ft or above) – SV797 (1500 ft or above, max IAS 230 kt until SV797 – KINTI)

ROGMI 2K

Path Term	Waypoint Identifier	Fly-over	Course °M(°T)	Dist (NM)	Turn Dir	Rest Alts (ft AMSL)	Speed Limits (kt)	VPA/RDH (°/ft)	Rec Navaid	Navigation Specification
CA	-	-	015°(021.0°)	-	-	+700	-	-	-	RNAV 1
DF	ROGMI	-	-	-	L	-	-	-	-	RNAV 1

SID instruction: 015° (700 ft or above) – ROGMI