


STANDARD INSTRUMENT
DEPARTURE CHART (SID) -
ICAO

HGT and ALT in ft
BRG are MAG (True)
TA 5000 ft AMSL

VISBY TOWER	120.305
VISBY APPROACH	126.155

RNAV (GNSS) SID RWY 21

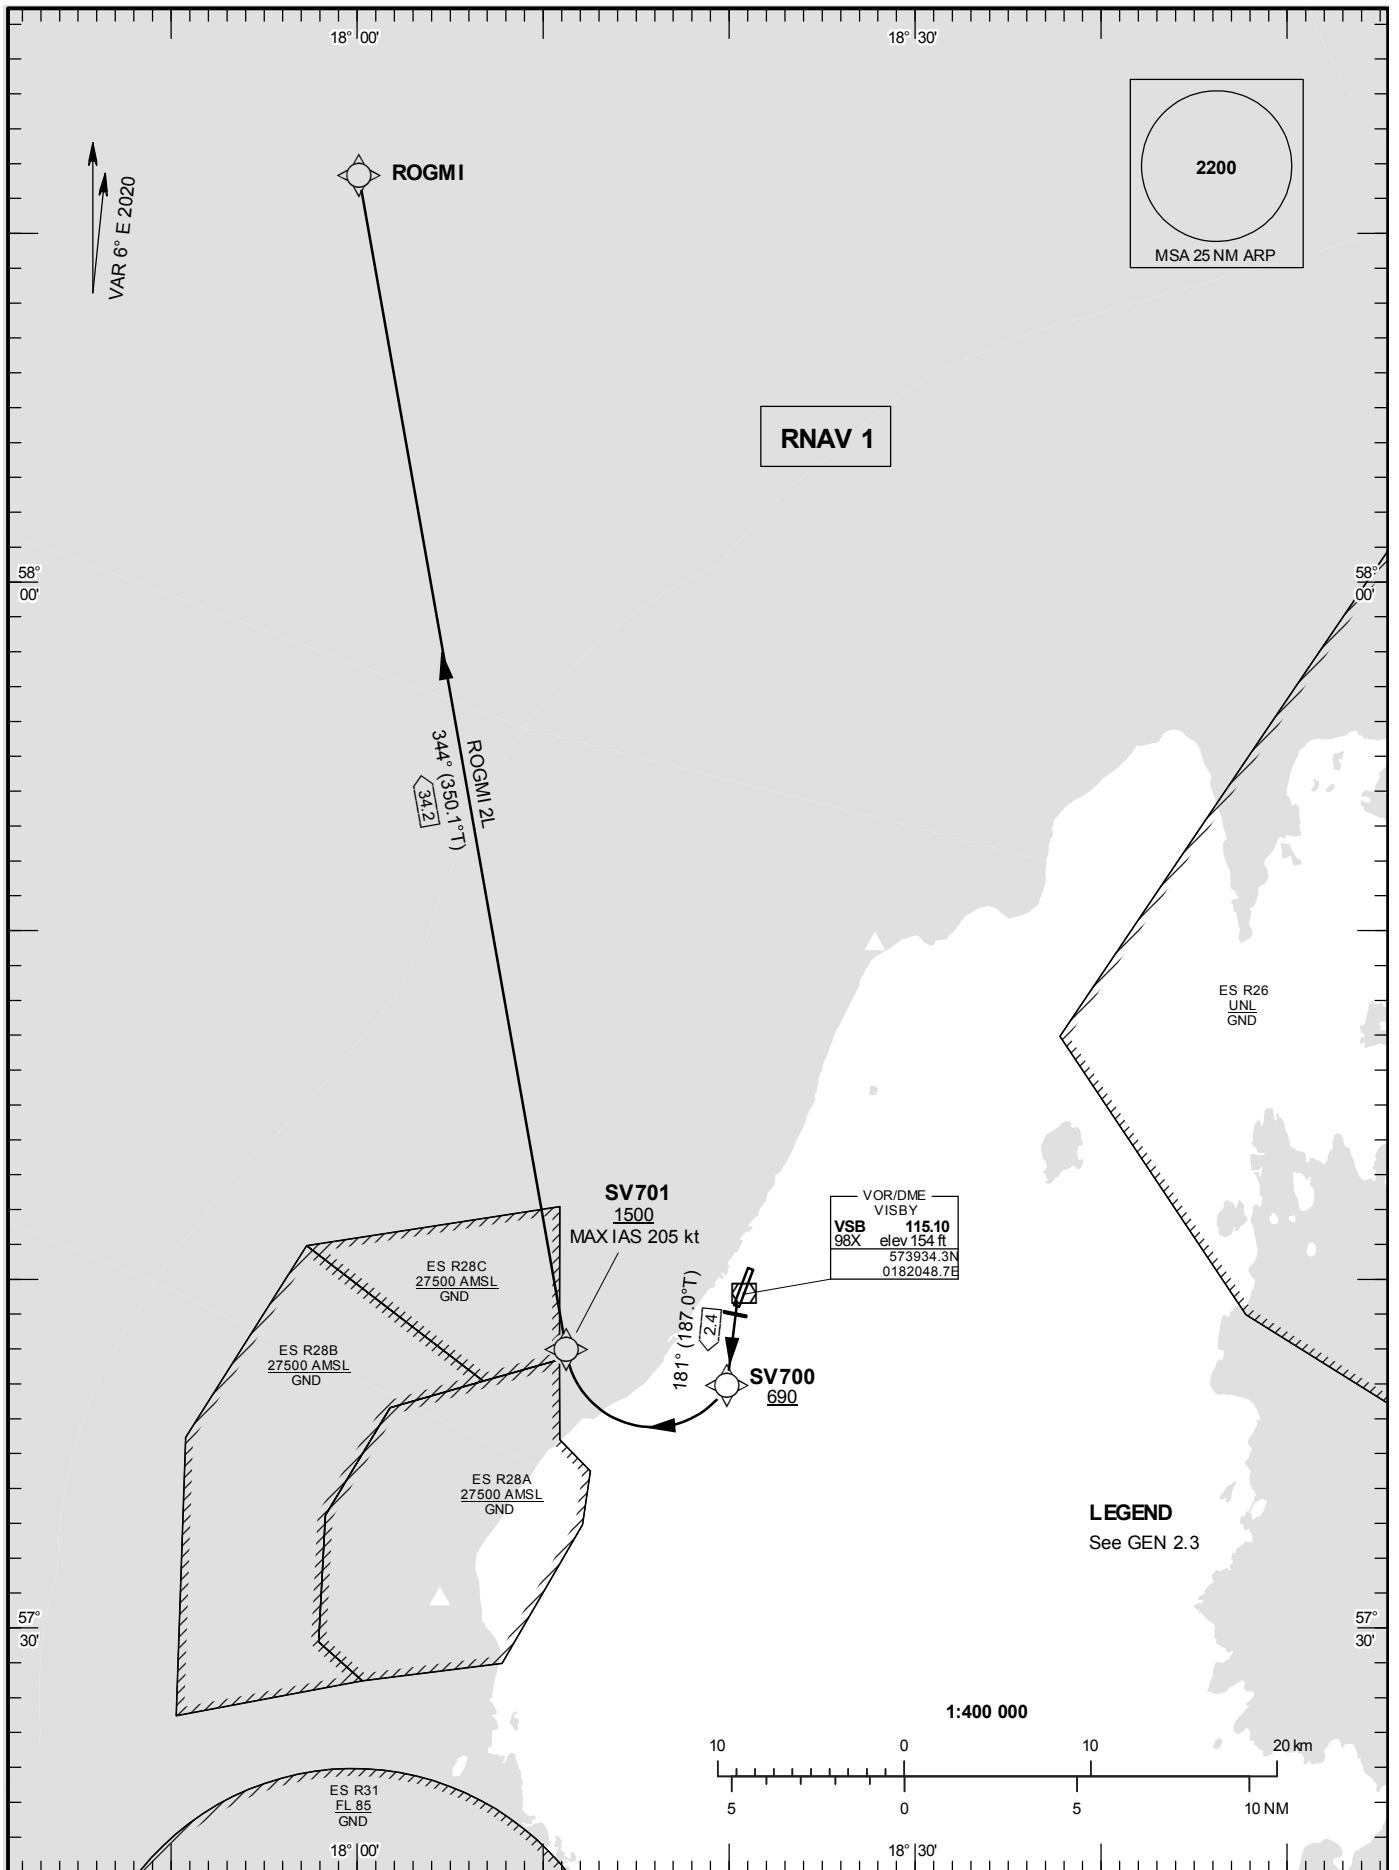

Prescribed Coding of RNAV (GNSS) SID for RWY 21**ROGMI 2L**

Path Term	Waypoint Identifier	Fly-over	Course °M(°T)	Dist (NM)	Turn Dir	Rest Alts (ft AMSL)	Speed Limits (kt)	VPA/RDH (°/ft)	Rec Navaid	Navigation Specification
CF	SV700	Y	181°(187.0°)	2.4	-	+690	-	-	VSB	RNAV 1
DF	SV701	-	-	-	R	+1500	-205	-	-	RNAV 1
TF	ROGMI	-	344°(350.1°)	34.2	-	-	-	-	-	RNAV 1

SID instruction: SV700 (MNM PDG 3.7 % (225 ft/NM), 690 ft or above) – SV701 (1500 ft or above, max IAS 205 kt until SV701) – ROGMI