


STANDARD INSTRUMENT
ARRIVAL CHART (STAR) -
ICAO

HGT and ALT in ft
BRG are MAG (True)
TA 5000 ft AMSL

| | |
|----------------|---------|
| VISBY TOWER | 120.305 |
| VISBY APPROACH | 126.155 |

RNAV (GNSS) STAR RWY 21

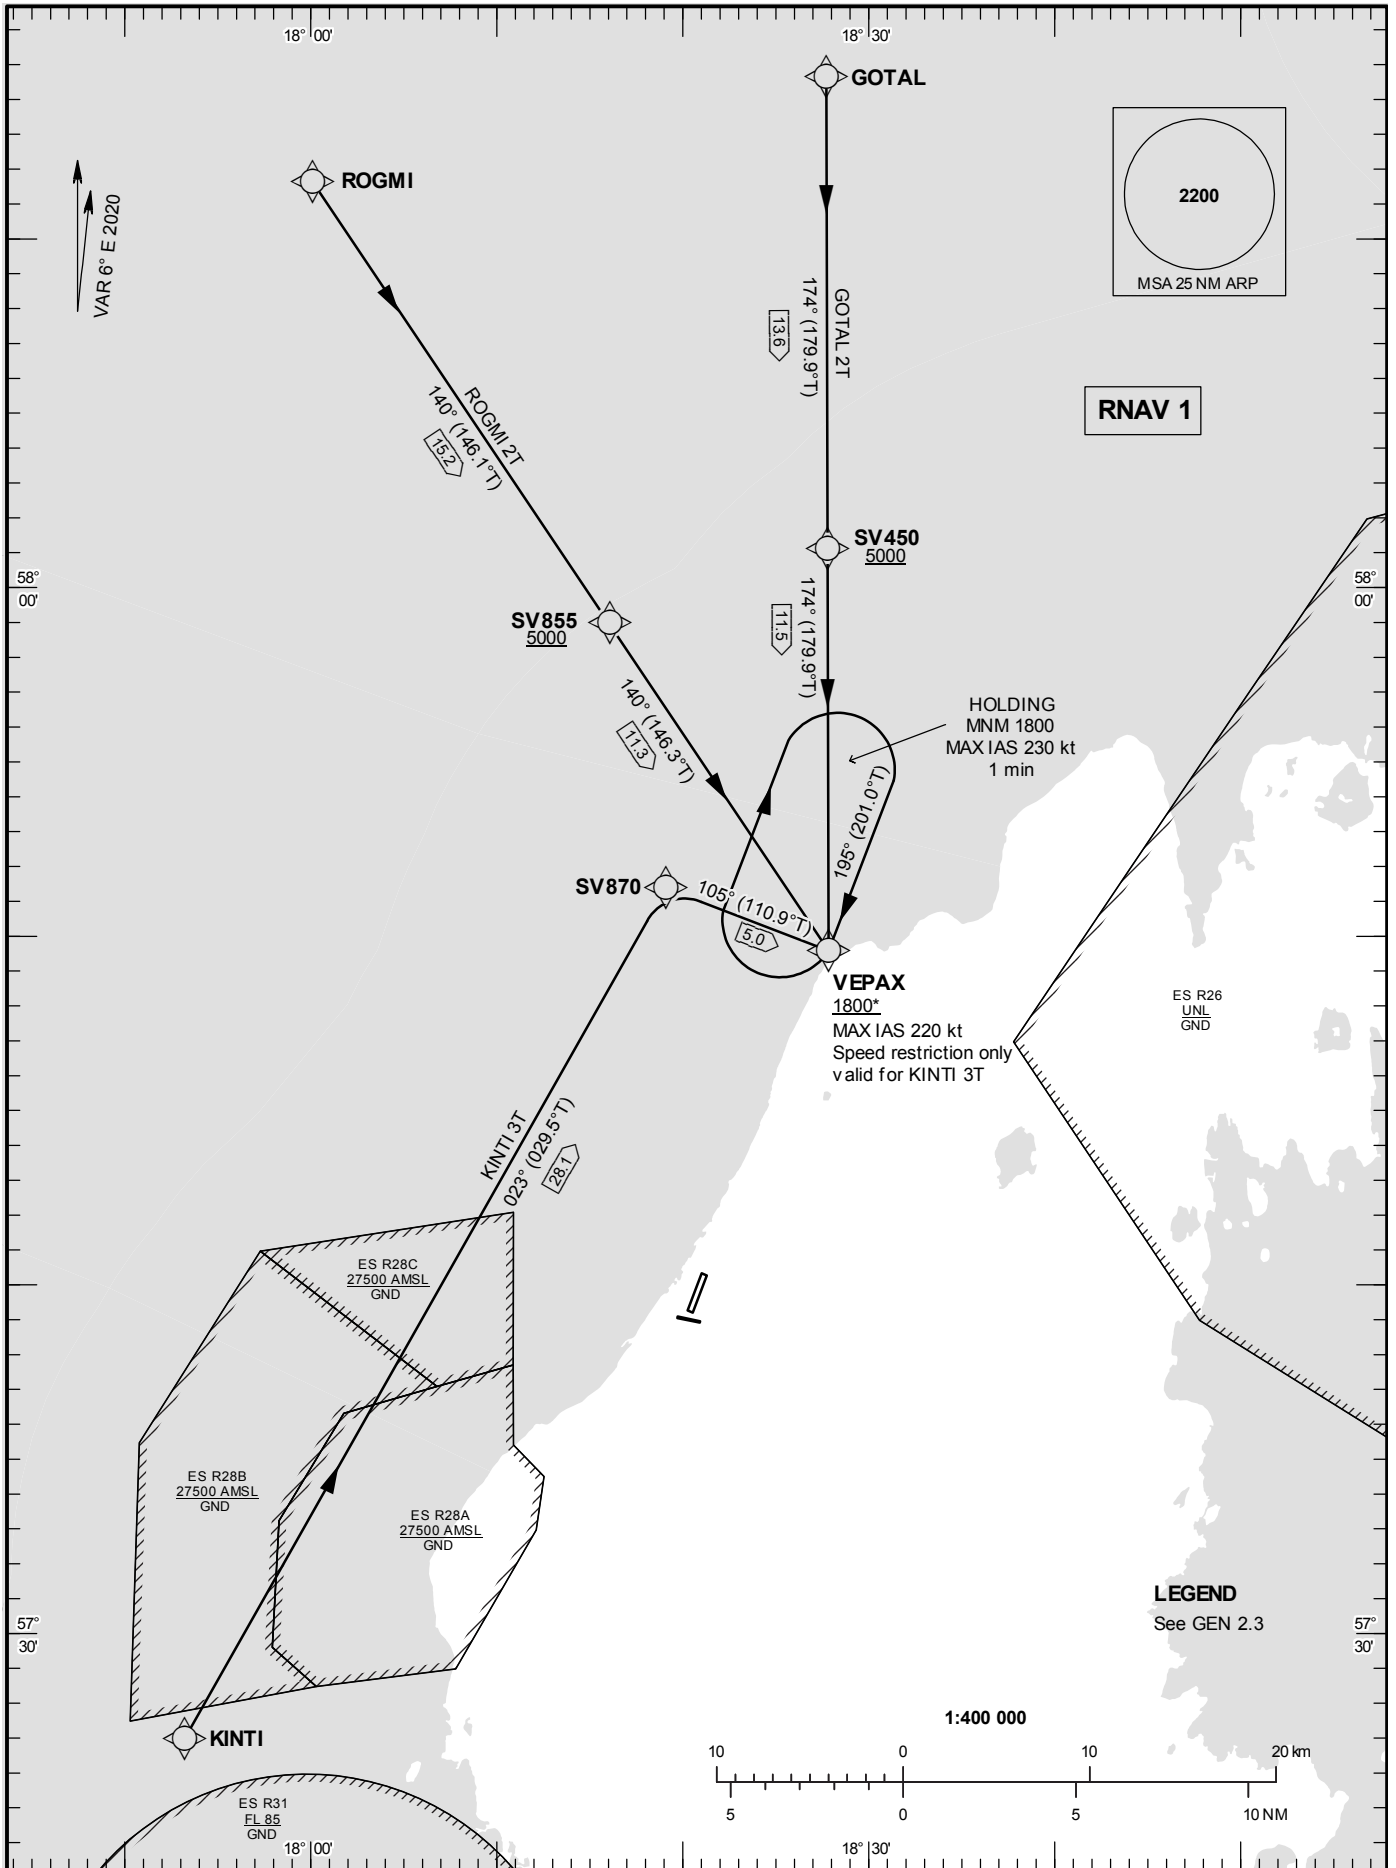

Prescribed Coding of RNAV (GNSS) STAR for RWY 21

REMARK

Specified minimum level/ALT at WPT must be adhered to unless specifically cancelled by ATC.

GOTAL 2T

| Path Term | Waypoint Identifier | Fly-over | Course °M(°T) | Dist (NM) | Turn Dir | Rest Alts (ft AMSL) | Speed Limits (kt) | VPA/RDH (°/ft) | Rec Navaid | Navigation Specification |
|-----------|---------------------|----------|---------------|-----------|----------|---------------------|-------------------|----------------|------------|--------------------------|
| IF | GOTAL | - | - | - | - | +FL100 | - | - | - | RNAV 1 |
| TF | SV450 | - | 174°(179.9°) | 13.6 | - | +5000 | - | - | - | RNAV 1 |
| TF | VEPAX | - | 174°(179.9°) | 11.5 | - | +1800 | - | - | - | RNAV 1 |

STAR instruction: GOTAL (FL100 or above) – SV450 (5000 ft or above) – VEPAX (1800 ft or above)

KINTI 3T

| Path Term | Waypoint Identifier | Fly-over | Course °M(°T) | Dist (NM) | Turn Dir | Rest Alts (ft AMSL) | Speed Limits (kt) | VPA/RDH (°/ft) | Rec Navaid | Navigation Specification |
|-----------|---------------------|----------|---------------|-----------|----------|---------------------|-------------------|----------------|------------|--------------------------|
| IF | KINTI | - | - | - | - | +FL100 | - | - | - | RNAV 1 |
| TF | SV870 | - | 023°(029.5°) | 28.1 | - | - | - | - | - | RNAV 1 |
| TF | VEPAX | - | 105°(110.9°) | 5.0 | - | +1800 | -220 | - | - | RNAV 1 |

STAR instruction: KINTI (FL100 or above) – SV870 – VEPAX (1800 ft or above, max IAS 220 kt)

ROGMI 2T

| Path Term | Waypoint Identifier | Fly-over | Course °M(°T) | Dist (NM) | Turn Dir | Rest Alts (ft AMSL) | Speed Limits (kt) | VPA/RDH (°/ft) | Rec Navaid | Navigation Specification |
|-----------|---------------------|----------|---------------|-----------|----------|---------------------|-------------------|----------------|------------|--------------------------|
| IF | ROGMI | - | - | - | - | +FL100 | - | - | - | RNAV 1 |
| TF | SV855 | - | 140°(146.1°) | 15.2 | - | +5000 | - | - | - | RNAV 1 |
| TF | VEPAX | - | 140°(146.3°) | 11.3 | - | +1800 | - | - | - | RNAV 1 |

STAR instruction: ROGMI (FL100 or above) – SV855 – VEPAX (1800 ft or above)