


GÖTEBORG/Landvetter
RNP y RWY 03 (AR)

**INSTRUMENT
APPROACH
CHART – ICAO**

THR ELEV 478.3 ft, AD ELEV 507 ft
OCH are related to THR.
BRG are MAG (True).
ALT, HGT and ELEV in ft.

LANDVETTER TOWER	118.605
LANDVETTER ATIS	118.380
GÖTEBORG APPROACH	124.680

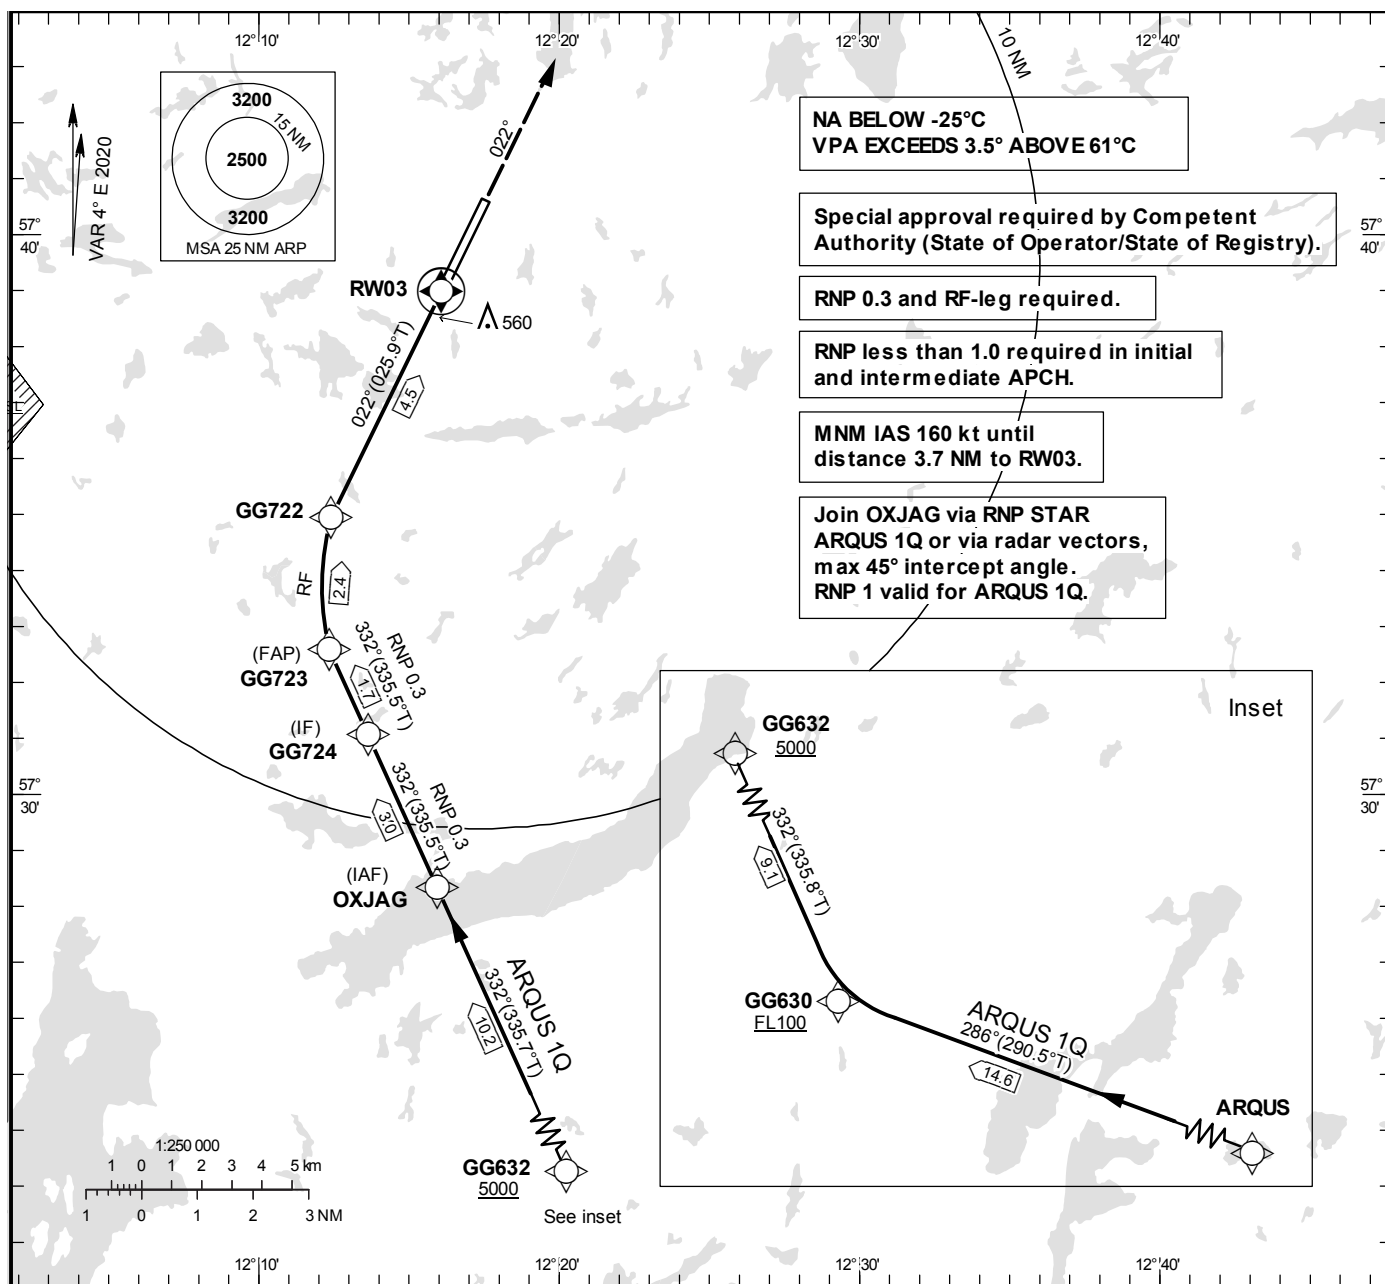

NA BELOW -25°C
VPA EXCEEDS 3.5° ABOVE 61°C

Special approval required by Competent
Authority (State of Operator/State of Registry).


RNP 0.3 and RF-leg required.

RNP less than 1.0 required in initial
and intermediate APCH.

MNM IAS 160 kt until
distance 3.7 NM to RWY03.

Join OXJAG via RNP STAR
ARQUS 1Q or via radar vectors,
max 45° intercept angle.
RNP 1 valid for ARQUS 1Q.

TA 5000 ft AMSL RDH 54.1 ft

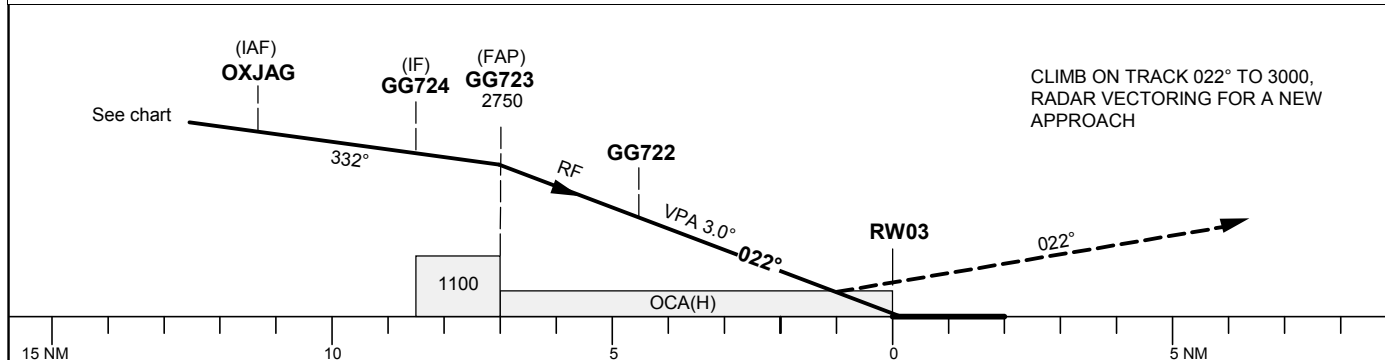

OCA (H)				
Cat of ACFT	A	B	C	D
RNP 0.3	810(332)			

CLIMB ON TRACK 022° TO 3000,
RADAR VECTURING FOR A NEW
APPROACH

CHANGE: Editorial

GÖTEBORG/Landvetter

RNP STAR RWY 03 – ARQUS 1Q

Path Term	Waypoint Identifier	Fly-over	Course °M(°T)	Dist (NM)	Turn Dir	Altitude	Speed (kts)	VPA/ RDH (°/ft)	Rec Navaid	Navigation Specification
IF	ARQUS	-	-	-	-	-	-	-	-	RNP 1.0
TF	GG630	-	286°(290.5°)	14.6	-	+FL100	-	-	-	RNP 1.0
TF	GG632	-	332°(335.8°)	9.1	-	+5000	-	-	-	RNP 1.0
TF	OXJAG	-	332°(335.7°)	10.2	-	-	-	-	-	RNP 1.0

WPT sequence: ARQUS – GG630 (FL100 or above) – GG632 (5000 or above) – OXJAG.

RNP y RWY 03 (AR)

Path Term	Waypoint Identifier	Fly-over	Course °M(°T)	Dist (NM)	Turn Dir	Altitude	Speed (kts)	VPA/ RDH (°/ft)	ARC Radius NM	ARC centre	Navigation Spec
IF	OXJAG	-	-	-	-	-	-	-	-	-	RNP 0.3
TF	GG724	-	332° (335.5°)	3.0	-	-	-	-	-	-	RNP 0.3
TF	GG723	-	332° (335.5°)	1.7	-	@2750	-	-	-	-	RNP 0.3
RF	GG722	-	-	2.4	R	-	-	-3.00	2.769	GG997	RNP 0.3
TF	RW03	Y	022° (025.9°)	4.5	-	@532	-	-3.00/54	-	-	RNP 0.3
CA	-	-	022° (025.9°)	-	-	+3000	-	-	-	-	RNP APCH
VM	-	-	022°	-	-	@3000	-	-	-	-	RNP APCH