PARKING/DOCKING CHART - ICAO

LULEÅ/KALLAX

ARP: 653236N 0220725E

AD ELEV: 65 ft

LEGEND See GEN 2.3

Dimensions in m.
ELEV in feet.
Bearings are magnetic.

REMARKS
Long time parking light ACFT Apron 10.
Docking system SAFEGATE stand 3, 4, 5.
De-icing on stand 8: Available for ACFT with max wingspan 36 m.
De-icing on stand 9: Available for all ACFT. Shall be used by ACFT with wingspan more than 36 m.
Normally taxi into de-icing stand with nose towards SE.
Nose direction towards NW to be requested in taxi-clearance.
See all guidance signs at the Ground Movement Chart.

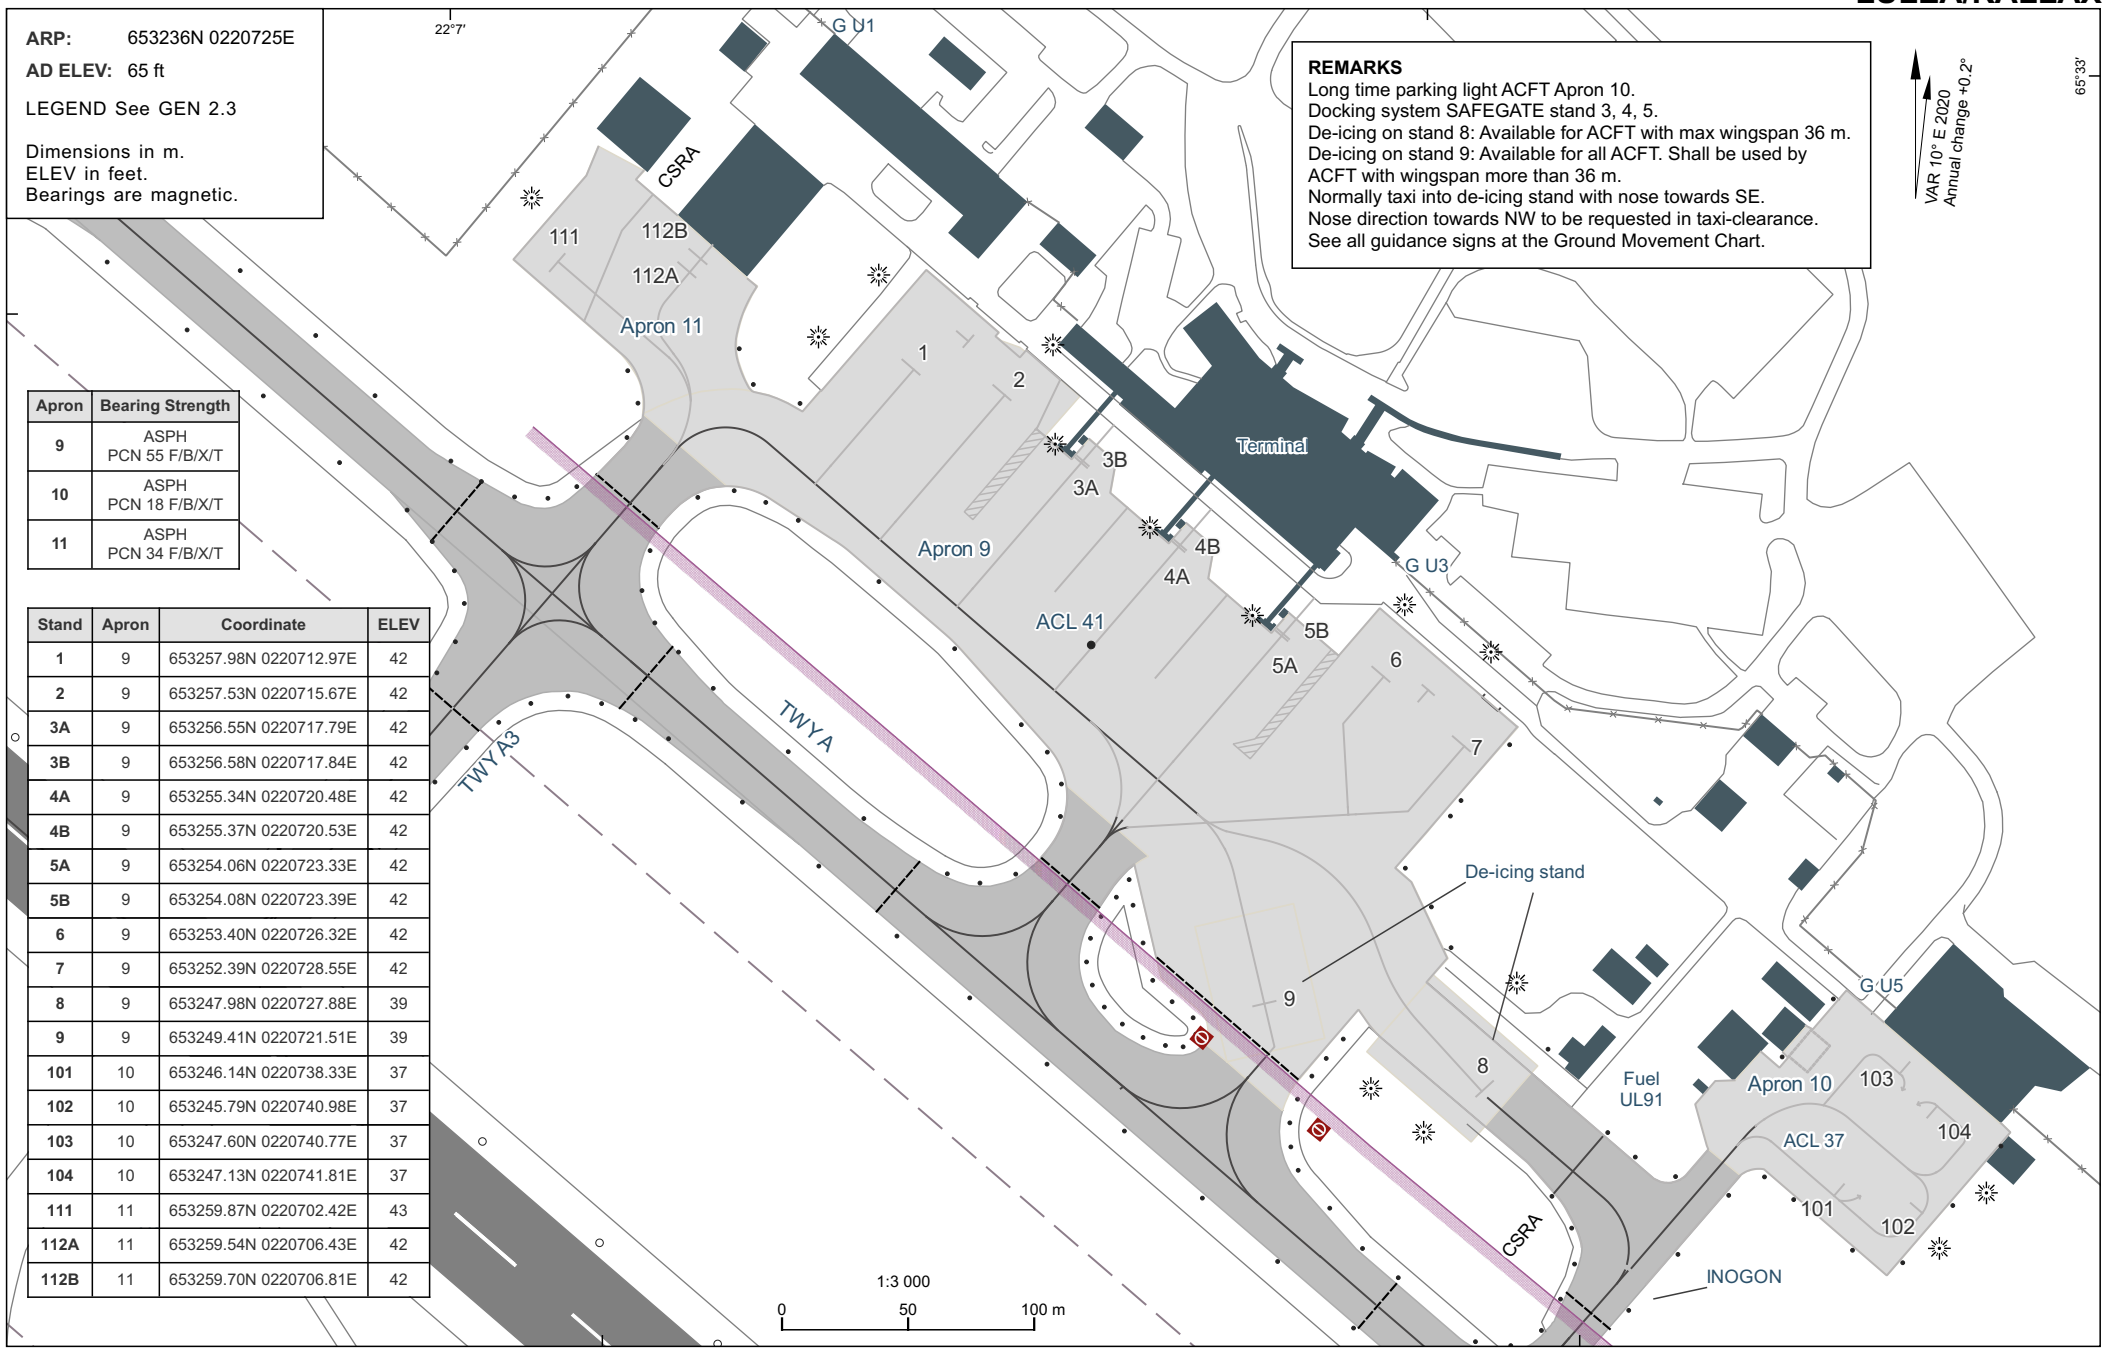

Apron	Bearing Strength
9	ASPH PCN 55 F/B/X/T
10	ASPH PCN 18 F/B/X/T
11	ASPH PCN 34 F/B/X/T

Stand	Apron	Coordinate	ELEV
1	9	653257.98N 0220712.97E	42
2	9	653257.53N 0220715.67E	42
3A	9	653256.55N 0220717.79E	42
3B	9	653256.58N 0220717.84E	42
4A	9	653255.34N 0220720.48E	42
4B	9	653255.37N 0220720.53E	42
5A	9	653254.06N 0220723.33E	42
5B	9	653254.08N 0220723.39E	42
6	9	653253.40N 0220726.32E	42
7	9	653252.39N 0220728.55E	42
8	9	653247.98N 0220727.88E	39
9	9	653249.41N 0220721.51E	39
101	10	653246.14N 0220738.33E	37
102	10	653245.79N 0220740.98E	37
103	10	653247.60N 0220740.77E	37
104	10	653247.13N 0220741.81E	37
111	11	653259.87N 0220702.42E	43
112A	11	653259.54N 0220706.43E	42
112B	11	653259.70N 0220706.81E	42

CHANGE: Apron 12A and 12B withdrawn. De-icing stands. Editorial.