

AIP SVERIGE/SWEDEN


**STANDARD INSTRUMENT
DEPARTURE CHART (SID) -
ICAO**

HGT and ALT in ft
BRG are MAG (True)
TA 5000 ft AMSL

ARLANDA TOWER	128.730
ARLANDA ATIS DEP	121.630
STOCKHOLM APPROACH	123.755

**STOCKHOLM/ARLANDA
RNAV RWY 08 Right turn**

ABENI 4R, BABAP 4R, DIGLI 4R, GALNU 4R,
LUMAX 6R, ROKNI 4R, TALEK 6R, TOVRI 5R

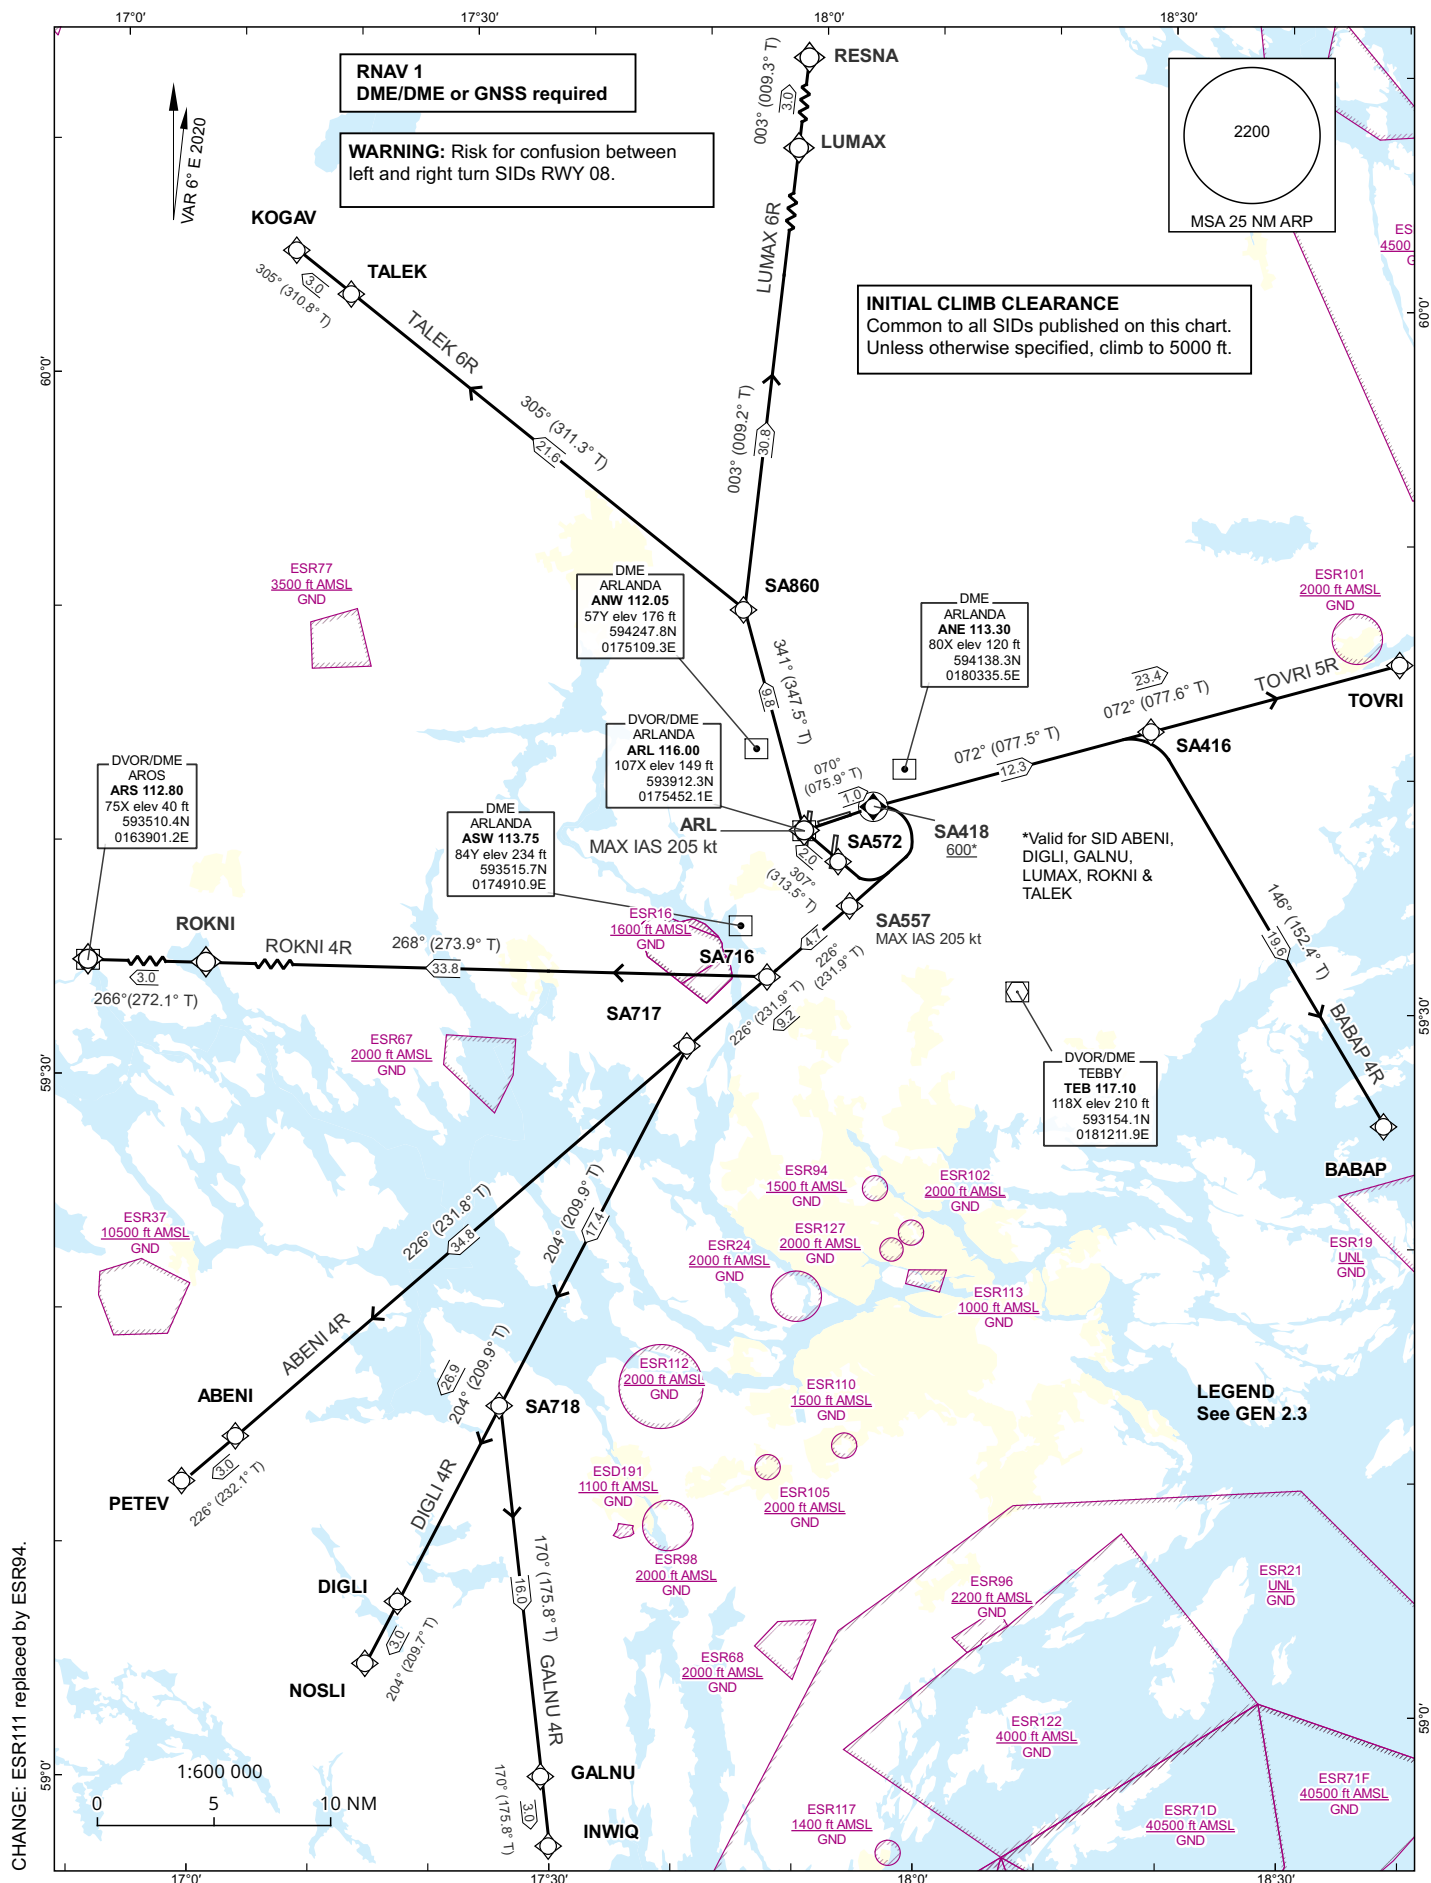

Prescribed Coding of RNAV SID for RWY 08 Right turn

RNAV SID ROKNI 4R (ROKNI FOUR ROMEO DEPARTURE)

Path Term	Waypoint Identifier	Fly-over	Course °M(°T)	Dist (NM)	Turn Dir	Altitude (ft AMSL)	Speed Limits (kt)	VPA/RDH (°/ft)	Rec Navaid	Nav Spec
CF	SA418	Y	070°(075.9°)	1.0	-	-	-	-	ARL	RNAV 1
CA	-	-	070°(075.9°)	-	-	+600	-	-	-	RNAV 1
DF	SA557	-	-	-	R	-	-205	-	-	RNAV 1
TF	SA716	-	226°(231.9°)	4.7	-	-	-	-	-	RNAV 1
TF	ROKNI	-	268°(273.9°)	33.8	-	-	-	-	-	RNAV 1
TF	ARS	-	266°(272.1°)	3.0	-	-	-	-	-	RNAV 1

SID instruction: Climb to SA418 on course 070°. At or above 600 ft turn right direct to SA557 (MAX IAS 205 kt until SA557) – SA716 – ROKNI – ARS **124.105 MHz**

ACFT unable to follow RNAV SID: Report “unable RNAV SID due RNAV type” to Clearance Delivery and “unable RNAV SID” to STOCKHOLM DEPARTURE at first contact.
Climb on track 070° to 3.2 NM ARL (MIN 600 ft before turn). Turn right to track 226° (MAX IAS 205 kt until established on track 226°). Expect vectoring to ARS.

RNAV SID ABENI 4R (ABENI FOUR ROMEO DEPARTURE)

Path Term	Waypoint Identifier	Fly-over	Course °M(°T)	Dist (NM)	Turn Dir	Altitude (ft AMSL)	Speed Limits (kt)	VPA/RDH (°/ft)	Rec Navaid	Nav Spec
CF	SA418	Y	070°(075.9°)	1.0	-	-	-	-	ARL	RNAV 1
CA	-	-	070°(075.9°)	-	-	+600	-	-	-	RNAV 1
DF	SA557	-	-	-	R	-	-205	-	-	RNAV 1
TF	ABENI	-	226°(231.8°)	34.8	-	-	-	-	-	RNAV 1
TF	PETEV	-	226°(232.1°)	3.0	-	-	-	-	-	RNAV 1

SID instruction: Climb to SA418 on course 070°. At or above 600 ft turn right direct to SA557 (MAX IAS 205 kt until SA557) – ABENI – PETEV **124.105 MHz**

ACFT unable to follow RNAV SID: Report “unable RNAV SID due RNAV type” to Clearance Delivery and “unable RNAV SID” to STOCKHOLM DEPARTURE at first contact.
Climb on track 070° to 3.2 NM ARL (MIN 600 ft before turn). Turn right to track 226° (MAX IAS 205 kt until established on track 226°). Expect vectoring to PETEV.

RNAV SID DIGLI 4R (DIGLI FOUR ROMEO DEPARTURE)

Path Term	Waypoint Identifier	Fly-over	Course °M(°T)	Dist (NM)	Turn Dir	Altitude (ft AMSL)	Speed Limits (kt)	VPA/RDH (°/ft)	Rec Navaid	Nav Spec
CF	SA418	Y	070°(075.9°)	1.0	-	-	-	-	ARL	RNAV 1
CA	-	-	070°(075.9°)	-	-	+600	-	-	-	RNAV 1
DF	SA557	-	-	-	R	-	-205	-	-	RNAV 1
TF	SA717	-	226°(231.9°)	9.2	-	-	-	-	-	RNAV 1
TF	DIGLI	-	204°(209.9°)	26.9	-	-	-	-	-	RNAV 1
TF	NOSLI	-	204°(209.7°)	3.0	-	-	-	-	-	RNAV 1

SID instruction: Climb to SA418 on course 070°. At or above 600 ft turn right direct to SA557 (MAX IAS 205 kt until SA557) – SA717 – DIGLI – NOSLI **124.105 MHz**

ACFT unable to follow RNAV SID: Report “unable RNAV SID due RNAV type” to Clearance Delivery and “unable RNAV SID” to STOCKHOLM DEPARTURE at first contact.
Climb on track 070° to 3.2 NM ARL (MIN 600 ft before turn). Turn right to track 226° (MAX IAS 205 kt until established on track 226°). Expect vectoring to NOSLI.

STOCKHOLM/ARLANDA

RNAV SID GALNU 4R (GALNU FOUR ROMEO DEPARTURE)

Path Term	Waypoint Identifier	Fly-over	Course °M(°T)	Dist (NM)	Turn Dir	Altitude (ft AMSL)	Speed Limits (kt)	VPA/RDH (°/ft)	Rec Navaid	Nav Spec
CF	SA418	Y	070°(075.9°)	1.0	-	-	-	-	ARL	RNAV 1
CA	-	-	070°(075.9°)	-	-	+600	-	-	-	RNAV 1
DF	SA557	-	-	-	R	-	-205	-	-	RNAV 1
TF	SA717	-	226°(231.9°)	9.2	-	-	-	-	-	RNAV 1
TF	SA718	-	204°(209.9°)	17.4	-	-	-	-	-	RNAV 1
TF	GALNU	-	170°(175.8°)	16.0	-	-	-	-	-	RNAV 1
TF	INWIQ	-	170°(175.8°)	3.0	-	-	-	-	-	RNAV 1

SID instruction: Climb to SA418 on course 070°. At or above 600 ft turn right direct to SA557
(MAX IAS 205 kt until SA557) – SA717 – SA718 – GALNU – INWIQ **124.105 MHz**

ACFT unable to follow RNAV SID: Report "unable RNAV SID due RNAV type" to Clearance Delivery and "unable RNAV SID" to STOCKHOLM DEPARTURE at first contact.
Climb on track 070° to 3.2 NM ARL (MIN 600 ft before turn). Turn right to track 226° (MAX IAS 205 kt until established on track 226°). Expect vectoring to INWIQ.

RNAV SID BABAP 4R (BABAP FOUR ROMEO DEPARTURE)

Path Term	Waypoint Identifier	Fly-over	Course °M(°T)	Dist (NM)	Turn Dir	Altitude (ft AMSL)	Speed Limits (kt)	VPA/RDH (°/ft)	Rec Navaid	Nav Spec
CF	SA418	Y	070°(075.9°)	1.0	-	-	-	-	ARL	RNAV 1
TF	SA416	-	072°(077.5°)	12.3	-	-	-	-	-	RNAV 1
TF	BABAP	-	146°(152.4°)	19.6	R	-	-	-	-	RNAV 1

SID instruction: Climb to SA418 on course 070° – SA416 – BABAP **130.330 MHz**

ACFT unable to follow RNAV SID: Report "unable RNAV SID due RNAV type" to Clearance Delivery and "unable RNAV SID" to STOCKHOLM DEPARTURE at first contact.
Climb on track 070°. Expect vectoring to BABAP.

RNAV SID TOVRI 5R (TOVRI FIVE ROMEO DEPARTURE)

Path Term	Waypoint Identifier	Fly-over	Course °M(°T)	Dist (NM)	Turn Dir	Altitude (ft AMSL)	Speed Limits (kt)	VPA/RDH (°/ft)	Rec Navaid	Nav Spec
CF	SA418	Y	070°(075.9°)	1.0	-	-	-	-	ARL	RNAV 1
TF	TOVRI	-	072°(077.6°)	23.4	-	-	-	-	-	RNAV 1

SID instruction: Climb to SA418 on course 070° – TOVRI **130.330 MHz**

ACFT unable to follow RNAV SID: Report "unable RNAV SID due RNAV type" to Clearance Delivery and "unable RNAV SID" to STOCKHOLM DEPARTURE at first contact.
Climb on track 070°. Expect vectoring to TOVRI.

RNAV SID LUMAX 6R (LUMAX SIX ROMEO DEPARTURE)

Path Term	Waypoint Identifier	Fly-over	Course °M(°T)	Dist (NM)	Turn Dir	Altitude (ft AMSL)	Speed Limits (kt)	VPA/RDH (°/ft)	Rec Navaid	Nav Spec
CF	SA418	Y	070°(075.9°)	1.0	-	-	-	-	ARL	RNAV 1
CA	-	-	070°(075.9°)	-	-	+600	-	-	-	RNAV 1
DF	SA572	-	-	-	R	-	-	-	-	RNAV 1
TF	ARL	-	307°(313.5°)	2.0	-	-	-205	-	-	RNAV 1
TF	SA860	-	341°(347.5°)	9.8	-	-	-	-	-	RNAV 1
TF	LUMAX	-	003°(009.2°)	30.8	-	-	-	-	-	RNAV 1
TF	RESNA	-	003°(009.3°)	3.0	-	-	-	-	-	RNAV 1

SID instruction: Climb to SA418 on course 070°. At or above 600 ft turn right direct to SA572 – ARL (MAX IAS 205 kt until ARL) – SA860 – LUMAX – RESNA **124.105 MHz**

ACFT unable to follow RNAV SID: Report “unable RNAV SID due RNAV type” to Clearance Delivery and “unable RNAV SID” to STOCKHOLM DEPARTURE at first contact.
Climb on track 070° to 3.2 NM ARL (MIN 600 ft before turn). Turn right to track 258°. Intercept R-127 ARL and proceed to ARL (MAX IAS 205 kt until ARL). Turn right to track 340°. Expect vectoring to RESNA.

RNAV SID TALEK 6R (TALEK SIX ROMEO DEPARTURE)

Path Term	Waypoint Identifier	Fly-over	Course °M(°T)	Dist (NM)	Turn Dir	Altitude (ft AMSL)	Speed Limits (kt)	VPA/RDH (°/ft)	Rec Navaid	Nav Spec
CF	SA418	Y	070°(075.9°)	1.0	-	-	-	-	ARL	RNAV 1
CA	-	-	070°(075.9°)	-	-	+600	-	-	-	RNAV 1
DF	SA572	-	-	-	R	-	-	-	-	RNAV 1
TF	ARL	-	307°(313.5°)	2.0	-	-	-205	-	-	RNAV 1
TF	SA860	-	341°(347.5°)	9.8	-	-	-	-	-	RNAV 1
TF	TALEK	-	305°(311.3°)	21.6	-	-	-	-	-	RNAV 1
TF	KOGAV	-	305°(310.8°)	3.0	-	-	-	-	-	RNAV 1

SID instruction: Climb to SA418 on course 070°. At or above 600 ft turn right direct to SA572 – ARL (MAX IAS 205 kt until ARL) – SA860 – TALEK – KOGAV **124.105 MHz**

ACFT unable to follow RNAV SID: Report “unable RNAV SID due RNAV type” to Clearance Delivery and “unable RNAV SID” to STOCKHOLM DEPARTURE at first contact.
Climb on track 070° to 3.2 NM ARL (MIN 600 ft before turn). Turn right to track 258°. Intercept R-127 ARL and proceed to ARL (MAX IAS 205 kt until ARL). Turn right to track 340°. Expect vectoring to KOGAV.