


AIP SVERIGE/SWEDEN  
**STANDARD INSTRUMENT  
ARRIVAL CHART (STAR) -  
ICAO**

HGT and ALT in ft  
BRG are MAG (True)  
TA 5000 ft AMSL

HALMSTAD TOWER	130.105
	135.055

**HALMSTAD  
RNAV STAR RWY 19**

PELOX 4T

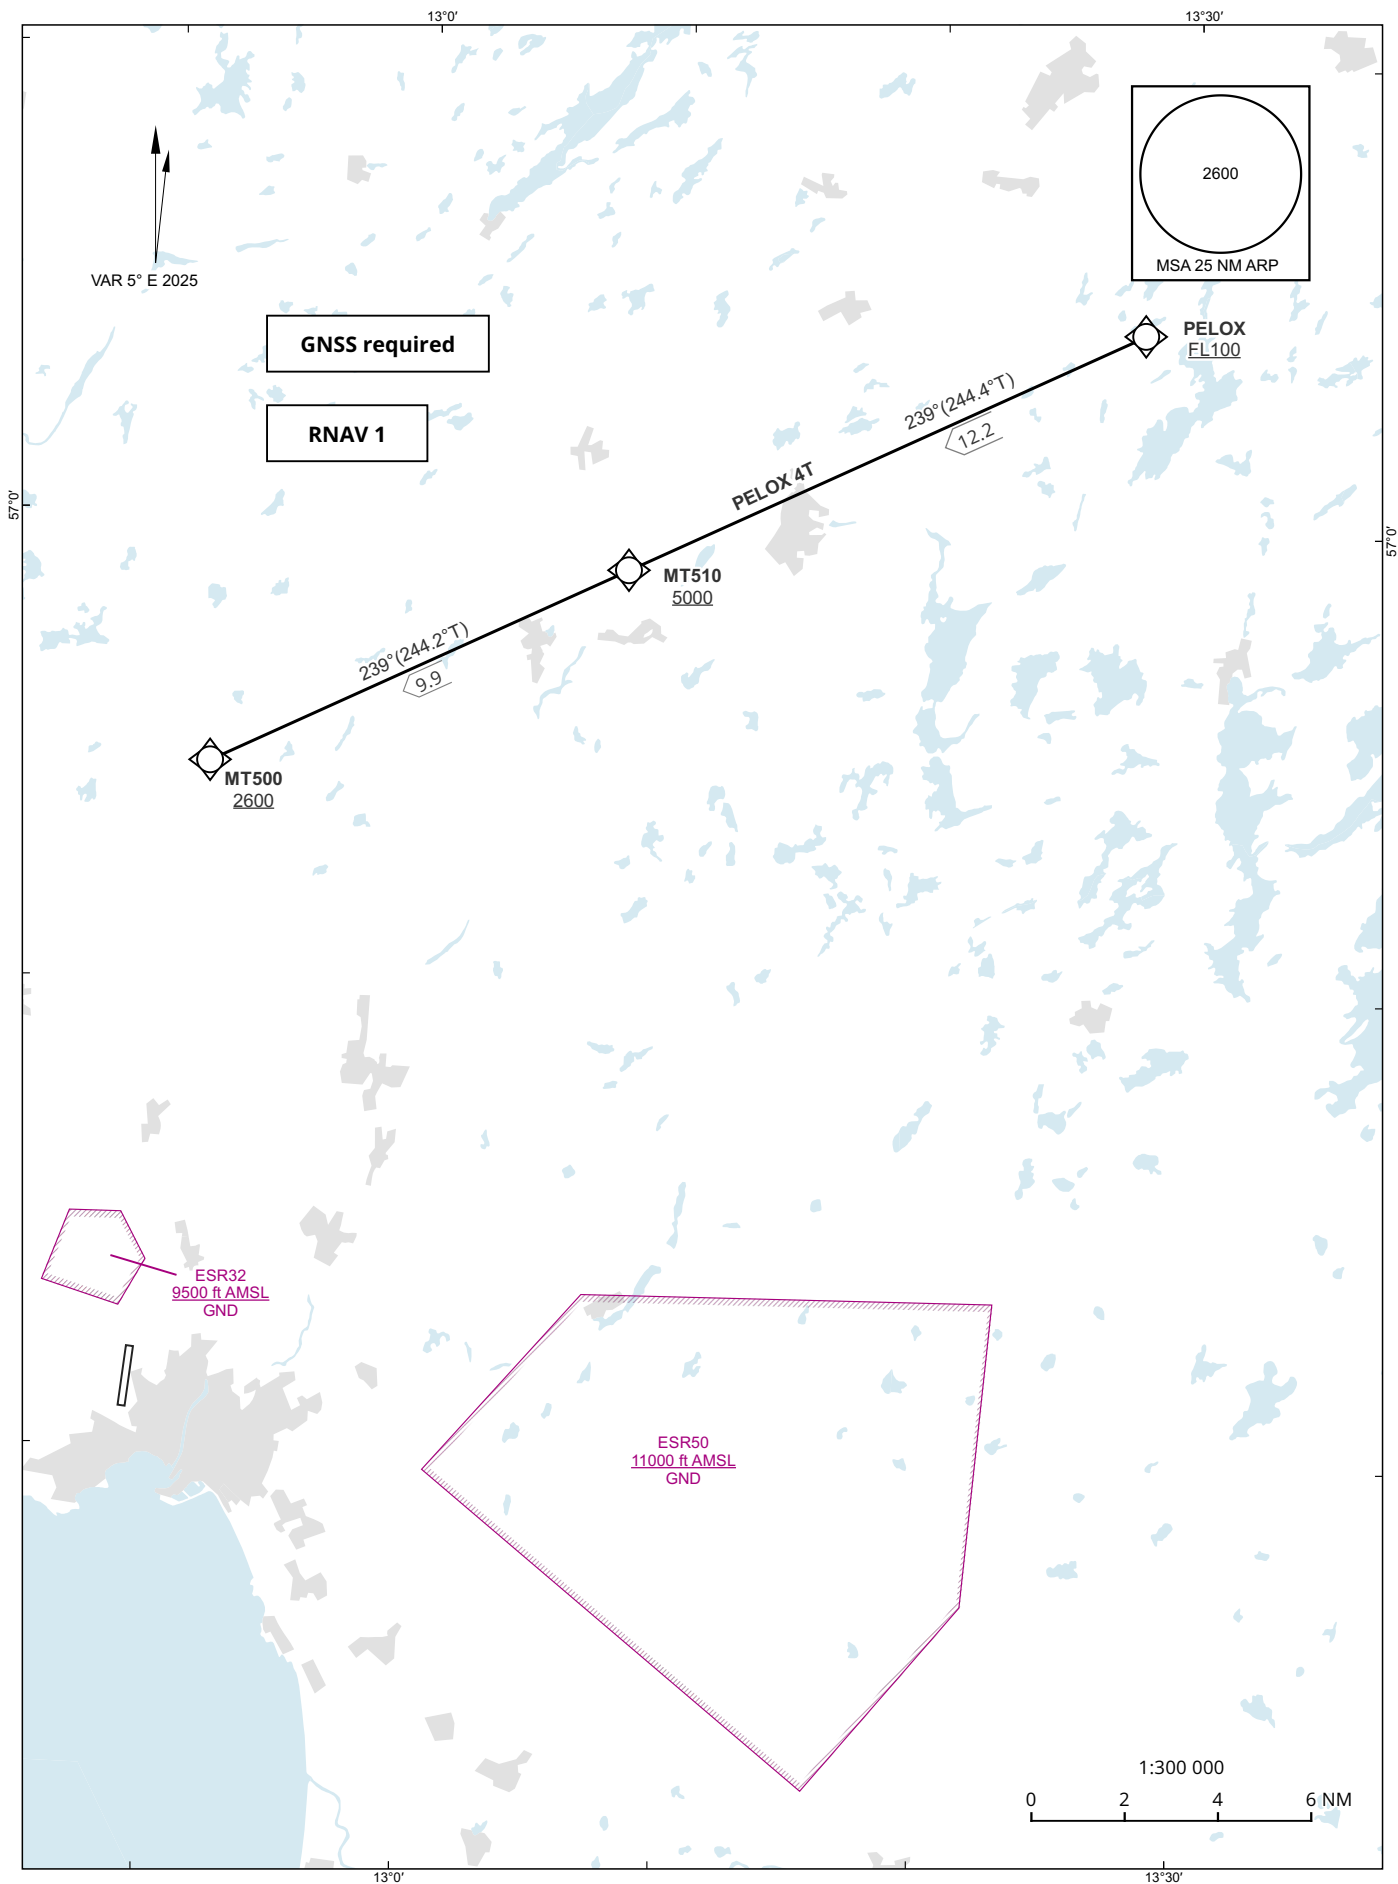

CHANGE: VAR, designator

Prescribed Coding of RNAV STAR for RWY 19

**PELOX 4T**

Path Term	Waypoint Identifier	Fly-over	Course °M(°T)	Dist (NM)	Turn Dir	Rest Alts (ft AMSL)	Speed Limits (kt)	VPA/RDH (°/ft)	Rec Navaid	Nav Spec
IF	PELOX	-	-	-	-	+FL100	-	-	-	RNAV 1
TF	MT510	-	239°(244.4°)	12.2	-	+5000	-	-	-	RNAV 1
TF	MT500	-	239°(244.2°)	9.9	-	+2600	-	-	-	RNAV 1

STAR instruction: PELOX (FL100 or above) - MT510 (5000 ft or above) - MT500 (2600 ft or above)