

AERODROME CHART - ICAO

TWR 129.555

SUNDSVALL-TIMRA

ARP: 623146N 0172634E  
AD ELEV: 17 ft  
LEGEND See GEN 2.3  
Dimensions in m.  
ELEV in feet.  
Bearings are magnetic.  
RWY/TWY markings/lightings, see ESNN AD 2.9.  
Declared Distances, see ESNN AD 2.13  
Approach and Runway lighting, see ESNN AD 2.14.

VAR 7° E 2020  
Annual change +0.2°


**BGN RWY 16**  
623211.68N  
0172614.36E  
ELEV 16.7 ft

THR	BRG	THR POS, GUND	Surface, Bearing Strength	THR ELEV TDZ ELEV	VASIS (MEHT)
16	153°	623207.12N 0172617.86E GUND 84.9 ft	ASPH PCN 50 F/B/X/T	THR 17.1 ft TDZ 17.1 ft	PAPI LEFT /3.25° (60 ft)
34	333°	623112.31N 0172700.73E GUND 84.7 ft	ASPH PCN 50 F/B/X/T	THR 13.3 ft TDZ 13.3 ft	PAPI LEFT /3.00° (57 ft)

**REMARK:**  
Begin RWY 16, 150 m in front of THR.  
Begin RWY 34, 144 m in front of THR.  
Apron S, A-aircraft only. Apron M, pushback required from stand 15 for aircraft with dimensions equivalent to B737 and A320.

TWY	Surface, Bearing Strength	Width
A	ASPH PCN 29 F/B/X/T	23 m
B	ASPH PCN 50 F/B/X/T	18 m
C	ASPH PCN 50 F/B/X/T	15 m
D	ASPH PCN 50 F/B/X/T	23 m

Apron	Surface, Bearing Strength
M	ASPH PCN 50 F/B/X/T
N	ASPH PCN 50 F/B/X/T
S	ASPH PCN 10 F/B/X/T

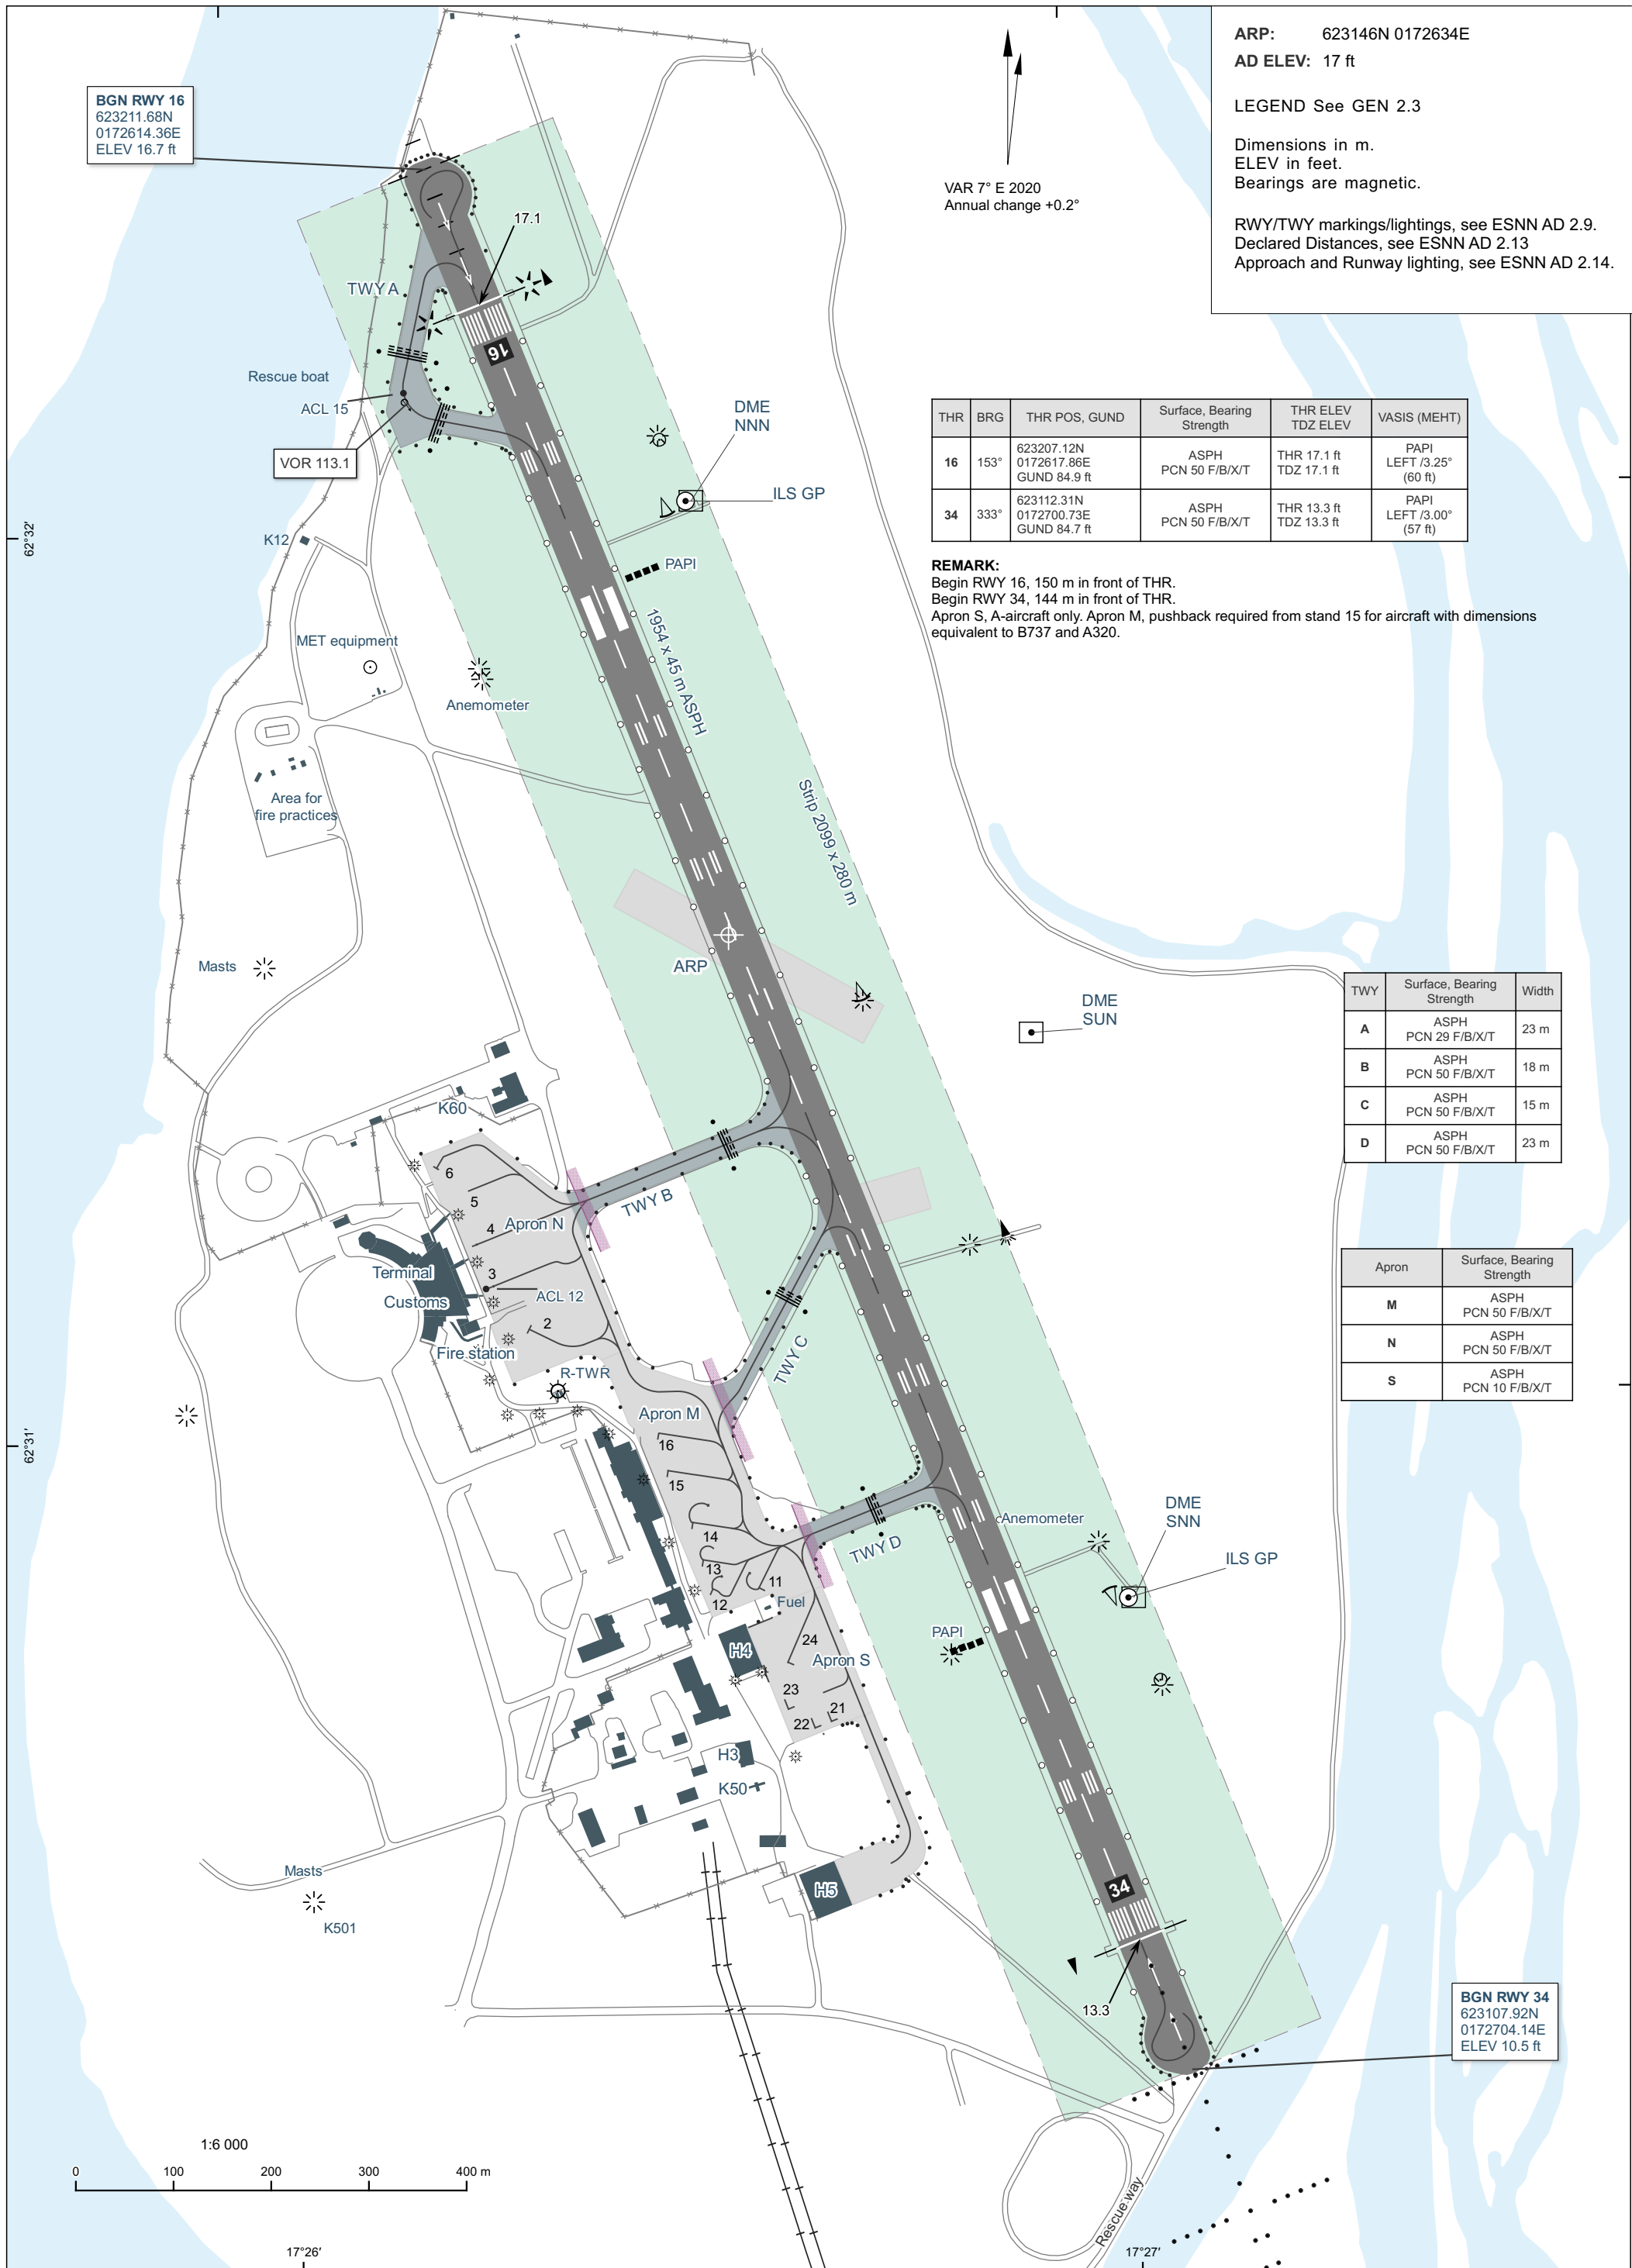

**BGN RWY 34**  
623107.92N  
0172704.14E  
ELEV 10.5 ft

CHANGE: Strip dimension. Editorial.