


**STANDARD INSTRUMENT
DEPARTURE CHART (SID) -
ICAO**

HGT and ALT in ft
BRG are MAG
TA 5000 ft AMSL

KALLAX TOWER	128.205
KALLAX APPROACH	125.455


RNAV (GNSS) SID RWY 14

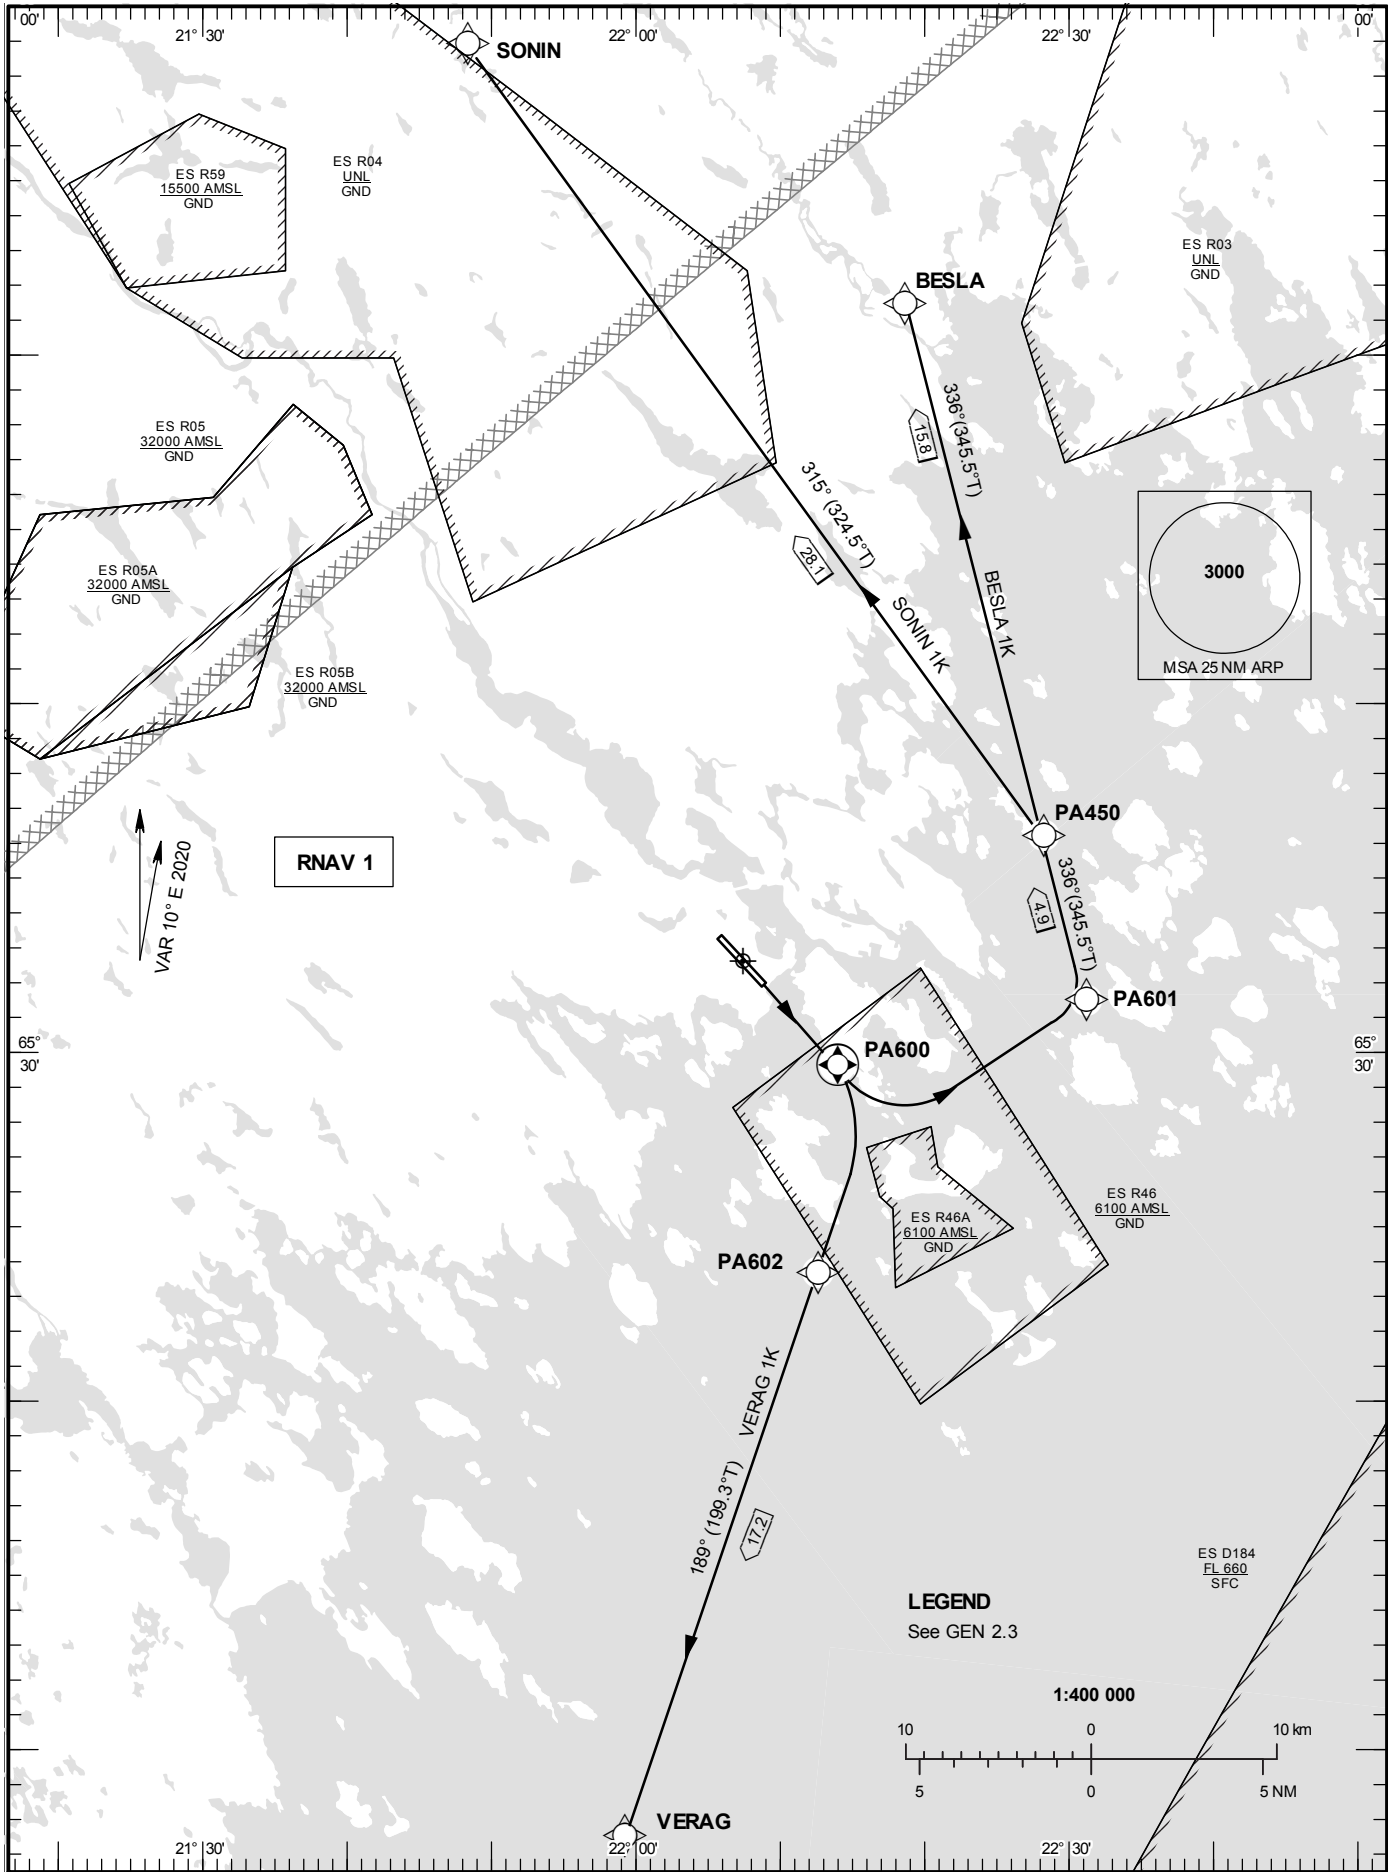

RNAV 1

VAR 10° E 2020

LEGEND
See GEN 2.3



CHANGE: Frequency

LULEÅ/Kallax**Prescribed Coding of RNAV SID for RWY 14**

RNAV 1 for positioning update.

Operators unable to fly RNAV 1 shall inform ATC "UNABLE RNAV SID". Radar vectors will then be provided.

For ATC reasons, aircraft proceeding on SID shall use 6.6% (400 ft/NM) as minimum climb gradient. Aircraft unable to meet with this procedure shall inform ATC.

BESLA 1K

Path Term	Waypoint Identifier	Fly-over	Course °M(°T)	Dist (NM)	Turn Dir	Rest Alts (ft AMSL)	Speed Limits (kt)	VPA/RDH (°/ft)	Rec Navaid	Navigation Specification
DF	PA600	Y	-	-	-	-	-	-	-	RNAV 1
DF	PA601	-	-	-	L	-	-230	-	-	RNAV 1
TF	PA450	-	336°(345.5°)	4.9	-	-	-	-	-	RNAV 1
TF	BESLA	-	336°(345.5°)	15.8	-	-	-	-	-	RNAV 1

SID instruction: PA600 – PA601(max IAS 230kt until PA601) – PA450 – BESLA

SONIN 1K

Path Term	Waypoint Identifier	Fly-over	Course °M(°T)	Dist (NM)	Turn Dir	Rest Alts (ft AMSL)	Speed Limits (kt)	VPA/RDH (°/ft)	Rec Navaid	Navigation Specification
DF	PA600	Y	-	-	-	-	-	-	-	RNAV 1
DF	PA601	-	-	-	L	-	-230	-	-	RNAV 1
TF	PA450	-	336°(345.5°)	4.9	-	-	-	-	-	RNAV 1
TF	SONIN	-	315°(324.5°)	28.1	-	-	-	-	-	RNAV 1

SID instruction: PA600 – PA601(max IAS 230kt until PA601) – PA450 – SONIN

VERAG 1K

Path Term	Waypoint Identifier	Fly-over	Course °M(°T)	Dist (NM)	Turn Dir	Rest Alts (ft AMSL)	Speed Limits (kt)	VPA/RDH (°/ft)	Rec Navaid	Navigation Specification
DF	PA600	Y	-	-	-	-	-	-	-	RNAV 1
DF	PA602	-	-	-	R	-	-	-	-	RNAV 1
TF	VERAG	-	189°(199.3°)	17.2	-	-	-	-	-	RNAV 1

SID instruction: PA600 – PA602 – VERAG