


ATC Surveillance Minimum Altitude Chart

STOCKHOLM/ARLANDA


<b>ESSA AD ELEV 138 FT</b>	<b>ARLANDA TOWER</b>	<b>118.505 125.130</b>	<b>ARLANDA ATIS ARR</b>	<b>119.005</b>
<b>ESSB AD ELEV 47 FT</b>	<b>BROMMA TOWER</b>	<b>118.105</b>	<b>ARLANDA ATIS DEP</b>	<b>121.630</b>
<b>ESCM AD ELEV 69 FT</b>	<b>UPPSALA TOWER</b>	<b>119.205</b>	<b>BROMMA ATIS</b>	<b>122.455</b>
<b>TA 5000 AMSL</b>			<b>STOCKHOLM APPROACH</b>	<b>120.155 123.755</b>
<b>ELEV and ALT in ft</b>			<b>SWEDEN CONTROL</b>	<b>126.655</b>
<b>HGT in ft above AD ELEV</b>			<b>UPPSALA APPROACH</b>	<b>130.405</b>

THIS CHART MAY ONLY BE USED FOR CROSS-CHECKING OF ASSIGNED ALTITUDES WHILST IN RECEIPT OF RADAR SERVICE LEVELS ASSIGNED BY ATC INCLUDE A CORRECTION FOR LOW TEMPERATURE EFFECT

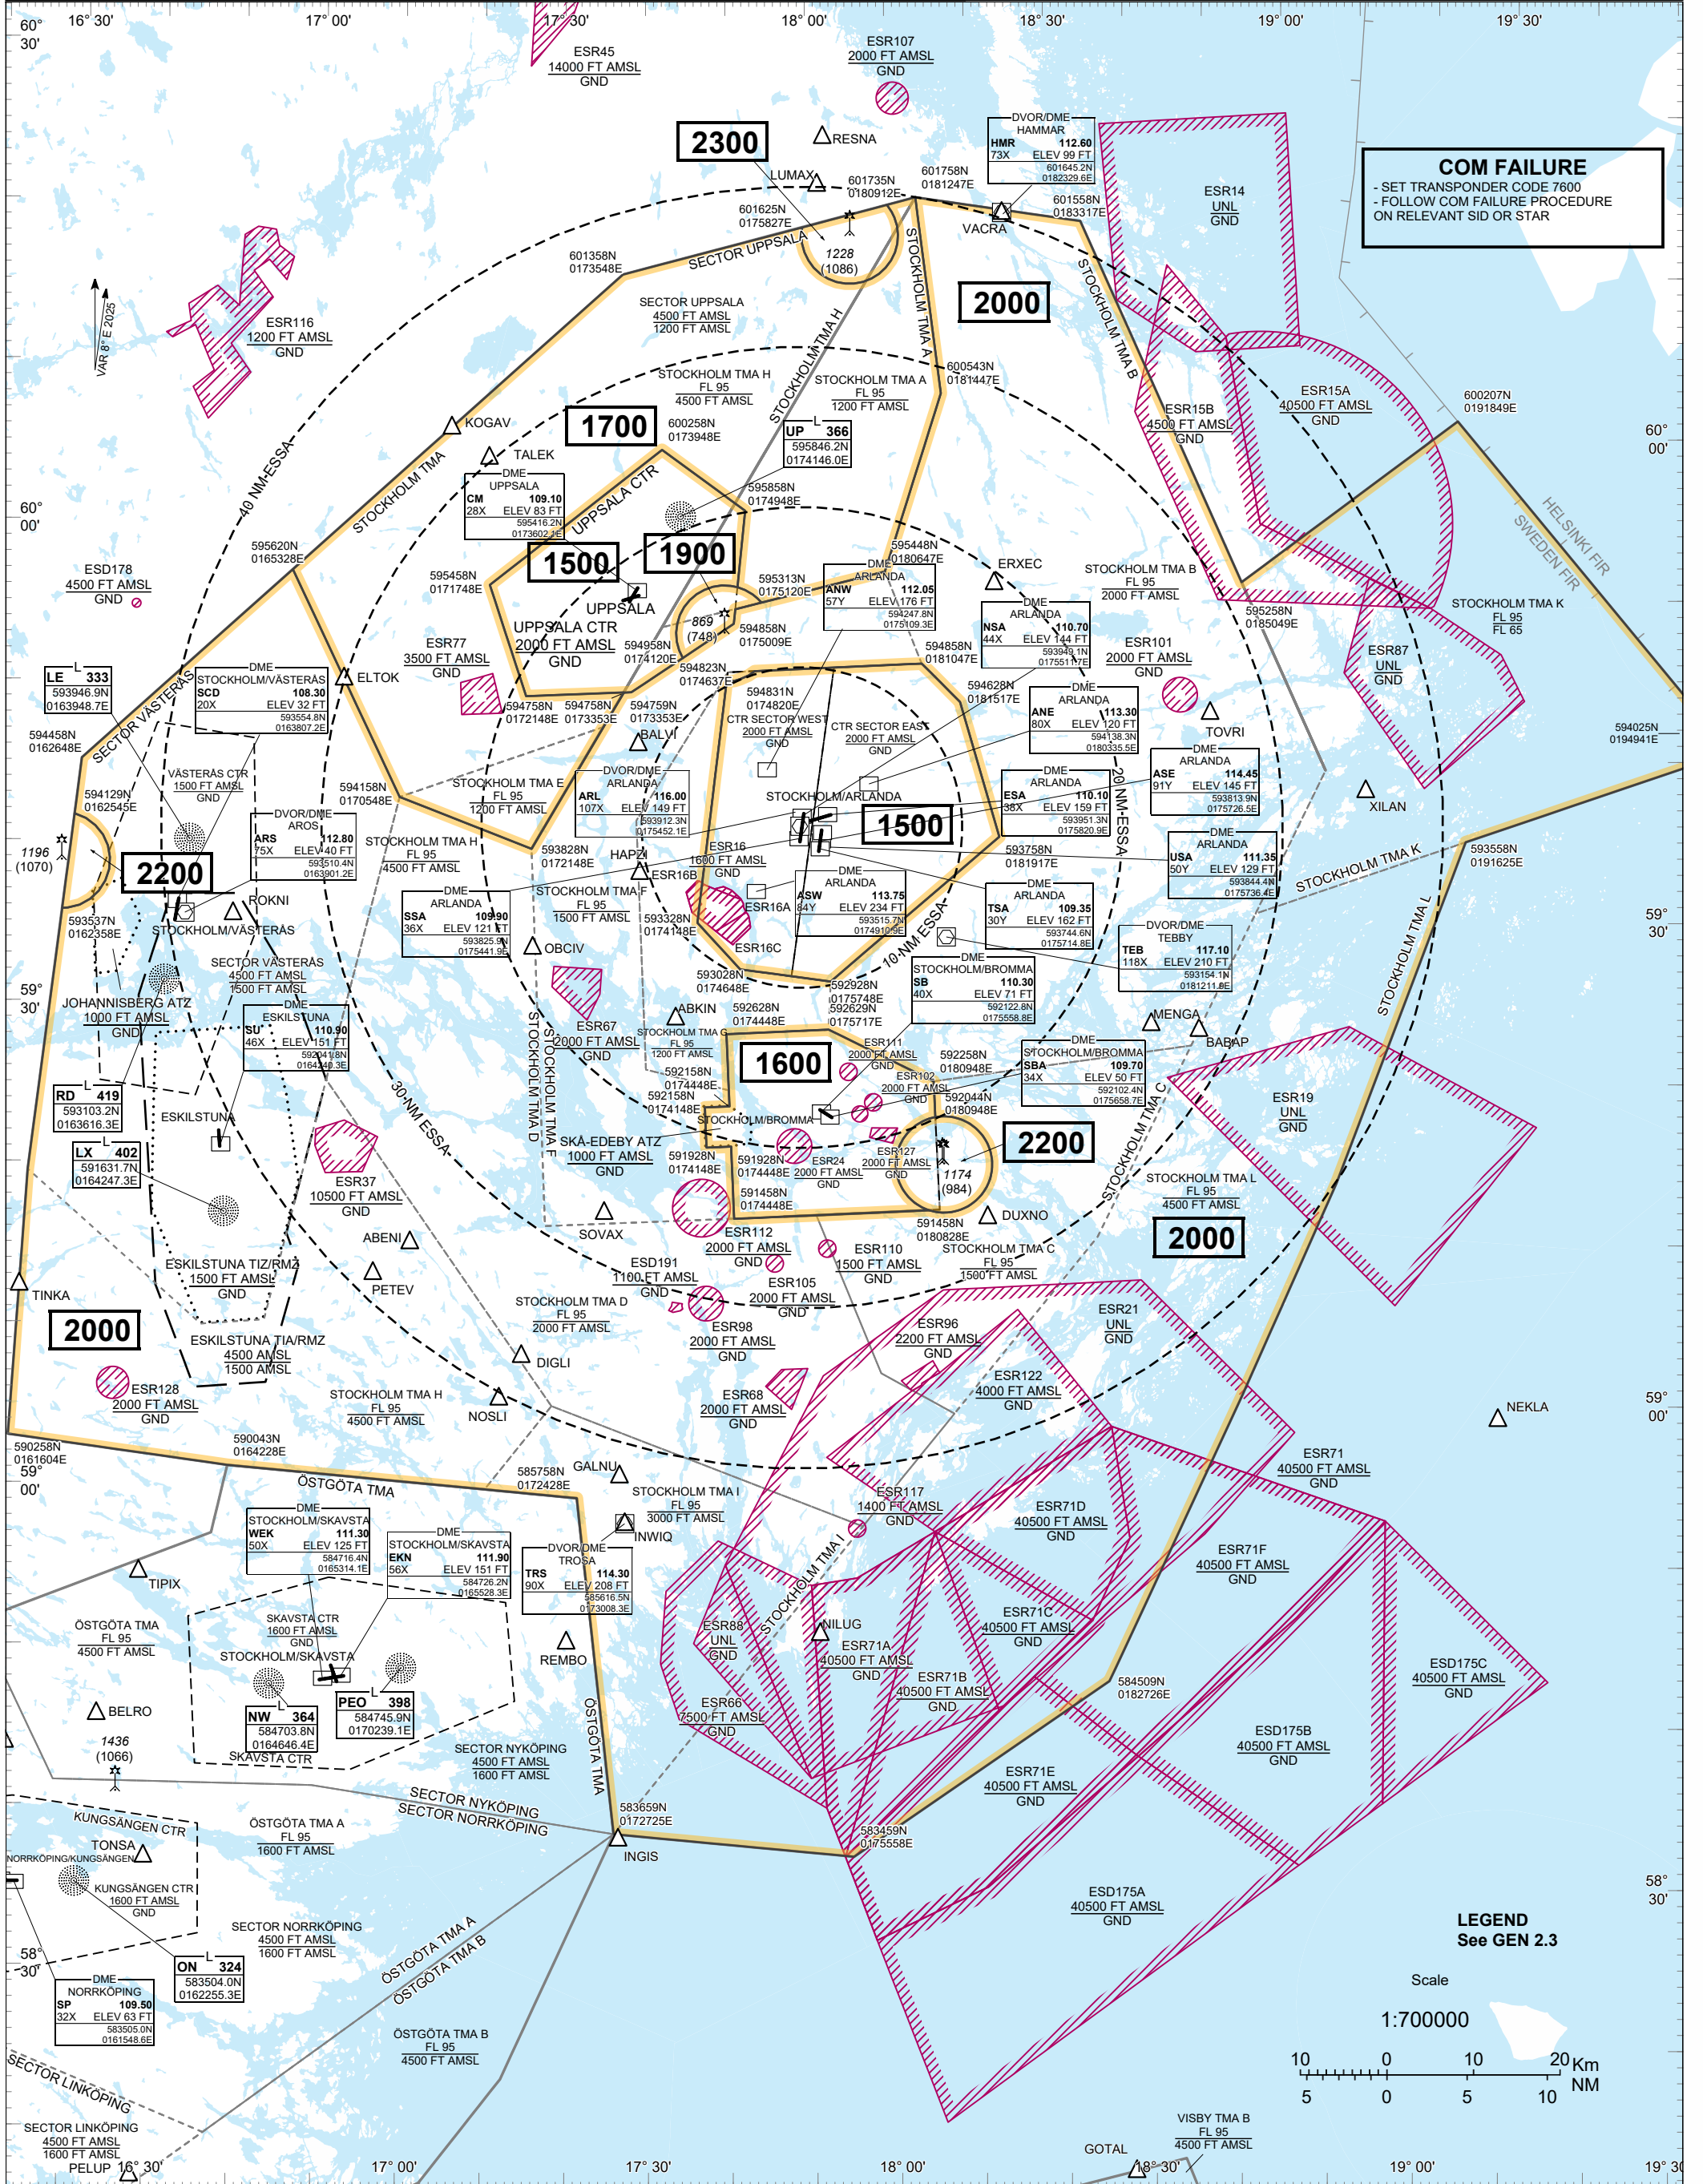

**COM FAILURE**  
 - SET TRANSPONDER CODE 7600  
 - FOLLOW COM FAILURE PROCEDURE ON RELEVANT SID OR STAR

**LEGEND**  
See GEN 2.3

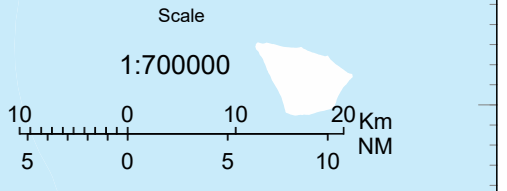

CHANGE: ESR209A and ESR209B withdrawn. UPPSALA FREQ