


AIP SVERIGE/SWEDEN
**STANDARD INSTRUMENT
ARRIVAL CHART (STAR) -
ICAO**

HGT and ALT in ft	BROMMA TOWER	118.105
BRG are MAG (True)	ARLANDA ATIS	122.455
TA 5000 ft AMSL	STOCKHOLM APPROACH	123.755

**STOCKHOLM/BROMMA
RNAV RWY 30**

ARS 9Y, INWIQ 1Y, TINKA 8Y, VACRA 1Y, XILAN 9Y

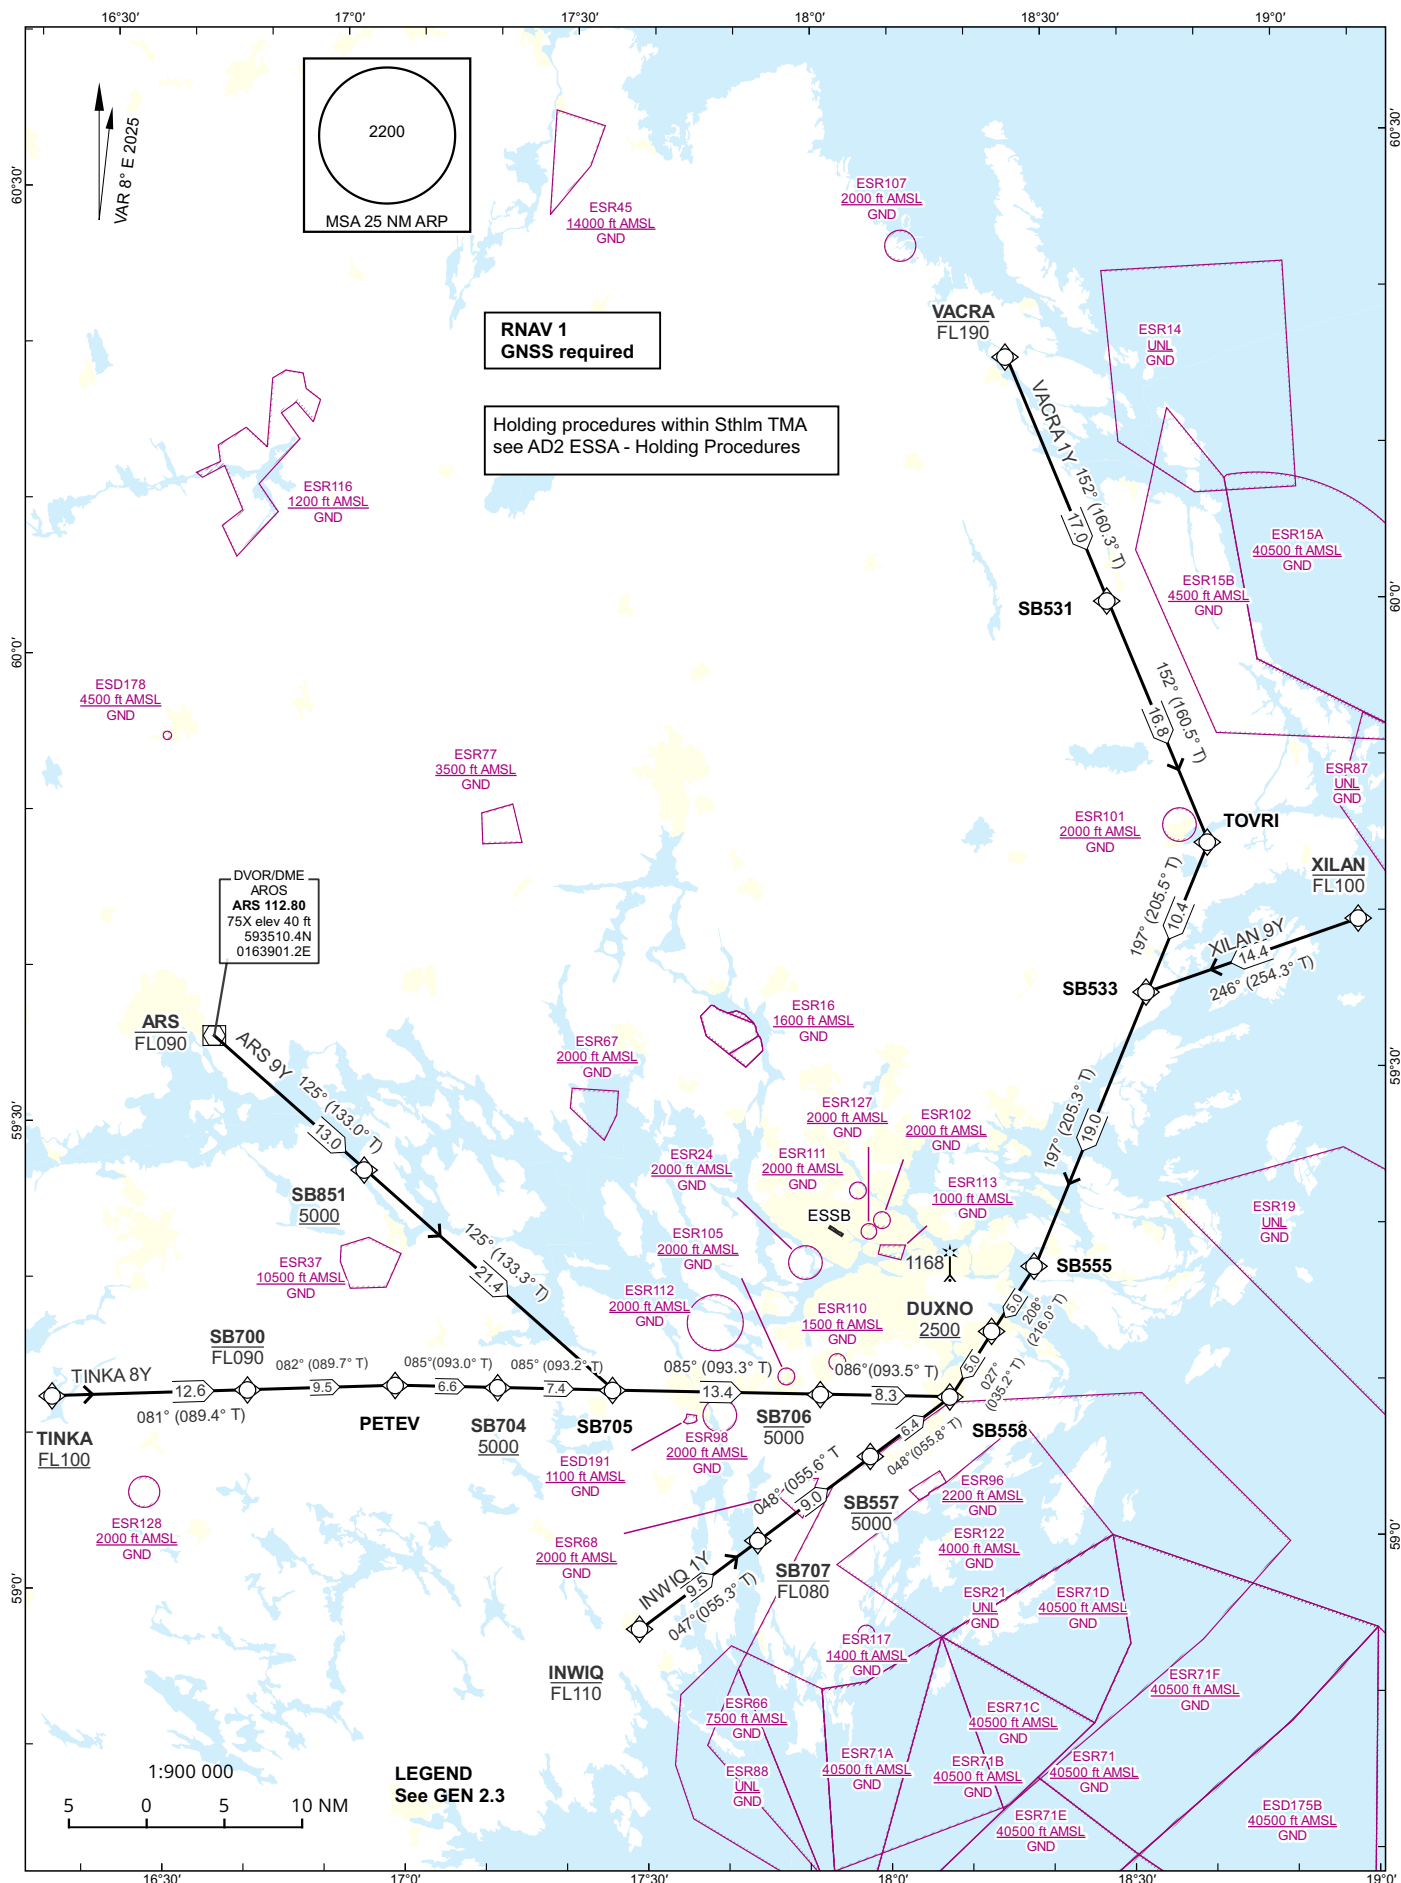

CHANGE: ESR209A and ESR209B withdrawn. Editorial.

Prescribed Coding of RNAV STAR for RWY 30

REMARK:

Descent to a minimum altitude for an arrival route must not be initiated until an ATC clearance to this altitude or an approach clearance has been received.

Aircraft to STOCKHOLM/Bromma shall not be operated at an airspeed of more than 250 kt IAS below FL100 unless otherwise instructed.

All RNAV STARs are based on GNSS for position update.

Operators receiving clearance via RNAV STAR and are unable flying RNAV1 shall inform ATC by using phraseology "UNABLE RNAV STAR". ATC will then provide vectors or issue clearance to a navigation aid.

If the airborne RNAV equipment fails or if the position update is malfunctioning, ATC shall be informed as soon as practicable. ATC will then provide vectors.

ARS 9Y (AROS NINE YANKEE ARRIVAL)

Path Term	Waypoint Identifier	Fly-over	Course °M(°T)	Dist (NM)	Turn Dir	Altitude (ft AMSL)	Speed Limits (kt)	VPA/RDH (°/ft)	Rec Navaid	Nav Spec
IF	ARS	-	-	-	-	-FL090	-	-	-	RNAV 1
TF	SB851	-	125° (133.0°)	13.0	-	+5000	-	-	-	RNAV 1
TF	SB705	-	125° (133.3°)	21.4	-	-	-	-	-	RNAV 1
TF	SB706	-	085° (093.3°)	13.4	-	-5000	-	-	-	RNAV 1
TF	SB558	-	086° (093.5°)	8.3	-	-	-	-	-	RNAV 1
TF	DUXNO	-	027° (035.2°)	5.0	-	+2500	-	-	-	RNAV 1

STAR instruction: ARS (FL090 or below) – SB851 (5000 ft or above) – SB705 – SB706 (5000 ft or below) – SB558 – DUXNO (2500 ft or above)

INWIQ 1Y (INWIQ ONE YANKEE ARRIVAL)

Path Term	Waypoint Identifier	Fly-over	Course °M(°T)	Dist (NM)	Turn Dir	Altitude (ft AMSL)	Speed Limits (kt)	VPA/RDH (°/ft)	Rec Navaid	Nav Spec
IF	INWIQ	-	-	-	-	-FL110	-	-	-	RNAV 1
TF	SB707	-	047°(055.3°)	9.5	-	-FL080	-	-	-	RNAV 1
TF	SB557	-	048°(055.6°)	9.0	-	-5000	-	-	-	RNAV 1
TF	SB558	-	048°(055.8°)	6.4	-	-	-	-	-	RNAV 1
TF	DUXNO	-	027°(035.2°)	5.0	-	+2500	-	-	-	RNAV 1

STAR instruction: INWIQ (FL110 or below) – SB707 (FL080 or below) – SB557 (5000 ft or below) – SB558 – DUXNO (2500 ft or above)

STOCKHOLM/BROMMA

TINKA 8Y (TINKA EIGHT YANKEE ARRIVAL)

Path Term	Waypoint Identifier	Fly-over	Course °M(°T)	Dist (NM)	Turn Dir	Altitude (ft AMSL)	Speed Limits (kt)	VPA/RDH (°/ft)	Rec Navaid	Nav Spec
IF	TINKA	-	-	-	-	+FL100	-	-	-	RNAV 1
TF	SB700	-	081°(089.4 °)	12.6	-	-FL090	-	-	-	RNAV 1
TF	PETEV	-	082°(089.7°)	9.5	-	-	-	-	-	RNAV 1
TF	SB704	-	085°(093.0°)	6.6	-	+5000	-	-	-	RNAV 1
TF	SB705	-	085°(093.2°)	7.4	-	-	-	-	-	RNAV 1
TF	SB706	-	085°(093.3°)	13.4	-	-5000	-	-	-	RNAV 1
TF	SB558	-	086°(093.5°)	8.3	-	-	-	-	-	RNAV 1
TF	DUXNO	-	027°(035.2°)	5.0	-	+2500	-	-	-	RNAV 1

STAR instruction: TINKA (FL100 or above) – SB700 (FL090 or below) – PETEV – SB704 (5000 ft or above) – SB705 – SB706 (5000 ft or below) – SB558 – DUXNO (2500 ft or above)

VACRA 1Y (VACRA ONE YANKEE ARRIVAL)

Path Term	Waypoint Identifier	Fly-over	Course °M(°T)	Dist (NM)	Turn Dir	Altitude (ft AMSL)	Speed Limits (kt)	VPA/RDH (°/ft)	Rec Navaid	Nav Spec
IF	VACRA	-	-	-	-	- FL190	-	-	-	RNAV 1
TF	SB531	-	152°(160.3°)	17.0	-	-	-	-	-	RNAV 1
TF	TOVRI	-	152°(160.5°)	16.8	-	-	-	-	-	RNAV 1
TF	SB533	-	197°(205.5°)	10.4	-	-	-	-	-	RNAV 1
TF	SB555	-	197°(205.3°)	19.0	-	-	-	-	-	RNAV 1
TF	DUXNO	-	208°(216.0°)	5.0	-	+2500	-	-	-	RNAV 1

STAR instruction: VACRA (FL190 or below) – SB531 – TOVRI – SB533 – SB555 – DUXNO (2500 ft or above)

XILAN 9Y (XILAN NINE YANKEE ARRIVAL)

Path Term	Waypoint Identifier	Fly-over	Course °M(°T)	Dist (NM)	Turn Dir	Altitude (ft AMSL)	Speed Limits (kt)	VPA/RDH (°/ft)	Rec Navaid	Nav Spec
IF	XILAN	-	-	-	-	- FL100	-	-	-	RNAV 1
TF	SB533	-	246°(254.3°)	14.4	-	-	-	-	-	RNAV 1
TF	SB555	-	197°(205.3°)	19.0	-	-	-	-	-	RNAV 1
TF	DUXNO	-	208°(216.0°)	5.0	-	+2500	-	-	-	RNAV 1

STAR instruction: XILAN (FL100 or below) – SB533 – SB555 – DUXNO (2500 ft or above)