
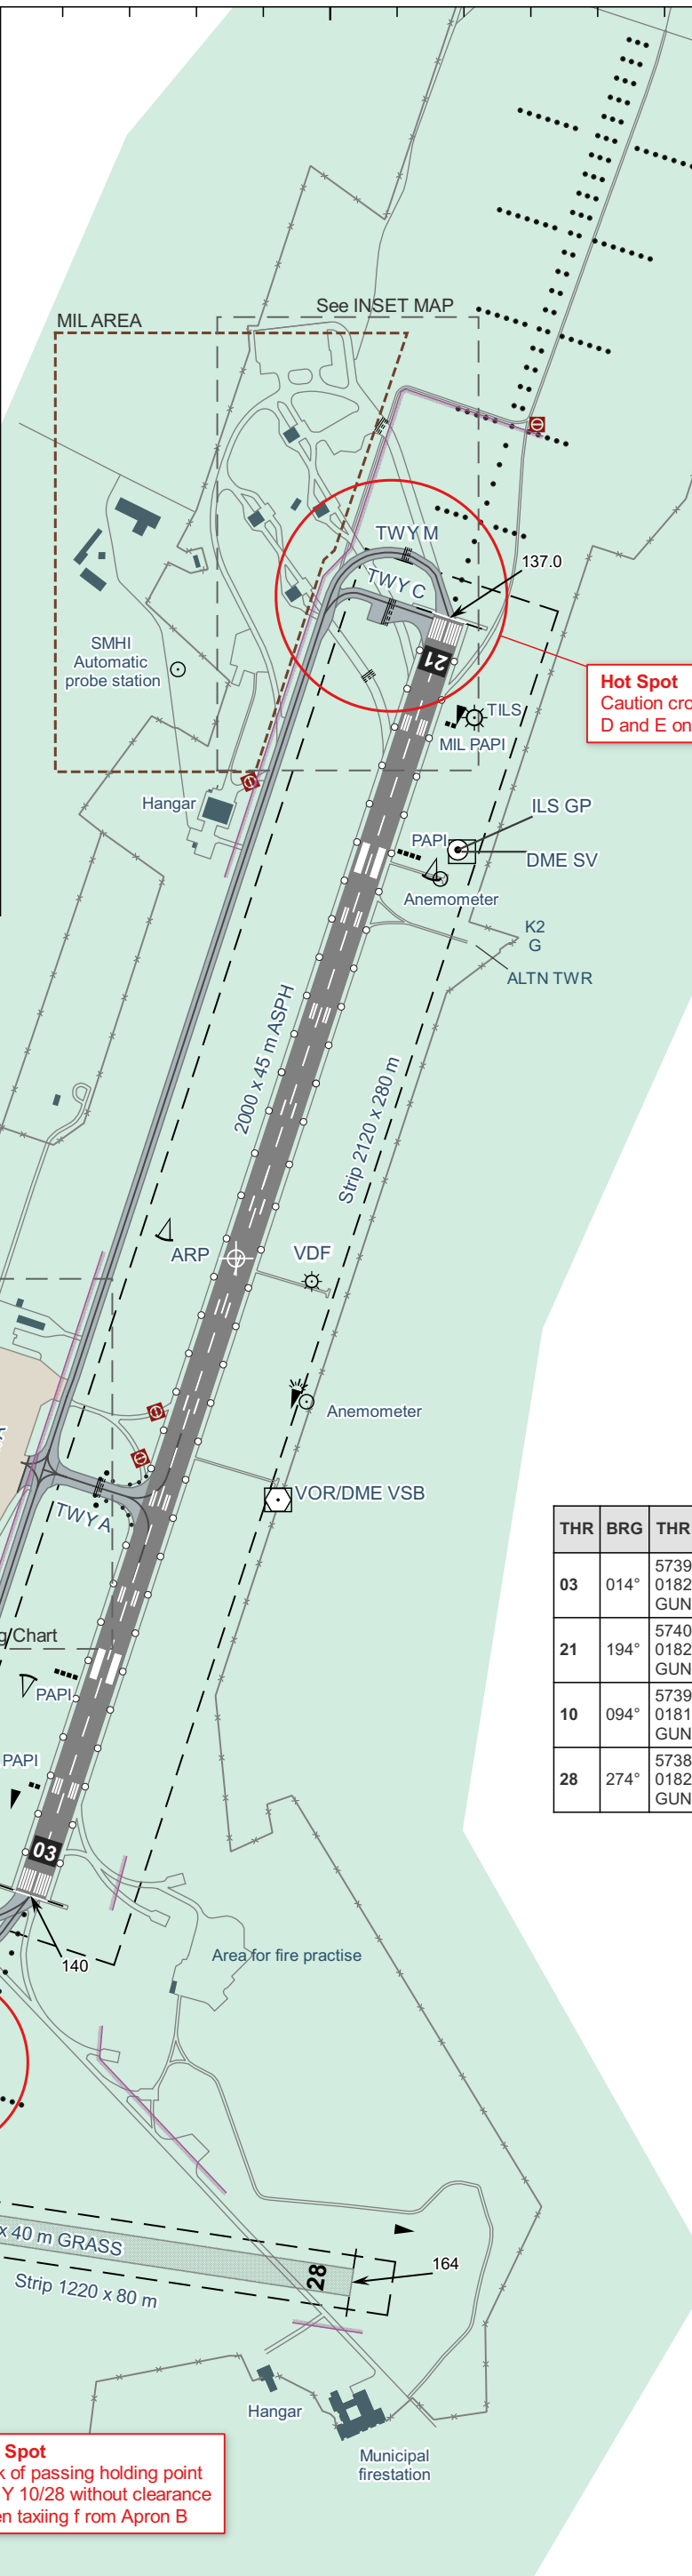


AERODROME CHART - ICAO

TWR: 120.305

VISBY

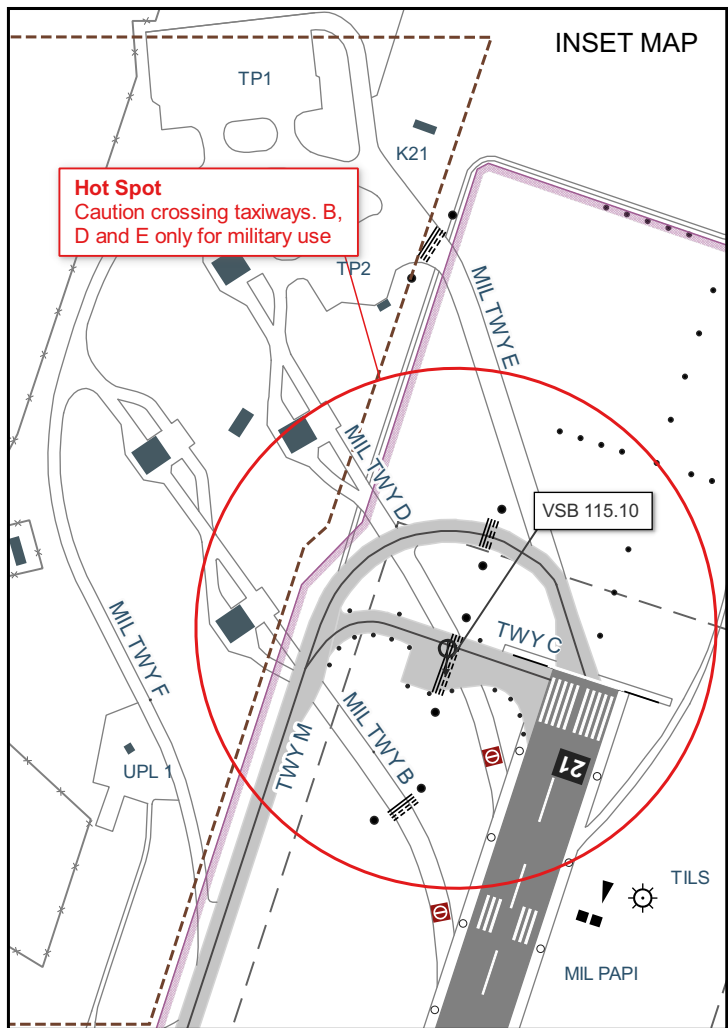

ARP: 573946N 0182046E
AD ELEV: 164 ft
LEGEND See GEN 2.3
 Dimensions in m.
 ELEV in feet.
 Bearings are magnetic.
 RWY/TWY markings/lightings, see ESSV AD 2.9.
 Declared Distances, see ESSV AD 2.13
 Approach and Runway lighting, see ESSV AD 2.14.
SPECIAL REGULATIONS:
 TWY B, D, E and F only available for MIL traffic.
 TWY M available during daylight for CIV traffic aircraft code A, B and C with wheelbase below 18 m.
REMARK: 91 UL available during daylight.


Hot Spot
 Caution crossing taxiways. B, D and E only for military use

Hot Spot
 Risk of passing holding point RWY 03 without clearance when taxiing from RWY 10/28

Hot Spot
 Risk of passing holding point RWY 10/28 without clearance when taxiing from Apron B

THR	BRG	THR POS, GUND	Bearing Strength	THR ELEV TDZ ELEV	VASIS (MEHT)
03	014°	573915.89N 0182024.75E GUND 82 ft	ASPH PCN 50 F/A/X/T	THR 140 ft	PAPI LEFT /3.00° (55.8 ft)
21	194°	574016.25N 0182107.96E GUND 81.7 ft	ASPH PCN 50 F/A/X/T	THR 137.0 ft TDZ 137.8 ft	PAPI LEFT /3.00° (61.7 ft)
10	094°	573903.56N 0181946.75E GUND 82 ft	GRASS	THR 142 ft	-
28	274°	573856.53N 0182051.80E GUND 82 ft	GRASS	THR 164 ft	-

TWY	Bearing Strength	Width
A	ASPH PCN 50 F/A/X/T	20 m
C	ASPH PCN 44 F/A/X/T	15 m
G	GRASS	6 m
K	ASPH	6 m
M	ASPH PCN 50 F/A/X/T	15 m



CHANGE: Fuel, Strip dimension, Editorial.